



Features:

- Lead free, Halogen free, RoHS and REACH compliant
- -55°C to 125°C operating temperature range
- EIA sizes 0402, 0603, 0805, 1206, 1210 and 1812
- Capacitance offering from 0.1 pF to 0.1 uF



Construction



- 1 - Ceramic layers (dielectric)
- 2 - Inner electrodes
- 3 - Base termination
- 4 - Nickel plating layer
- 5 - Tin plating layer

Electrical Specifications

Type/Code	Dielectric Code	Standard Tolerance		Capacitance Range	
		Code	Description	50V	100V
CML0402	C0G	C	± 0.25 pF	0.1 pF - 8.2 pF	-
		J	$\pm 5\%$	10 pF - 1000 pF	-
CML0603	C0G	C	± 0.25 pF	0.1 pF - 6.8 pF	0.5 pF - 8.2 pF
		J	$\pm 5\%$	10 pF - 6800 pF	10 pF - 1000 pF
CML0805	C0G	C	± 0.25 pF	0.3 pF - 6.8 pF	0.5 pF - 8.2 pF
		J	$\pm 5\%$	10 pF - 0.022 uF	10 pF - 3300 pF
CML1206	C0G	C	± 0.25 pF	0.3 pF - 8.2 pF	0.5 pF - 8.2 pF
		J	$\pm 5\%$	10 pF - 3300 pF 3900 pF - 4700 pF	10 pF - 3300 pF -
CML1210	C0G	C	± 0.25 pF	-	1 pF - 8.2 pF
		J	$\pm 5\%$	10 pF - 0.1 uF	10 pF - 6800 pF
CML1812	C0G	C	± 0.25 pF	-	3 pF - 8.2 pF
		J	$\pm 5\%$	10 pF - 0.1 uF	10 pF - 0.01 uF

Note: Capacitance values < 10 pF: B = ± 0.1 pF may be available
Capacitance values ≥ 10 pF: G = $\pm 2\%$ may be available

How to Order

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
C	M	L	0	4	0	2	C	0	G	1	0	0	J	T	5	0	V
Product Series		Size	Dielectric	Capacitance Range		Tolerance (*)		Packaging			Max Working Voltage						
Code	Description	Code	Code	0.1pF to 0.10uF (E12)		Code	Description	Code	Description	Size and Quantity							
CML	Multilayer Ceramic	0402	C0G	EIA Code	Capacitance	B	± 0.1 pF	T	7" Paper Reel	Refer to Packaging Specifications	50V						
		0603				C	± 0.25 pF		7" Plastic Tape		100V						
		0805				G	± 2%										
		1206				J	± 5%										
		1210															
		1812															

<


(*) Other tolerances may be available. Contact Stackpole.

Capacitance and Voltage Available												
Dielectric		C0G										
EIA	Size	0402	0603		0805		1206		1210		1812	
Code	VDCW	50V	50V	100V	50V	100V	50V	100V	50V	100V	50V	100V
0R1	0.1 pF											
0R2	0.2 pF											
0R3	0.3 pF											
0R4	0.4 pF											
0R5	0.5 pF											
0R6	0.6 pF											
0R7	0.7 pF											
0R8	0.8 pF											
0R9	0.9 pF											
1R0	1 pF											
1R2	1.2 pF											
1R5	1.5 pF											
1R8	1.8 pF											
2R0	2 pF											
2R2	2.2 pF											
2R7	2.7 pF											
3R0	3 pF											
3R3	3.3 pF											
3R9	3.9 pF											
4R7	4.7 pF											
5R0	5 pF											
5R6	5.6 pF											
6R8	6.8 pF											
8R2	8.2 pF											
100	10 pF											
120	12 pF											
150	15 pF											
180	18 pF											
220	22 pF											
270	27 pF											
330	33 pF											
390	39 pF											
470	47 pF											
560	56 pF											
680	68 pF											
820	82 pF											
101	100 pF											
121	120 pF											
151	150 pF											
181	180 pF											
221	220 pF											
271	270 pF											
331	330 pF											
391	390 pF											
471	470 pF											
561	560 pF											
681	680 pF											
751	750 pF											
821	820 pF											
102	1000 pF											
122	1200 pF											
152	1500 pF											
182	1800 pF											
222	2200 pF											
272	2700 pF											
332	3300 pF											
392	3900 pF											
472	4700 pF											
562	5600 pF											
682	6800 pF											
822	8200 pF											
103	0.01 uF											


Capacitance and Voltage Available (cont.)

Dielectric		C0G										
EIA	Size	0402	0603		0805		1206		1210		1812	
Code	VDCW	50V	50V	100V	50V	100V	50V	100V	50V	100V	50V	100V
123	0.012 uF											
153	0.015 uF											
183	0.018 uF											
223	0.022 uF											
273	0.027 uF											
333	0.033 uF											
473	0.047 uF											
563	0.056 uF											
683	0.068 uF											
823	0.082 uF											
104	0.1 uF											

Mechanical Specifications and Packaging Specifications

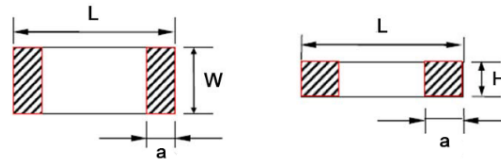


Type/Code	Voltage	Capacitance Value	L	W	H	a	Unit	Packaging (7" Reel) Qty.	
								Paper Tape	Plastic Tape
CML0402C0G	50V	0.1 pF - 1000 pF	0.039 ± 0.008 1.00 ± 0.20	0.020 ± 0.008 0.50 ± 0.20	0.020 ± 0.002 0.50 ± 0.05	0.010 ± 0.004 0.25 ± 0.10	inches mm	10000	-
CML0603C0G	50V - 100V	0.1 pF - 6800 pF	0.063 ± 0.008 1.60 ± 0.20	0.031 ± 0.008 0.80 ± 0.20	0.031 ± 0.004 0.80 ± 0.10	0.012 ± 0.004 0.30 ± 0.10	inches mm	4000	-
CML0805C0G	50V	0.3 pF - 1500 pF 4700 pF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.028 ± 0.002 0.70 ± 0.05	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
		1800 pF - 3900 pF 5600 pF - 8200 pF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.031 ± 0.004 0.80 ± 0.09	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
		0.01 uF - 0.022 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.047 ± 0.004 1.20 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	2000
	100V	0.5 pF - 3300 pF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.031 ± 0.004 0.80 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
CML1206C0G	50V	0.3 pF - 8200 pF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.028 ± 0.002 0.70 ± 0.05	0.024 ± 0.012 0.60 ± 0.30	inches mm	4000	-
		0.01 uF - 0.1 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.063 ± 0.004 1.60 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
	100V	0.5 pF - 3300 pF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.031 ± 0.004 0.80 ± 0.09	0.024 ± 0.012 0.60 ± 0.30	inches mm	4000	-
CML1210C0G	50V	10 pF - 0.1 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.047 ± 0.004 1.20 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	3000
	100V	1 pF - 6800 pF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.047 ± 0.004 1.20 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
CML1812C0G	50V	10 pF - 0.1 uF	0.177 ± 0.016 4.50 ± 0.40	0.126 ± 0.012 3.20 ± 0.30	0.047 ± 0.004 1.20 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	1000
	100V	3 pF - 0.01 uF	0.177 ± 0.016 4.50 ± 0.40	0.126 ± 0.012 3.20 ± 0.30	0.047 ± 0.004 1.20 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	1000

Environmental Characteristics				
Test	Test Specification		Test Condition	
Capacitance	Should be within the specified tolerance.		C0G: (Class I) Cap ≤ 1000 pF 1.0 ± 0.2 Vrms, 1 MHz ± 10% Cap > 1000 pF 1.0 ± 0.2 Vrms, 1 KHz ± 10%	
Dissipation Factor (DF)	C0G (Class I)	DF	Capacitance	Measuring Frequency
		≤ 0.56%	Cr < 5 pF	1 MHz ± 10%
		1.5 [(150 / Cr) + 7] × 10 ⁻⁴	5 pF ≤ Cr < 50 pF	
		≤ 0.15%	50 pF ≤ Cr ≤ 1000 pF	
Insulation Resistance	C0G (Class I)	C ≤ 10 nF, Ri ≥ 50000 MΩ C > 10 nF, Ri*CR ≥ 500 S	> 1000 pF	1 KHz ± 10%
Dielectric Withstanding Voltage	No breakdown or damage.		Measuring voltage: Class I: 300% rated voltage Duration: 1 ~ 5 seconds Charge/Discharge Current: 50 mA max.	
Solderability	At least 95% of the terminal electrode is covered by new solder. Visual appearance: No visible damage.		Preheating Conditions: 80°C to 120°C, 10 ~ 30 seconds	
			Solder Temperature: 235°C ± 5% (Sn/Pb: 63/37) Duration: 2 ± 0.5 seconds	
			Solder Temperature: 245°C ± 5°C (Lead-free) Duration: 2 ± 0.5 seconds	
Resistance to Soldering Heat	Item	C0G	Preheating Conditions: 100°C to 200°C; 10 ± 2 minutes Solder Temperature: 265°C ± 5°C Duration: 10 ± 1 seconds Clean the capacitor with solvent and examine it with a 10X (min.) microscope. Recovery Time: 24 ± 2 hours Recovery Condition: Room temperature.	
	Δ C/C	≤ ± 0.5% or ± 0.5 pF whichever is larger		
	DF	Same to initial value		
	IR	Same to initial value		
Resistance to Flexure of Substrate (Bending Strength)	Appearance: No visible damage. Δ C/C: ≤ ± 10%		Test Board: Al2O3 or PCB Warp: 1 mm Speed: 0.5 mm/second The measurement should be made with the board in the bending position.  Unit: mm	
Termination Adhesion	No visible damage		Applied Force: 5 N Duration: 10 ± 1 seconds	
Temperature Cycle	C0G: Δ C/C: ≤ ± 1% or ± 1 pF, whichever is larger		Preheating Conditions: up-category Temperature: 1 hour Recovery Time: 24 ± 1 hours Initial Measurement	
			Cycling times: 5 times, 1 cycle, 4 steps:	
			Step	Temp. (°C)
			1	Low-category temp. C0G: -55°C
			2	Normal temp. (+20)
			3	Up-category temp. C0G: +125°C
			4	Normal temp. (+20°C)
			Recovery time after test: 24 ± 2 hours	

Environmental Characteristics (cont.)


Test	Test Specification	Test Condition
Moisture Resistance	C0G: $\Delta C/C$: $\leq \pm 2\%$ or ± 1 pF, whichever is larger DF: Not more than twice of initial value. IR: C0G: $R_i \geq 2500$ M Ω or $R_i \cdot CR \geq 25$ S whichever is smaller Appearance: No visible damage	Temperature: $40^\circ\text{C} \pm 2^\circ\text{C}$ Humidity: 90 ~ 95% R.H. Duration: 500 hours Recovery Conditions: Room temperature Recovery Time: 24 hours (Class I)
Life Test	C0G: $\Delta C/C$: $\leq \pm 2\%$ or ± 1 pF, whichever is larger DF: Not more than twice of initial value. IR: C0G: $R_i \geq 4000$ M Ω or $R_i \cdot CR \geq 40$ S whichever is smaller Appearance: No visible damage	Low-voltage (< 100V) Applied Voltage: 1.5 x rated voltage Duration: 1000 hours Temperature: 125°C (C0G) Charge/Discharge Current: 50 mA max. Recovery Conditions: Room temperature Recovery Time: 24 hours (Class I)
Middle and High Voltage Life Test	C0G: $\Delta C/C$: $\leq \pm 2\%$ or ± 1 pF, whichever is larger DF: Not more than twice of initial value. IR: C0G: $R_i \geq 4000$ M Ω or $R_i \cdot CR \geq 40$ S whichever is smaller Appearance: No visible damage	Applied voltage: $100\text{V} \leq \text{rated voltage} < 500\text{V}$: 2 multiple $500\text{V} \leq \text{rated voltage} \leq 1000\text{V}$: 1.5 multiple > 1000V rated voltage: 1.2 multiple Duration: 1000 hours Charge/Discharge Current: 50 mA max. Temperature: 125°C (C0G) Recovery Conditions: Room temperature Recovery Time: 24 hours (Class I)

Reel Specifications



Type/Code	A	B	C	D	E	F	G	Unit
CML_C0G (all sizes)	7.008 ± 0.079 178.00 ± 2.00	0.118 3.00	0.512 ± 0.020 13.00 ± 0.50	0.827 ± 0.031 21.00 ± 0.80	1.969 or more 50.00 or more	0.394 ± 0.059 10.00 ± 1.50	0.472 max 12.00 max	inches mm

Paper Tape Specifications

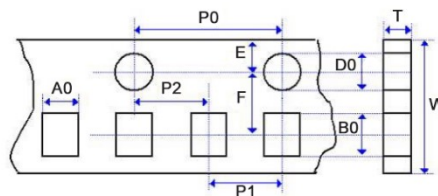


Type/Code	A ₀	B ₀	T	W	P ₀	Unit
CML0402C0G	0.026 ± 0.004 0.65 ± 0.10	0.045 ± 0.004 1.15 ± 0.10	0.031 below 0.80 below	0.315 ± 0.004 8.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	inches mm
CML0603C0G	0.043 ± 0.004 1.10 ± 0.10	0.075 ± 0.004 1.90 ± 0.10	0.043 max 1.10 max	0.315 ± 0.004 8.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	inches mm
CML0805C0G	0.057 ± 0.006 1.45 ± 0.15	0.091 ± 0.006 2.30 ± 0.15	0.043 max 1.10 max	0.315 ± 0.006 8.00 ± 0.15	0.157 ± 0.004 4.00 ± 0.10	inches mm
CML1206C0G	0.071 ± 0.008 1.80 ± 0.20	0.134 ± 0.008 3.40 ± 0.20	0.043 max 1.10 max	0.315 ± 0.008 8.00 ± 0.20	0.157 ± 0.004 4.00 ± 0.10	inches mm

Paper Tape Specifications (cont.)

Type/Code	P ₁	P ₂	D ₀	E	F	Unit
CML0402C0G	0.079 ± 0.002 2.00 ± 0.05	0.079 ± 0.002 2.00 ± 0.05	0.059-0/+0.004 1.5-0/+0.10	0.069 ± 0.002 1.75 ± 0.05	0.138 ± 0.002 3.50 ± 0.05	inches mm
CML0603C0G	0.079 ± 0.004 2.00 ± 0.10	0.157 ± 0.002 4.00 ± 0.05	0.059-0/+0.004 1.5-0/+0.10	0.069 ± 0.002 1.75 ± 0.05	0.138 ± 0.002 3.50 ± 0.05	inches mm
CML0805C0G	0.079 ± 0.004 2.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.059-0/+0.004 1.5-0/+0.10	0.069 ± 0.002 1.75 ± 0.05	0.138 ± 0.002 3.50 ± 0.05	inches mm
CML1206C0G	0.079 ± 0.004 2.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.059-0/+0.004 1.5-0/+0.10	0.069 ± 0.004 1.75 ± 0.10	0.138 ± 0.002 3.50 ± 0.05	inches mm

Plastic Tape Specifications

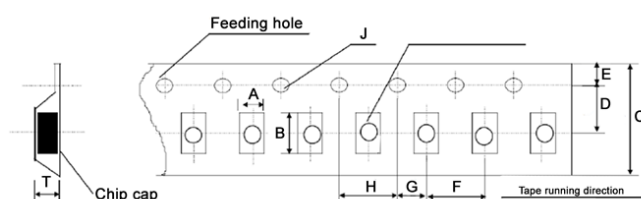

Type/Code	A	B	C	D	E	Unit
CML0805C0G	0.061 ± 0.008 1.55 ± 0.20	0.093 ± 0.008 2.35 ± 0.20	0.315 ± 0.008 8.00 ± 0.20	0.138 ± 0.002 3.50 ± 0.05	0.069 ± 0.004 1.75 ± 0.10	inches mm
CML1206C0G	0.077 ± 0.008 1.95 ± 0.20	0.142 ± 0.008 3.60 ± 0.20	0.315 ± 0.008 8.00 ± 0.20	0.138 ± 0.002 3.50 ± 0.05	0.069 ± 0.004 1.75 ± 0.10	inches mm
CML1210C0G	0.106 ± 0.004 2.70 ± 0.10	0.135 ± 0.004 3.42 ± 0.10	0.315 ± 0.004 8.00 ± 0.10	0.138 ± 0.002 3.50 ± 0.05	0.069 ± 0.004 1.75 ± 0.10	inches mm
CML1812C0G	0.144 ± 0.004 3.66 ± 0.10	0.195 ± 0.004 4.95 ± 0.10	0.472 ± 0.004 12.00 ± 0.10	0.217 ± 0.002 5.50 ± 0.05	0.069 ± 0.004 1.75 ± 0.10	inches mm
Type/Code	F	G	H	J	T	Unit
CML0805C0G	0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.004 2.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.059-0/+0.004 1.5-0/+0.10	0.059 max 1.50 max	inches mm
CML1206C0G	0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.004 2.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.059-0/+0.004 1.5-0/+0.10	0.073 max 1.85 max	inches mm
CML1210C0G	0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.002 2.00 ± 0.05	0.157 ± 0.004 4.00 ± 0.10	0.059-0/+0.004 1.5-0/+0.10	0.126 max 3.20 max	inches mm
CML1812C0G	0.315 ± 0.004 8.00 ± 0.10	0.079 ± 0.002 2.00 ± 0.05	0.157 ± 0.004 4.00 ± 0.10	0.059-0/+0.004 1.5-0/+0.10	0.157 max 4.00 max	inches mm

RoHS Compliance

Stackpole Electronics has joined the worldwide effort to reduce the amount of lead in electronic components and to meet the various regulatory requirements now prevalent, such as the European Union's directive regarding "Restrictions on Hazardous Substances" (RoHS 3). As part of this ongoing program, we periodically update this document with the status regarding the availability of our compliant components. All our standard part numbers are compliant to EU Directive 2011/65/EU of the European Parliament as amended by Directive (EU) 2015/863/EU as regards the list of restricted substances.

RoHS Compliance Status

Standard Product Series	Description	Package / Termination Type	Standard Series RoHS Compliant	Lead-Free Termination Composition	Lead-Free Mfg. Effective Date (Std Product Series)	Lead-Free Effective Date Code (YY/MM)
CML	Multilayer Ceramic Chip Capacitor	SMD	YES	100% Matte Sn over Ni	Always	Always

“Conflict Metals” Commitment

We at Stackpole Electronics, Inc. are joined with our industry in opposing the use of metals mined in the “conflict region” of the eastern Democratic Republic of the Congo (DRC) in our products. Recognizing that the supply chain for metals used in the electronics industry is very complex, we work closely with our own suppliers to verify to the extent possible that the materials and products we supply do not contain metals sourced from this conflict region. As such, we are in compliance with the requirements of Dodd-Frank Act regarding Conflict Minerals.

Compliance to “REACH”


We certify that all passive components supplied by Stackpole Electronics, Inc. are SVHC (Substances of Very High Concern) free and compliant with the requirements of EU Directive 1907/2006/EC, “The Registration, Evaluation, Authorization and Restriction of Chemicals”, otherwise referred to as REACH. Contact us for complete list of REACH Substance Candidate List.

Environmental Policy


It is the policy of Stackpole Electronics, Inc. to protect the environment in all localities in which we operate. We continually strive to improve our effect on the environment. We observe all applicable laws and regulations regarding the protection of our environment and all requests related to the environment to which we have agreed. We are committed to the prevention of all forms of pollution.

Features:

- Lead free, Halogen free, RoHS and REACH compliant
- -55°C to 125°C operating temperature range
- EIA sizes 0402, 0603, 0805, 1206, 1210 and 1812
- Capacitance offering from 100 pF to 47 uF



Construction



- 1 - Ceramic layers (dielectric)
- 2 - Inner electrodes
- 3 - Base termination
- 4 - Nickel plating layer
- 5 - Tin plating layer

Electrical Specifications

Type/Code	Dielectric Code	Standard Tolerance		Capacitance Range				
		Code	Description	10V	16V	25V	50V	100V
CML0402	X7R	K	± 10%	120 pF - 0.039 uF			-	
				0.012 uF - 0.1 uF			-	
CML0603	X7R	K	± 10%	150 pF - 0.1 uF			-	
				0.012 uF - 0.18 uF			-	
				0.12 uF - 0.33 uF			-	
CML0805	X7R	K	± 10%	0.12 uF - 2.2 uF			-	
				150 pF - 0.1 uF			-	
				0.12 uF - 0.39 uF			-	
CML1206	X7R	K	± 10%	-	0.12 uF - 2.2 uF			-
				150 pF - 1 uF			-	
				2.2 uF - 4.7 uF			-	
CML1210	X7R	K	± 10%	-			150 pF - 2.2 uF	
				220 pF - 10 uF			-	
				-	22 uF			-
CML1812	X7R	K	± 10%	47 uF	-			-
				-			270 pF - 1 uF	
				-	470 pF - 4.7 uF			-
				-	6.8 uF			-

Note: J = 5% tolerance may be available


How to Order

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
C	M	L	0	4	0	2	X	7	R	1	0	3	K	T	5	0	V
Product Series		Size		Dielectric		Capacitance Range		Tolerance (*)		Packaging				Max Working Voltage			
Code	Description	Code		Code		EIA Code	Capacitance	Code	Description	Code	Description	Size	Quantity				
CML	Multilayer Ceramic	0402		X7R		101	100 pF	J	± 5%	T	7" Paper Reel	Refer to Packaging Specifications		10V			
		0603					K	± 10%	7" Plastic Tape		16V						
		0805							25V								
		1206							50V								
		1210							100V								
		1812															
(*) Other tolerances may be available. Contact Stackpole.																	

(*) Other tolerances may be available. Contact Stackpole.

Capacitance and Voltage Available																														
Dielectric		X7R																												
EIA	Size	0402				0603				0805				1206					1210					1812						
Code	VDCW	10V	16V	25V	50V	10V	16V	25V	50V	100V	10V	16V	25V	50V	100V	10V	16V	25V	50V	100V	10V	16V	25V	50V	100V	10V	16V	25V	50V	100V
101	100 pF																													
121	120 pF																													
151	150 pF																													
181	180 pF																													
201	200 pF																													
221	220 pF																													
271	270 pF																													
331	330 pF																													
391	390 pF																													
471	470 pF																													
561	560 pF																													
681	680 pF																													
751	750 pF																													
821	820 pF																													
102	1000 pF																													
122	1200 pF																													
152	1500 pF																													
182	1800 pF																													
222	2200 pF																													
272	2700 pF																													
332	3300 pF																													
392	3900 pF																													
472	4700 pF																													
562	5600 pF																													
682	6800 pF																													
822	8200 pF																													
103	0.01 uF																													
123	0.012 uF																													
153	0.015 uF																													
183	0.018 uF																													
223	0.022 uF																													
273	0.027 uF																													
333	0.033 uF																													
393	0.039 uF																													
473	0.047 uF																													
563	0.056 uF																													
683	0.068 uF																													
823	0.082 uF																													
104	0.1 uF																													
124	0.12 uF																													
154	0.15 uF																													
184	0.18 uF																													
224	0.22 uF																													
274	0.27 uF																													
334	0.33 uF																													
394	0.39 uF																													
474	0.47 uF																													
564	0.56 uF																													
684	0.68 uF																													
824	0.82 uF																													
105	1 uF																													
125	1.2 uF																													
155	1.5 uF																													

Mechanical Specifications and Packaging Specifications

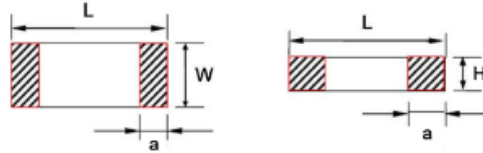


Type/Code	Voltage	Capacitance Range	L	W	H	a	Unit	Packaging (7" Reel) Qty.	
								Paper Tape	Plastic Tape
CML0402X7R	10V - 50V	100 pF - 0.47 uF	0.039 ± 0.008 1.00 ± 0.20	0.020 ± 0.008 0.50 ± 0.20	0.020 ± 0.002 0.50 ± 0.05	0.010 ± 0.004 0.25 ± 0.10	inches mm	10000	-
CML0603X7R	10V - 100V	150 pF - 2.2 uF	0.063 ± 0.008 1.60 ± 0.20	0.031 ± 0.008 0.80 ± 0.20	0.031 ± 0.004 0.80 ± 0.10	0.012 ± 0.004 0.30 ± 0.10	inches mm	4000	-
CML0805X7R	10V	150 pF - 0.33 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.031 ± 0.004 0.80 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
		0.47 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.031 ± 0.004 0.80 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
		0.56 uF - 0.68 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.047 ± 0.004 1.20 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	3000
		0.82 uF - 1 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.039 ± 0.004 1.00 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	3000
		1.5 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.047 ± 0.004 1.20 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	3000
		2.2 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.031 ± 0.004 0.80 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
		3.3 uF - 10 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.047 ± 0.004 1.20 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	2000
	16V	150 pF - 0.33 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.031 ± 0.004 0.80 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
		0.47 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.031 ± 0.004 0.80 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
		0.56 uF - 0.68 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.047 ± 0.004 1.20 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	3000
		0.82 uF - 1 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.039 ± 0.004 1.00 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	3000
		1.5 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.047 ± 0.004 1.20 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	3000
		2.2 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.031 ± 0.004 0.80 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
		3.3 uF - 4.7 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.047 ± 0.004 1.20 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	2000
	25V	150 pF - 0.33 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.031 ± 0.004 0.80 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
		0.47 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.031 ± 0.004 0.80 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
		0.56 uF - 0.68 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.047 ± 0.004 1.20 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	3000
		0.82 uF - 1 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.039 ± 0.004 1.00 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	3000
		1.5 uF - 2.2 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.047 ± 0.004 1.20 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	2000
		3.3 uF - 4.7 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.047 ± 0.004 1.20 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	2000

Mechanical Specifications and Packaging Specifications (cont.)

Type/Code	Voltage	Capacitance Range	L	W	H	a	Unit	Packaging (7" Reel) Qty.	
								Paper Tape	Plastic Tape
CML0805X7R	50V	150 pF - 0.33 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.031 ± 0.004 0.80 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
		0.47 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.031 ± 0.004 0.80 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
		0.56 uF - 0.68 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.047 ± 0.004 1.20 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	3000
		0.82 uF - 1 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.039 ± 0.004 1.00 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	3000
		1.5 uF - 2.2 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.047 ± 0.004 1.20 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	3000
	100V	100 pF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.028 ± 0.020 0.70 ± 0.50	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
		150 pF - 0.047 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.031 ± 0.004 0.80 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
		0.056 uF - 0.1 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.047 ± 0.004 1.20 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	3000
CML1206X7R	10V	200 pF - 0.33 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.031 ± 0.004 0.80 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	4000	-
		0.47 uF - 0.68 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.047 ± 0.004 1.20 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	3000
		0.82 uF - 1.5 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.031 ± 0.004 0.80 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	4000	-
		2.2 uF - 3.3 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.047 ± 0.004 1.20 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	3000
		4.7 uF - 22 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.063 ± 0.004 1.60 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
	16V - 25V	200 pF - 0.33 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.031 ± 0.004 0.80 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	4000	-
		0.47 uF - 0.68 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.047 ± 0.004 1.20 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	3000
		0.82 uF - 1.5 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.031 ± 0.004 0.80 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	4000	-
		2.2 uF - 3.3 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.047 ± 0.004 1.20 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	3000
		4.7 uF - 10 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.063 ± 0.004 1.60 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
	50V	200 pF - 0.33 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.031 ± 0.004 0.80 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	4000	-
		0.47 uF - 0.68 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.047 ± 0.004 1.20 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	3000
		0.82 uF - 1.5 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.031 ± 0.004 0.80 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	4000	-
		2.2 uF - 3.3 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.047 ± 0.004 1.20 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	3000
		4.7 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.063 ± 0.004 1.60 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
	100V	150 pF - 0.056 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.031 ± 0.004 0.80 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	4000	-
		0.068 uF - 0.33 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.047 ± 0.004 1.20 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	3000
		0.47 uF - 1 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.063 ± 0.004 1.60 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000

Mechanical Specifications and Packaging Specifications (cont.)


Type/Code	Voltage	Capacitance Range	L	W	H	a	Unit	Packaging (7" Reel) Qty.	
								Paper Tape	Plastic Tape
CML1210X7R	10V	220 pF - 0.47 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.047 ± 0.004 1.20 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
		0.68 uF - 1 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.063 ± 0.004 1.60 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
		4.7 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.047 ± 0.004 1.20 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
		10 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.071 ± 0.004 1.80 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
		47 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.098 ± 0.010 2.50 ± 0.25	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	500
	16V - 25V	220 pF - 0.47 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.047 ± 0.004 1.20 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
		0.68 uF - 1 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.063 ± 0.004 1.60 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
		4.7 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.047 ± 0.004 1.20 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
		10 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.071 ± 0.004 1.80 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
		22 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.098 ± 0.010 2.50 ± 0.25	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	500
	50V	220 pF - 0.47 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.047 ± 0.004 1.20 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
		0.68 uF - 1 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.063 ± 0.004 1.60 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
		4.7 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.071 ± 0.004 1.80 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
		10 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.098 ± 0.010 2.50 ± 0.25	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	500
	100V	150 pF - 0.22 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.055 ± 0.004 1.40 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
		0.33 uF - 2.2 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.063 ± 0.004 1.60 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
CML1812X7R	16V - 25V	470 pF - 1 uF	0.177 ± 0.016 4.50 ± 0.40	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.004 1.60 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	1000
		1.5 uF - 6.8 uF	0.177 ± 0.016 4.50 ± 0.40	0.126 ± 0.012 3.20 ± 0.30	0.071 ± 0.004 1.80 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	1000
	50V	470 pF - 1 uF	0.177 ± 0.016 4.50 ± 0.40	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.004 1.60 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	1000
		1.5 uF - 4.7 uF	0.177 ± 0.016 4.50 ± 0.40	0.126 ± 0.012 3.20 ± 0.30	0.071 ± 0.004 1.80 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	1000
	100V	270 pF - 0.56 uF	0.177 ± 0.016 4.50 ± 0.40	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.004 1.60 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	1000
		0.68 uF - 1 uF	0.177 ± 0.016 4.50 ± 0.40	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.009 1.60 ± 0.24	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	500

Environmental Characteristics									
Test	Test Specification						Test Condition		
Capacitance	Should be within the specified tolerance.						X7R: (Class II) Cap ≤ 10uF 1.0 ± 0.2 Vrms, 1 KHz ± 10% Cap > 10uF 0.5 ± 0.1 Vrms, 120 Hz ± 10%		
Dissipation Factor (DF)	X7R (Class II)	X7R (≥ 0402)	≥ 50V ≤ 2.5%	25V ≤ 3.5% (C < 0.47uF) ≤ 10.0% (C ≥ 0.47uF)	16V ≤ 5% (C < 0.15uF) ≤ 10.0% (C ≥ 0.15 uF)	10V	Cap ≤ 10uF 1.0 ± 0.2 Vrms, 1 KHz ± 10% Cap > 10uF 0.5 ± 0.1 Vrms, 120 Hz ± 10%		
Insulation Resistance	X7R (Class II)	C ≤ 25nF, Ri ≥ 10000M Ω C > 25nF, Ri*CR > 100S				Measuring Voltage: Rated Voltage (Max 500V) Duration: 60 ± 5 seconds Test Humidity: ≤ 75% Test Temperature: 25°C ± 5°C Test Current: ≤ 50 mA			
Dielectric Withstanding Voltage	No breakdown or damage.						Measuring voltage: Class II: 250% rated voltage Duration: 1 ~ 5 seconds Charge/Discharge Current: 50 mA max.		
Solderability	At least 95% of the terminal electrode is covered by new solder. Visual appearance: No visible damage.						Preheating Conditions: 80°C to 120°C, 10 ~ 30 seconds		
							Solder Temperature: 235°C ± 5% (Sn/Pb: 63/37) Duration: 2 ± 0.5 seconds		
							Solder Temperature: 245°C ± 5°C (Lead-free) Duration: 2 ± 0.5 seconds		
Resistance to Soldering Heat	Item	X7R					Preheating Conditions: 100°C to 200°C; 10 ± 2 minutes Solder Temperature: 265°C ± 5°C Duration: 10 ± 1 seconds Clean the capacitor with solvent and examine it with a 10X (min.) microscope. Recovery Time: 24 ± 2 hours Recovery Condition: Room temperature.		
	Δ C/C	-5 ~ + 10%							
	DF	Same to initial value							
	IR	Same to initial value							
	Appearance: No visible damage. At least 95% of the terminal electrode is covered by new solder.								
Resistance to Flexure of Substrate (Bending Strength)	Appearance: No visible damage. Δ C/C: ≤ ± 10%						Test Board: Al2O3 or PCB Warp: 1 mm Speed: 0.5 mm / second The measurement should be made with the board in the bending position. Unit: mm 		
Termination Adhesion	No visible damage						Applied Force: 5 N Duration: 10 ± 1 seconds		
Temperature Cycle	X7R: Δ C/C: ≤ ± 10%						Preheating Conditions: up-category temperature 1 hour Recovery Time: 24 ± 1 hours Initial Measurement Cycling times: 5 times, 1 cycle, 4 steps:		
							Step	Temp. (°C)	Time (min.)
							1	Low-category temp. X7R: -55°C	30 ± 3
							2	Normal temp. (+20°C)	2 - 3
							3	Up-category temp. X7R: +125°C	30 ± 3
							4	Normal temp. (+20°C)	2 - 3
							Recovery time after test: 24 ± 2 hours		

Environmental Characteristics (cont.)


Test	Test Specification	Test Condition
Moisture Resistance	X7R: $\Delta C/C: \leq \pm 10\%$ DF: Not more than twice of initial value. IR: X7R: $R_i \geq 1000M \Omega$ or $R_i \cdot CR \geq 25S$ whichever is smaller Appearance: No visible damage	Temperature: $40^\circ C \pm 2^\circ C$ Humidity: 90 ~ 95% R.H. Duration: 500 hours Recovery Conditions: Room temperature Recovery Time: 48 hours (Class II)
Life Test	X7R: $\Delta C/C: \leq \pm 20\%$ DF: Not more than twice of initial value. IR: X7R: $R_i \geq 2000M \Omega$ or $R_i \cdot CR \geq 50 S$ whichever is smaller Appearance: No visible damage	Low-voltage ($< 100V$) Applied Voltage: 1.5 x rated voltage Duration: 1000 hours Temperature: $125^\circ C$ (X7R) Charge/Discharge Current: 50 mA max. Recovery Conditions: Room temperature Recovery Time: 48 hours (Class II)
Middle and High Voltage Life Test	X7R: $\Delta C/C: \leq \pm 20\%$ DF: Not more than twice of initial value. IR: X7R: $R_i \geq 2000M \Omega$ or $R_i \cdot CR \geq 50 S$ whichever is smaller Appearance: No visible damage	Applied voltage: $100V \leq \text{rated voltage} < 500V$: 2 multiple $500V \leq \text{rated voltage} \leq 1000V$: 1.5 multiple $> 1000V$ rated voltage: 1.2 multiple Duration: 1000 hours Charge/Discharge Current: 50 mA max. Temperature: $125^\circ C$ (X7R) Recovery Conditions: Room temperature Recovery Time: 48 hours (Class II)

Reel Specifications

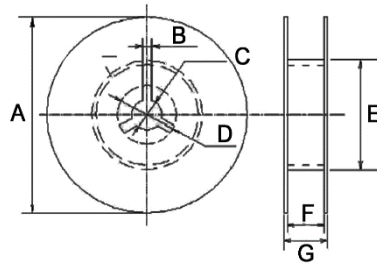

Type/Code	A	B	C	D	E	F	G	Unit
CML_X7R (all sizes)	7.008 ± 0.079 178.00 ± 2.00	0.118 3.00	0.512 ± 0.020 13.00 ± 0.50	0.827 ± 0.031 21.00 ± 0.80	1.969 or more 50.00 or more	0.394 ± 0.059 10.00 ± 1.50	0.472 max 12.00 max	inches mm

Paper Tape Specifications

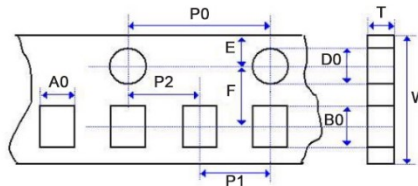


Type/Code	A0	B0	T	W	P0	Unit
CML0402X7R	0.026 ± 0.004 0.65 ± 0.10	0.045 ± 0.004 1.15 ± 0.10	0.031 below 0.80 below	0.315 ± 0.004 8.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	inches mm
CML0603X7R	0.043 ± 0.004 1.10 ± 0.10	0.075 ± 0.004 1.90 ± 0.10	0.043 max 1.10 max	0.315 ± 0.004 8.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	inches mm
CML0805X7R	0.057 ± 0.006 1.45 ± 0.15	0.091 ± 0.006 2.30 ± 0.15	0.043 max 1.10 max	0.315 ± 0.006 8.00 ± 0.15	0.157 ± 0.004 4.00 ± 0.10	inches mm
CML1206X7R	0.071 ± 0.008 1.80 ± 0.20	0.134 ± 0.008 3.40 ± 0.20	0.043 max 1.10 max	0.315 ± 0.008 8.00 ± 0.20	0.157 ± 0.004 4.00 ± 0.10	inches mm

Paper Tape Specifications (cont.)

Type/Code	P1	P2	D0	E	F	Unit
CML0402X7R	0.079 ± 0.002 2.00 ± 0.05	0.079 ± 0.002 2.00 ± 0.05	0.059-0/+0.004 1.5-0/+0.10	0.069 ± 0.002 1.75 ± 0.05	0.138 ± 0.002 3.50 ± 0.05	inches mm
CML0603X7R	0.079 ± 0.004 2.00 ± 0.10	0.157 ± 0.002 4.00 ± 0.05	0.059-0/+0.004 1.5-0/+0.10	0.069 ± 0.002 1.75 ± 0.05	0.138 ± 0.002 3.50 ± 0.05	inches mm
CML0805X7R	0.079 ± 0.004 2.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.059-0/+0.004 1.5-0/+0.10	0.069 ± 0.002 1.75 ± 0.05	0.138 ± 0.002 3.50 ± 0.05	inches mm
CML1206X7R	0.079 ± 0.004 2.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.059-0/+0.004 1.5-0/+0.10	0.069 ± 0.004 1.75 ± 0.10	0.138 ± 0.002 3.50 ± 0.05	inches mm

Plastic Tape Specifications

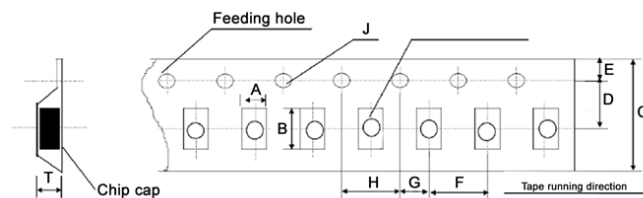

Type/Code	A	B	C	D	E	Unit
CML0805X7R	0.061 ± 0.008 1.55 ± 0.20	0.093 ± 0.008 2.35 ± 0.20	0.315 ± 0.008 8.00 ± 0.20	0.138 ± 0.002 3.50 ± 0.05	0.069 ± 0.004 1.75 ± 0.10	inches mm
CML1206X7R	0.077 ± 0.008 1.95 ± 0.20	0.142 ± 0.008 3.60 ± 0.20	0.315 ± 0.008 8.00 ± 0.20	0.138 ± 0.002 3.50 ± 0.05	0.069 ± 0.004 1.75 ± 0.10	inches mm
CML1210X7R	0.106 ± 0.004 2.70 ± 0.10	0.135 ± 0.004 3.42 ± 0.10	0.315 ± 0.004 8.00 ± 0.10	0.138 ± 0.002 3.50 ± 0.05	0.069 ± 0.004 1.75 ± 0.10	inches mm
CML1812X7R	0.144 ± 0.004 3.66 ± 0.10	0.195 ± 0.004 4.95 ± 0.10	0.472 ± 0.004 12.00 ± 0.10	0.217 ± 0.002 5.50 ± 0.05	0.069 ± 0.004 1.75 ± 0.10	inches mm
Type/Code	F	G	H	J	T	Unit
CML0805X7R	0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.004 2.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.059-0/+0.004 1.5-0/+0.10	0.059 max 1.50 max	inches mm
CML1206X7R	0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.004 2.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.059-0/+0.004 1.5-0/+0.10	0.073 max 1.85 max	inches mm
CML1210X7R	0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.002 2.00 ± 0.05	0.157 ± 0.004 4.00 ± 0.10	0.059-0/+0.004 1.5-0/+0.10	0.126 max 3.20 max	inches mm
CML1812X7R	0.315 ± 0.004 8.00 ± 0.10	0.079 ± 0.002 2.00 ± 0.05	0.157 ± 0.004 4.00 ± 0.10	0.059-0/+0.004 1.5-0/+0.10	0.157 max 4.00 max	inches mm

RoHS Compliance

Stackpole Electronics has joined the worldwide effort to reduce the amount of lead in electronic components and to meet the various regulatory requirements now prevalent, such as the European Union's directive regarding "Restrictions on Hazardous Substances" (RoHS 3). As part of this ongoing program, we periodically update this document with the status regarding the availability of our compliant components. All our standard part numbers are compliant to EU Directive 2011/65/EU of the European Parliament as amended by Directive (EU) 2015/863/EU as regards the list of restricted substances.

RoHS Compliance Status

Standard Product Series	Description	Package / Termination Type	Standard Series RoHS Compliant	Lead-Free Termination Composition	Lead-Free Mfg. Effective Date (Std Product Series)	Lead-Free Effective Date Code (YY/MM)
CML	Multilayer Ceramic Chip Capacitor	SMD	YES	100% Matte Sn over Ni	Always	Always

“Conflict Metals” Commitment

We at Stackpole Electronics, Inc. are joined with our industry in opposing the use of metals mined in the “conflict region” of the eastern Democratic Republic of the Congo (DRC) in our products. Recognizing that the supply chain for metals used in the electronics industry is very complex, we work closely with our own suppliers to verify to the extent possible that the materials and products we supply do not contain metals sourced from this conflict region. As such, we are in compliance with the requirements of Dodd-Frank Act regarding Conflict Minerals.

Compliance to “REACH”


We certify that all passive components supplied by Stackpole Electronics, Inc. are SVHC (Substances of Very High Concern) free and compliant with the requirements of EU Directive 1907/2006/EC, “The Registration, Evaluation, Authorization and Restriction of Chemicals”, otherwise referred to as REACH. Contact us for complete list of REACH Substance Candidate List.

Environmental Policy


It is the policy of Stackpole Electronics, Inc. to protect the environment in all localities in which we operate. We continually strive to improve our effect on the environment. We observe all applicable laws and regulations regarding the protection of our environment and all requests related to the environment to which we have agreed. We are committed to the prevention of all forms of pollution.

Features:

- Lead free, Halogen free, RoHS and REACH compliant
- -30°C to 85°C operating temperature range
- EIA sizes 0402, 0603, 0805, 1206, 1210 and 1812
- Capacitance offering from 1000 pF to 22 uF



Construction



- 1 - Ceramic layers (dielectric)
- 2 - Inner electrodes
- 3 - Base termination
- 4 - Nickel plating layer
- 5 - Tin plating layer

Electrical Specifications

Electrical Specifications									
Type / Code	Dielectric Code	Standard Tolerance		Capacitance Range					
		Code	Description	10V	16V	25V	50V	100V	
CML0402	Y5V	Z	+80% / - 20%	1000 pF - 0.1 uF					-
				0.12 uF - 0.18 uF			-		
				0.12 uF - 0.47 uF		-			
				0.12 uF - 1 uF	-				
CML0603	Y5V	Z	+80% / - 20%	10000 pF - 0.1 uF					
				10000 pF - 0.82 uF					-
				0.18 uF - 2.2 uF			-		
CML0805	Y5V	Z	+80% / - 20%	0.012 uF - 0.1 uF					
				1 uF - 4.7 uF			-		
CML1206	Y5V	Z	+80% / - 20%	10000 pF - 1 uF					
				2.2 uF - 4.7 uF					-
				10 uF		-			
CML1210	Y5V	Z	+80% / -	-					0.015 uF - 1 uF
CML1812	Y5V	Z	+80% / -	-					0.15 uF - 2.2 uF

Note: M = ±20% tolerance may be available

How to Order

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
C	M	L	0	4	0	2	Y	5	V	1	0	3	Z	T	5	0	V


Product Series		Size	Dielectric	Capacitance Range		Tolerance (*)		Packaging				Max Working Voltage
Code	Description	Code	Code	0.1pF to 0.10uF (E6)		Code	Description	Code	Description	Size	Quantity	
CML	Multilayer Ceramic	0402	Y5V	EIA Code	Capacitance	M	± 20%	T	7" Paper Reel	Refer to Packaging Specifications		10V
		0603		102	1000 pF	Z	+80%/-20%		7" Plastic Tape	16V		
		0805		103	0.01 uF					25V		
		1206		104	0.1 uF					50V		
		1210		105	1 uF					100V		
		1812		106	10 uF							

(*) Other tolerances may be available. Contact


(*) Other tolerances may be available. Contact

Capacitance and Voltage Available																						
Dielectric		Y5V																				
EIA	Size	0402				0603					0805					1206					1210	1812
Code	VDCW	10V	16V	25V	50V	10V	16V	25V	50V	100	10V	16V	25V	50V	100V	10V	16V	25V	50V	100V	10V	16V
102	1000 pF																					
122	1200 pF																					
152	1500 pF																					
182	1800 pF																					
222	2200 pF																					
272	2700 pF																					
332	3300 pF																					
392	3900 pF																					
472	4700 pF																					
562	5600 pF																					
682	6800 pF																					
822	8200 pF																					
103	0.01 uF																					
123	0.012 uF																					
153	0.015 uF																					
183	0.018 uf																					
223	0.022 uF																					
273	0.027 uF																					
333	0.033 uF																					
393	0.039 uF																					
473	0.047 uF																					
563	0.056 uF																					
683	0.068 uF																					
823	0.082 uF																					
104	0.1 uF																					
124	0.12 uF																					
154	0.15 uF																					
224	0.22 uF																					
334	0.33 uF																					
394	0.39 uF																					
474	0.47 uF																					
564	0.56 uF																					
684	0.68 uF																					
824	0.82 uF																					
105	1 uF																					
125	1.2 uF																					
135	1.3 uF																					
155	1.5 uF																					
225	2.2 uF																					
335	3.3 uF																					
475	4.7 uF																					
685	6.8 uF																					
106	10 uF																					
226	22 uF																					

Mechanical Specifications and Packaging Specifications

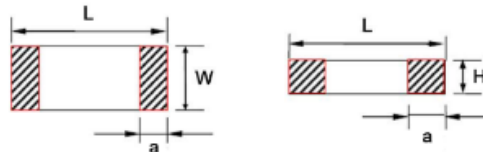


Type / Code	Voltage	Capacitance Range	L	W	H	a	Unit	Packaging (7" Reel) Qty.	
								Paper Tape	Plastic Tape
CML0402Y5V	10V - 50V	1000 pF - 1 uF	0.039 ± 0.008 1.00 ± 0.20	0.020 ± 0.008 0.50 ± 0.20	0.020 ± 0.002 0.50 ± 0.05	0.010 ± 0.004 0.25 ± 0.10	inches mm	10000	-
CML0603Y5V	10V - 100V	1000 pF - 10 uF	0.063 ± 0.008 1.60 ± 0.20	0.031 ± 0.008 0.80 ± 0.20	0.031 ± 0.004 0.80 ± 0.09	0.012 ± 0.004 0.30 ± 0.10	inches mm	4000	-
CML0805Y5V	10V	1000 pF - 0.22 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.028 ± 0.020 0.70 ± 0.50	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
		0.33 uF - 2.2 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.031 ± 0.004 0.80 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
		3.3 uF - 22 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.047 ± 0.004 1.20 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	3000
	16V	1000 pF - 0.22 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.028 ± 0.002 0.70 ± 0.05	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
		0.33 uF - 2.2 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.031 ± 0.004 0.80 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
		3.3 uF - 10 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.047 ± 0.004 1.20 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	3000
	25V	1000 pF - 0.22 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.028 ± 0.002 0.70 ± 0.05	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
		0.33 uF - 2.2 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.031 ± 0.004 0.80 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
		3.3 uF - 4.7 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.047 ± 0.004 1.20 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	3000
	50V	1000 pF - 0.22 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.028 ± 0.002 0.70 ± 0.05	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
		0.33 uF - 2.2 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.031 ± 0.004 0.80 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
	100V	0.01 uF - 0.1 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.028 ± 0.002 0.70 ± 0.05	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
CML1206Y5V	10V - 16V	1000 pF - 10 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.031 ± 0.004 0.80 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	4000	-
		22 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.063 ± 0.004 1.60 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
	25V	1000 pF - 10 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.031 ± 0.004 0.80 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	4000	-
	50V - 100V	1000 pF - 10 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.031 ± 0.004 0.80 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	4000	-
		1000 pF - 4.7 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.031 ± 0.004 0.80 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	4000	-
CML1210Y5V	100V	0.015 uF - 1 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.039 ± 0.004 1.00 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
CML1812Y5V	100V	0.15 uF - 2.2 uF	0.177 ± 0.016 4.50 ± 0.40	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.004 1.60 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	1000

Environmental Characteristics							
Test	Test Specification				Test Condition		
Capacitance	Should be within the specified tolerance.				Y5V: (Class II) Cap ≤ 10uF 1.0 ± 0.2 Vrms, 1 KHz ± 10% Cap > 10uF 0.5 ± 0.1 Vrms, 120 Hz ± 10%		
Dissipation Factor (DF)	Y5V (Class II)	≥ 25V ≤ 7% (C < 1uF) ≤ 9% (C ≥ 1uF)	16V ≤ 15%	10V ≤ 15%	Cap ≤ 10uF 1.0 ± 0.2 Vrms, 1 KHz ± 10% Cap > 10uF 0.5 ± 0.1 Vrms, 120 Hz ± 10%		
Insulation Resistance	Y5V (Class II)	C ≤ 25 nF, Ri ≥ 4,000 MΩ C > 25 nF, Ri*CR > 100 S			Measuring Voltage: Rated Voltage (Max 500V) Duration: 60 ± 5 seconds Test Humidity: ≤ 75% Test Temperature: 25°C ± 5°C Test Current: ≤ 50 mA		
Dielectric Withstanding Voltage	No breakdown or damage.				Measuring voltage: Class II: 250% rated voltage Duration: 1 ~ 5 seconds Charge/Discharge Current: 50 mA max.		
Solderability	At least 95% of the terminal electrode is covered by new solder. Visual appearance: No visible damage.				Preheating Conditions: 80°C to 120°C, 10 ~ 30 seconds		
					Solder Temperature: 235°C ± 5% (Sn/Pb: 63/37) Duration: 2 ± 0.5 seconds		
					Solder Temperature: 245°C ± 5 °C (Lead-free) Duration: 2 ± 0.5 seconds		
Resistance to Soldering Heat	Item	Y5V			Preheating Conditions: 100°C to 200°C; 10 ± 2 minutes Solder Temperature: 265°C ± 5°C Duration: 10 ± 1 seconds Clean the capacitor with solvent and examine it with a 10X (min.) microscope. Recovery Time: 24 ± 2 hours Recovery Condition: Room temperature.		
	Δ C/C	-10 ~ +20%					
	DF	Same to initial value					
	IR	Same to initial value					
	Appearance: No visible damage. At least 95% of the terminal electrode is covered by new solder.						
Resistance to Flexure of Substrate (Bending Strength)	Appearance: No visible damage. Δ C/C: ≤ ± 10%				Test Board: Al2O3 or PCB Warp: 1 mm Speed: 0.5 mm / second The measurement should be made with the board in the bending position. Unit: mm 		
Termination Adhesion	No visible damage				Applied Force: 5 N Duration: 10 ± 1 seconds		
Temperature Cycle	Y5V: Δ C/C: ≤ ± 20%				Preheating Conditions: up-category temperature 1 hour Recovery Time: 24 ± 1 hours Initial Measurement Cycling times: 5 times, 1 cycle, 4 steps:		
					Step	Temp. (°C)	Time (min.)
					1	Low-category temp. Y5V: -25 °C	30 ± 3
					2	Normal temp. (+20°C)	2 - 3
					3	Up-category temp. Y5V: +85°C	30 ± 3
					4	Normal temp. (+20°C)	2 - 3
					Recovery time after test: 24 ± 2 hours		

Environmental Characteristics (cont.)


Test	Test Specification	Test Condition
Moisture Resistance	Y5V: $\Delta C/C: \leq \pm 30\%$ DF: Not more than twice of initial value. IR: Y5V: $R_i \geq 1000 M\Omega$ or $R_i \cdot CR \geq 25 S$ whichever is smaller Appearance: No visible damage	Temperature: $40^\circ C \pm 2^\circ C$ Humidity: 90 ~ 95% R.H. Duration: 500 hours Recovery Conditions: Room temperature Recovery Time: 48 hours (Class II)
Life Test	Y5V: $\Delta C/C: \leq \pm 30\%$ DF: Not more than twice of initial value. IR: Y5V: $R_i \geq 2000 M\Omega$ or $R_i \cdot CR \geq 50 S$ whichever is smaller Appearance: No visible damage	Low-voltage (<100V) Applied Voltage: 1.5 x rated voltage Duration: 1000 hours Temperature: $85^\circ C$ (Y5V) Charge/Discharge Current: 50mA max. Recovery Conditions: Room temperature Recovery Time: 48 hours (Class II)
Middle and High Voltage Life Test	Y5V: $\Delta C/C: \leq \pm 30\%$ DF: Not more than twice of initial value. IR: Y5V: $R_i \geq 2000 M\Omega$ or $R_i \cdot CR \geq 50 S$ whichever is smaller Appearance: No visible damage	Applied voltage: $100 V \leq \text{rated voltage} < 500 V$: 2 multiple $500V \leq \text{rated voltage} \leq 1000 V$: 1.5 multiple $> 1000V$ rated voltage: 1.2 multiple Duration: 1000 hours Charge/Discharge Current: 50 mA max. Temperature: $85^\circ C$ (Y5V) Recovery Conditions: Room temperature Recovery Time: 48 hours (Class II)

Reel Specifications



Type/Code	A	B	C	D	E	F	G	Unit
CML_Y5V (all sizes)	7.008 ± 0.079 178.00 ± 2.00	0.118 3.00	0.512 ± 0.020 13.00 ± 0.50	0.827 ± 0.031 21.00 ± 0.80	1.969 or more 50.00 or more	0.394 ± 0.059 10.00 ± 1.50	0.472 max 12.00 max	inches mm

Paper Tape Specifications

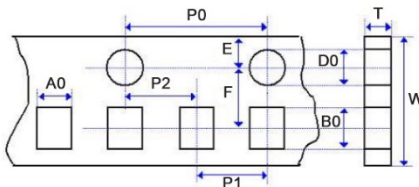


Type/Code	A0	B0	T	W	P0	Unit
CML0402Y5V	0.026 ± 0.004 0.65 ± 0.10	0.045 ± 0.004 1.15 ± 0.10	0.031 below 0.80 below	0.315 ± 0.004 8.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	inches mm
CML0603Y5V	0.043 ± 0.004 1.10 ± 0.10	0.075 ± 0.004 1.90 ± 0.10	0.043 max 1.10 max	0.315 ± 0.004 8.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	inches mm
CML0805Y5V	0.057 ± 0.006 1.45 ± 0.15	0.091 ± 0.006 2.30 ± 0.15	0.043 max 1.10 max	0.315 ± 0.006 8.00 ± 0.15	0.157 ± 0.004 4.00 ± 0.10	inches mm
CML1206Y5V	0.071 ± 0.008 1.80 ± 0.20	0.134 ± 0.008 3.40 ± 0.20	0.043 max 1.10 max	0.315 ± 0.008 8.00 ± 0.20	0.157 ± 0.004 4.00 ± 0.10	inches mm

Paper Tape Specifications (cont.)

Type/Code	P1	P2	D0	E	F	Unit
CML0402Y5V	0.079 ± 0.002 2.00 ± 0.05	0.079 ± 0.002 2.00 ± 0.05	0.059-0/+0.004 1.5-0/+0.10	0.069 ± 0.002 1.75 ± 0.05	0.138 ± 0.002 3.50 ± 0.05	inches mm
CML0603Y5V	0.079 ± 0.004 2.00 ± 0.10	0.157 ± 0.002 4.00 ± 0.05	0.059-0/+0.004 1.5-0/+0.10	0.069 ± 0.002 1.75 ± 0.05	0.138 ± 0.002 3.50 ± 0.05	inches mm
CML0805Y5V	0.079 ± 0.004 2.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.059-0/+0.004 1.5-0/+0.10	0.069 ± 0.002 1.75 ± 0.05	0.138 ± 0.002 3.50 ± 0.05	inches mm
CML1206Y5V	0.079 ± 0.004 2.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.059-0/+0.004 1.5-0/+0.10	0.069 ± 0.004 1.75 ± 0.10	0.138 ± 0.002 3.50 ± 0.05	inches mm

Plastic Tape Specifications

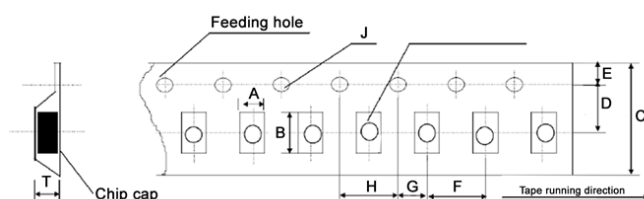

Type/Code	A	B	C	D	E	Unit
CML0805Y5V	0.061 ± 0.008 1.55 ± 0.20	0.093 ± 0.008 2.35 ± 0.20	0.315 ± 0.008 8.00 ± 0.20	0.138 ± 0.002 3.50 ± 0.05	0.069 ± 0.004 1.75 ± 0.10	inches mm
CML1206Y5V	0.077 ± 0.008 1.95 ± 0.20	0.142 ± 0.008 3.60 ± 0.20	0.315 ± 0.008 8.00 ± 0.20	0.138 ± 0.002 3.50 ± 0.05	0.069 ± 0.004 1.75 ± 0.10	inches mm
CML1210Y5V	0.106 ± 0.004 2.70 ± 0.10	0.135 ± 0.004 3.42 ± 0.10	0.315 ± 0.004 8.00 ± 0.10	0.138 ± 0.002 3.50 ± 0.05	0.069 ± 0.004 1.75 ± 0.10	inches mm
CML1812Y5V	0.144 ± 0.004 3.66 ± 0.10	0.195 ± 0.004 4.95 ± 0.10	0.472 ± 0.004 12.00 ± 0.10	0.217 ± 0.002 5.50 ± 0.05	0.069 ± 0.004 1.75 ± 0.10	inches mm
Type/Code	F	G	H	J	T	Unit
CML0805Y5V	0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.004 2.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.059-0/+0.004 1.5-0/+0.10	0.059 max 1.50 max	inches mm
CML1206Y5V	0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.004 2.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.059-0/+0.004 1.5-0/+0.10	0.073 max 1.85 max	inches mm
CML1210Y5V	0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.002 2.00 ± 0.05	0.157 ± 0.004 4.00 ± 0.10	0.059-0/+0.004 1.5-0/+0.10	0.126 max 3.20 max	inches mm
CML1812Y5V	0.315 ± 0.004 8.00 ± 0.10	0.079 ± 0.002 2.00 ± 0.05	0.157 ± 0.004 4.00 ± 0.10	0.059-0/+0.004 1.5-0/+0.10	0.157 max 4.00 max	inches mm

RoHS Compliance

Stackpole Electronics has joined the worldwide effort to reduce the amount of lead in electronic components and to meet the various regulatory requirements now prevalent, such as the European Union's directive regarding "Restrictions on Hazardous Substances" (RoHS 3). As part of this ongoing program, we periodically update this document with the status regarding the availability of our compliant components. All our standard part numbers are compliant to EU Directive 2011/65/EU of the European Parliament as amended by Directive (EU) 2015/863/EU as regards the list of restricted substances.

RoHS Compliance Status

Standard Product Series	Description	Package / Termination Type	Standard Series RoHS Compliant	Lead-Free Termination Composition	Lead-Free Mfg. Effective Date (Std Product Series)	Lead-Free Effective Date Code (YY/MM)
CML	Multilayer Ceramic Chip Capacitor	SMD	YES	100% Matte Sn over Ni	Always	Always

“Conflict Metals” Commitment

We at Stackpole Electronics, Inc. are joined with our industry in opposing the use of metals mined in the “conflict region” of the eastern Democratic Republic of the Congo (DRC) in our products. Recognizing that the supply chain for metals used in the electronics industry is very complex, we work closely with our own suppliers to verify to the extent possible that the materials and products we supply do not contain metals sourced from this conflict region. As such, we are in compliance with the requirements of Dodd-Frank Act regarding Conflict Minerals.

Compliance to “REACH”

We certify that all passive components supplied by Stackpole Electronics, Inc. are SVHC (Substances of Very High Concern) free and compliant with the requirements of EU Directive 1907/2006/EC, “The Registration, Evaluation, Authorization and Restriction of Chemicals”, otherwise referred to as REACH. Contact us for complete list of REACH Substance Candidate List.

Environmental Policy

It is the policy of Stackpole Electronics, Inc. to protect the environment in all localities in which we operate. We continually strive to improve our effect on the environment. We observe all applicable laws and regulations regarding the protection of our environment and all requests related to the environment to which we have agreed. We are committed to the prevention of all forms of pollution.