

# **SPECIFICATIONS**

#### Mechanical

Contact Retention Force: 0.10kg min.

Durability: 25 Cycles

### **Electrical**

**Voltage Rating:** 25V **Current Rating:** 0.5A

Contact Resistance:  $55m\Omega$  max.

Dielectric Withstanding Voltage: 200V AC/1 min.

Insulation Resistance: 100MΩ

### **Physical**

Housing: Thermoplastic, UL 94V-0 rated in Ivory Color

Contact: Copper alloy


Plating: See "ORDERING INFORMATION"

Metal Spring: Copper alloy


**Operating Temperature:** -55% to +85%

### MXM 3.0 Socket

AS Series 4.3mm&5.5mm& 7.8mm Height SMT Type 0.50mm Pitch 314 Pos.



# **DRAWING**

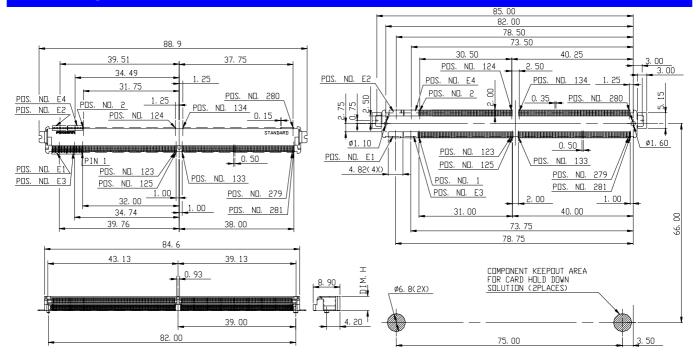

RECOMMENDED PCB LAYOUT

# **ORDERING INFORMATION**

