


## ADC 26 Click

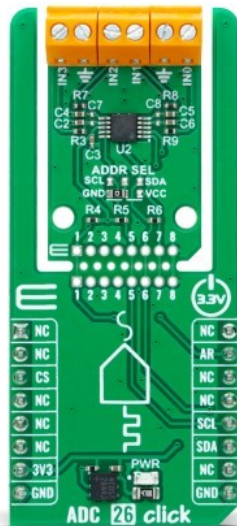

PID: MIKROE-6416

ADC 26 Click is a compact add-on board for precise analog-to-digital signal conversion. This board features the ADS1015L, a low-power 12-bit ADC with an I2C-compatible interface from Texas Instruments. The ADS1015L features a  $\Delta\Sigma$  ADC core with an internal voltage reference, programmable gain amplifier (PGA), and digital comparator, capable of measuring differential signals with a flexible input range from  $\pm 0.256V$  to  $\pm 6.144V$  at up to 3300 samples per second (SPS). It supports single-shot and continuous-conversion modes, offering both energy efficiency and real-time performance. The innovative Click Snap design allows for the detachment of the main IC area for versatile implementation. Ideal for system monitoring, ADC 26 Click excels in applications such as supply voltage tracking, current sensing, temperature measurements, wearables, and personal electronics.

### How does it work?

ADC 26 Click is based on the ADS1015L, a low-power 12-bit analog-to-digital converter (ADC) with an I2C-compatible interface from Texas Instruments. It integrates several key components: a  $\Delta\Sigma$  ADC core, an internal voltage reference, a clock oscillator, a programmable gain amplifier (PGA), and a programmable digital comparator. This combination enables the ADC to deliver conversions at data rates of up to 3300 samples per second (SPS), making it suitable for applications requiring both high speed and low noise.

Mikroe produces entire development toolchains for all major microcontroller architectures.


Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.  
ISO 14001: 2015 certification of environmental management system.  
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

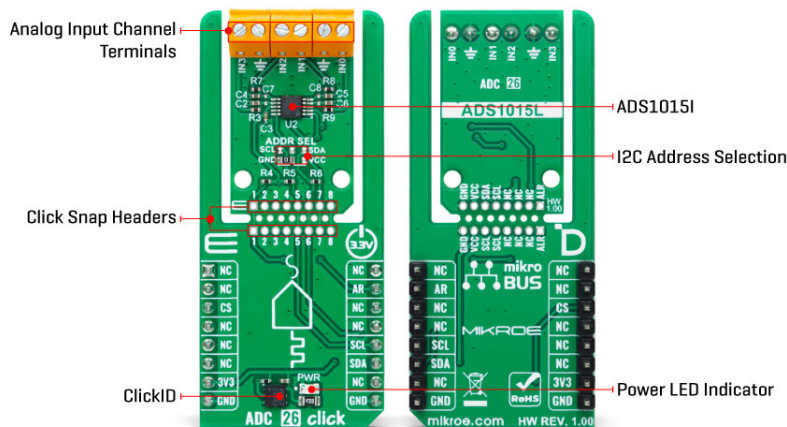

The ADC core of the ADS1015L measures differential signals brought to its analog input channels (IN0-IN3), offering a flexible full-scale input voltage range from  $\pm 0.256V$  to  $\pm 6.144V$ . This broad range enables the ADS1015L to handle both large and small signals with high precision, making it ideal for general system monitoring tasks such as supply voltage tracking, current sensing, and temperature measurements. These features also cater to applications in wearables and personal electronics.

The IC's architecture comprises a differential switched-capacitor  $\Delta\Sigma$  modulator followed by a digital filter, ensuring excellent attenuation of common-mode signals and high immunity to noise. The input signal is compared against the internal voltage reference, while the modulator generates a high-speed bitstream. This stream is processed by the digital filter, which produces a digital output code proportional to the measured voltage.

The ADS1015L supports two operational modes designed to optimize power consumption and performance based on application requirements. In single-shot mode, the ADC executes a single measurement upon request, stores the result in an internal register, and then enters a power-down state, making it particularly effective for systems that require periodic measurements or experience extended idle periods between conversions. In continuous-conversion mode, the ADC seamlessly initiates a new measurement as soon as the previous one is completed, maintaining a conversion rate consistent with the configured data rate. This mode is well-suited for real-time monitoring applications, as the data register consistently contains the most recent measurement.

This Click board™ is designed in a unique format supporting the newly introduced MIKROE feature called "Click Snap." Unlike the standardized version of Click boards, this feature allows the main IC area to become movable by breaking the PCB, opening up many new possibilities for implementation. Thanks to the Snap feature, the ADS1015L can operate autonomously by accessing its signals directly on the pins marked 1-8. Additionally, the Snap part includes a specified and fixed screw hole position, enabling users to secure the Snap board in their desired location.

ADC 26 Click uses an I2C interface with clock speeds of up to 400kHz, ensuring fast and efficient communication with the host MCU. The I2C address can be easily configured via onboard ADDR SEL jumpers positioned in the Snap part of the board, allowing multiple devices to coexist on the same bus. Additionally, the board features an alert interrupt (AR) pin triggered whenever conversion data exceeds the limit set in the appropriate upper/lower threshold register, or it can be used as a conversion-ready pin.

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.  
ISO 14001: 2015 certification of environmental management system.  
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

This Click board™ can be operated only with a 3.3V logic voltage level. The board must perform appropriate logic voltage level conversion before using MCUs with different logic levels. It also comes equipped with a library containing functions and example code that can be used as a reference for further development.

## Click Snap

**Click Snap** is an innovative feature of our standardized Click add-on boards, introducing a new level of flexibility and ease of use. This feature allows for easy detachment of the main sensor area by simply snapping the PCB along designated lines, enabling various implementation possibilities. For detailed information about Click Snap, please visit the [official page](#) dedicated to this feature.

## Specifications

|                  |                                                                                                                                                                             |
|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Type             | ADC                                                                                                                                                                         |
| Applications     | Ideal for system monitoring such as supply voltage tracking, current sensing, temperature measurements, wearables, and personal electronics                                 |
| On-board modules | ADS1015L - delta-sigma ( $\Delta\Sigma$ ) 12-bit I2C-compatible analog-to-digital converter from Texas Instruments                                                          |
| Key Features     | High resolution, up to 3300SPS data rate, flexible full-scale input range, conversion modes for optimized performance, I2C interface, alert interrupt, Click Snap, and more |
| Interface        | I2C                                                                                                                                                                         |
| Feature          | Click Snap, ClickID                                                                                                                                                         |
| Compatibility    | mikroBUS™                                                                                                                                                                   |
| Click board size | L (57.15 x 25.4 mm)                                                                                                                                                         |
| Input Voltage    | 3.3V                                                                                                                                                                        |

## Pinout diagram

This table shows how the pinout on ADC 26 Click corresponds to the pinout on the mikroBUS™ socket (the latter shown in the two middle columns).

| Notes        | Pin         |  mikroBUS |      |     |    | Pin        | Notes                                |
|--------------|-------------|----------------------------------------------------------------------------------------------|------|-----|----|------------|--------------------------------------|
|              | NC          | 1                                                                                            | AN   | PWM | 16 | NC         |                                      |
|              | NC          | 2                                                                                            | RST  | INT | 15 | <b>AR</b>  | Comparator Output / Conversion Ready |
| ID COMM      | <b>CS</b>   | 3                                                                                            | CS   | RX  | 14 | NC         |                                      |
|              | NC          | 4                                                                                            | SCK  | TX  | 13 | NC         |                                      |
|              | NC          | 5                                                                                            | MISO | SCL | 12 | <b>SCL</b> | I2C Clock                            |
|              | NC          | 6                                                                                            | MOSI | SDA | 11 | <b>SDA</b> | I2C Data                             |
| Power Supply | <b>3.3V</b> | 7                                                                                            | 3.3V | 5V  | 10 | NC         |                                      |

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.  
ISO 14001: 2015 certification of environmental management system.  
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

|        |            |   |     |     |   |            |        |
|--------|------------|---|-----|-----|---|------------|--------|
| Ground | <b>GND</b> | 8 | GND | GND | 9 | <b>GND</b> | Ground |
|--------|------------|---|-----|-----|---|------------|--------|

## Onboard settings and indicators

| Label   | Name     | Default    | Description                                                                                                                                                      |
|---------|----------|------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| LD1     | PWR      | -          | Power LED Indicator                                                                                                                                              |
| JP1-JP2 | ADDR SEL | Lower Left | I2C Address Selection<br>GND/SCL/SDA/VCC:<br>Lower Left Position<br>GND, Upper Left<br>Position SCL, Upper<br>Right Position<br>SDA, Lower Right<br>Position VCC |

## ADC 26 Click electrical specifications

| Description                    | Min    | Typ | Max    | Unit |
|--------------------------------|--------|-----|--------|------|
| Supply Voltage                 | -      | 3.3 | -      | V    |
| Full-Scale Input Voltage Range | ±0.256 | -   | ±6.144 | V    |
| Resolution                     | 12     | -   | -      | bits |
| Data Rate                      | -      | -   | 3300   | SPS  |

## Software Support

We provide a library for the ADC 26 Click as well as a demo application (example), developed using MIKROE [compilers](#). The demo can run on all the main MIKROE [development boards](#).

Package can be downloaded/installed directly from NECTO Studio Package Manager (recommended), downloaded from our [LibStock™](#) or found on [MIKROE github account](#).

## Library Description

This library contains API for ADC 26 Click driver.

### Key functions

- `adc26_start_conversion` This function starts a single-shot conversion for the selected MUX channel and gain level (full-scale range).
- `adc26_get_alert_pin` This function returns the ALERT (data ready) pin logic state.
- `adc26_read_voltage` This function reads the RAW ADC measurement and converts it to a voltage level.

## Example Description

This example demonstrates the use of ADC 26 Click by reading and displaying the voltage levels from IN0-IN1 differential and IN2-IN3 single-ended analog input channels.

The full application code, and ready to use projects can be installed directly from NECTO Studio Package Manager (recommended), downloaded from our [LibStock™](#) or found on [MIKROE github](#)

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.  
ISO 14001: 2015 certification of environmental management system.  
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

[account](#).

Other MIKROE Libraries used in the example:

- MikroSDK.Board
- MikroSDK.Log
- Click.ADC26

## Additional notes and informations

Depending on the development board you are using, you may need [USB UART click](#), [USB UART 2 Click](#) or [RS232 Click](#) to connect to your PC, for development systems with no UART to USB interface available on the board. UART terminal is available in all MIKROE [compilers](#).

## mikroSDK

This Click board™ is supported with [mikroSDK](#) - MIKROE Software Development Kit. To ensure proper operation of mikroSDK compliant Click board™ demo applications, mikroSDK should be downloaded from the [LibStock](#) and installed for the compiler you are using.

For more information about mikroSDK, visit the [official page](#).

## Resources

[mikroBUS™](#)

[mikroSDK](#)

[Click board™ Catalog](#)

[Click boards™](#)

[ClickID](#)

## Downloads

[ADC 26 click example on Libstock](#)

[ADC 26 click 2D and 3D files v100](#)

[ADS1015L datasheet](#)

[ADC 26 click schematic v100](#)

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.  
 ISO 14001: 2015 certification of environmental management system.  
 OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).