


GSD

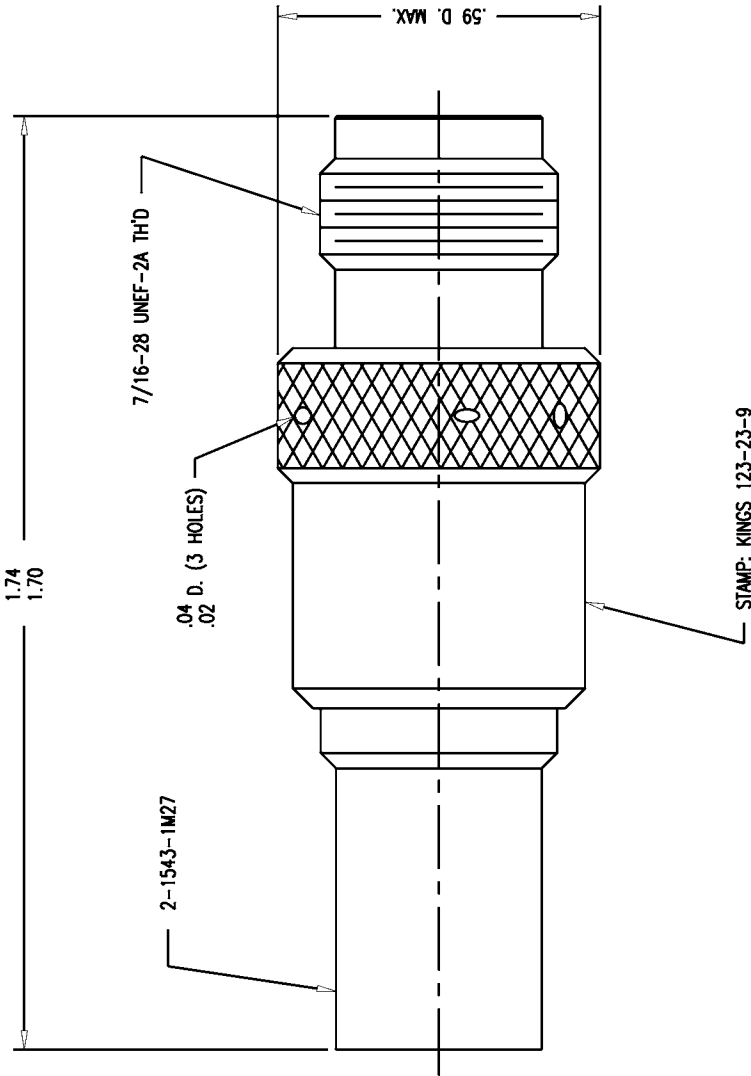

- NOTES:
1. FOR USE WITH BOEING S280W503-4 & ADAMS RUSSELL FC28Z CABLE.
 2. FOR CABLING INSTRUCTIONS SEE 3-546-2.
 3. FOR CRIMPING USE DIE KTH-2212.
 4. CENTER CONTACT (1-2288-4MA9) SUPPLIED UNASSEMBLED.
 5. INTERFACE PER MIL-STD-348, FIG. 313-2.
 6. MARK PACKAGE: KINGS 121-23-9
XXXX (DATE CODE)
 7. MATERIALS:
 - CENTER CONTACT-BER. COP., ASTM-B-196
 - K-GRIP SLEEVE-COMMERCIAL BRONZE, ASTM-B-135
 - INSULATOR-TEFLON, ASTM-D-4894
 - ALL OTHER METAL PARTS-BRASS, ASTM-B16
 8. FINISHES:
 - CENTER CONTACT-GOLD PLATE PER MIL-G-45204
 - ALL OTHER METAL PARTS-KINGS TARNISH RESISTANT FINISH (TR-5)
 9. ELECTRICAL CHARACTERISTICS:
 - NOMINAL IMPEDANCE-50 OHMS
 - FREQUENCY RANGE-DC TO 11 GHZ
 - WORKING VOLTAGE-500 VRMS

GSD

REVISIONS	
ISSUE	CHANGES
1	ADD LOCK WIRE HOLES KH 04/26/94
2	ER 35796 KH 09/26/94
KAM3581	
SCALE 4:1	
APPROX SURFACE AREA	
USED ON	
REF: BOEING	
JACK, PANEL, TNC	
DRAWN KH	DATE 03/15/94
DESIGN JT	DATE 03/16/94
APPR.	DATE
KINGS ELECTRONICS CO. INC. TUCKAHOE, NEW YORK 10707	
123-23-9	

123-23-9