

# Mini-Com® TX5e™ Shielded Jack Modules

**PANDUIT**

SPECIFICATION SHEET

## specifications

Category 5e/Class D, 8-position, shielded jack module shall terminate 4-pair, 22 – 26 AWG, 100 ohm shielded twisted pair cable and shall not require use of a punchdown tool. Shielded jack modules shall use a forward motion termination method to optimize performance by maintaining cable pair geometry while eliminating conductor untwist. The termination cap shall be color-coded red to designate Category 5e performance and shall include a universal label coded for T568A and T568B wiring schemes.



## technical information

|   |  |
|---|--|
| <b>Category 5e/Class D performance:</b> | Exceeds ANSI/TIA-568-C.2 Category 5e and ISO 11801 Class D channel requirements at swept frequencies up to 100 MHz   |
|   | Meets ANSI/TIA-568-C.2 and ISO 11801 Category 5e component requirements at swept frequencies up to 100 MHz   |
| <b>FCC compliance:</b>                  | Complies with ANSI/TIA-1096A (formerly FCC Part 68); contacts plated with 50 microinches of gold   |
| <b>IEC compliance:</b>                  | Meets IEC 60603-7  |
| <b>PoE compliance:</b>                  | Supports IEEE 802.3af/802.3at and proposed 802.3bt type 3 and type 4 PoE applications  |
| <b>c(UL)us Listed:</b>                  | UL 1863 (Use as communications circuit accessory), CSA standard C22.2 UL 2043 (Suitable for use in air-handling spaces)  |
| <b>RoHS compliance:</b>                 | Compliant  |
| <b>Conductor termination range:</b>     | Wire cap compatible with 22 – 26 AWG solid or stranded cable with conductor insulation diameters of 0.060 in. max and overall cable O.D. 0.200 in. to 0.330 in |

## key features and benefits

|  |  |
|--|--|
| <b>100% performance tested</b>               | Confidence that each jack module will deliver the critical electrical performance requirements   |
| <b>Utilizes enhanced Giga-TX™ Technology</b> | Optimizes performance by eliminating conductor untwist and reduces installation time and expense   |
| <b>Improved termination cap</b>              | Conductor retention slots simplify jack module termination   |
| <b>Integral shield</b>                       | Provides a 360° conductive path to ground shielded jack module with no additional assembly required; shield provides seamless bonding of the jack module with Mini-Com® All Metal Modular Patch Panels   |
| <b>Modular</b>                               | Shielded jack modules snap in and out of all Mini-Com® Faceplates, All Metal Modular Patch Panels, and Surface Mount Boxes for easy moves, adds, and changes   |
| <b>True strain relief</b>                    | Controls cable bend radius for long term installed performance   |
| <b>Individually serialized</b>               | Marked with quality control number for future traceability   |
| <b>RJ45 interface</b>                        | Industry standard interface provides a quick and easy plug and play connection to RJ45 patch cords; backwards compatible   |
| <b>Identification</b>                        | Can be clearly identified with optional labels and icons for port identification   |
| <b>Keyed version available</b>               | Color-specific keys with positive and negative keying features mechanically and visually distinguish connections to prevent unintentional mating with unlike keyed or non-keyed modular plugs, offering network design flexibility, versatility, accommodating discrete networks for enhanced security |
| <b>Termination tools (optional)</b>          | EGJT termination tool ensures conductors are fully terminated by utilizing a smooth forward motion without impact on critical internal components for maximum reliability; TGJT termination tool ideal for high volume installations   |
| <b>Block out device (optional)</b>           | Provides a simple and secure method to control access to data ports while not in use   |

## applications

Mini-Com® TX5e™ Shielded Jack Modules are a component of the TX5500™ Shielded Copper Cabling System. This end-to-end system provides Gigabit Ethernet performance with usable bandwidth beyond 100 MHz. With certified performance to the ANSI/TIA-568-C.2 Category 5e and ISO 11801 Class D Edition 2.1 standards,

this system will support the following applications:

- Ethernet 10BASE-T, 100BASE-T (Fast Ethernet), 1000BASE-T (Gigabit Ethernet)
- 155 Mb/s ATM, 622 Mb/s ATM
- Token Ring 4/16
- Voice/data systems
- Voice over Internet Protocol (VoIP)

## TX5500™ Shielded Copper Cabling System

### Mini-Com® TX5e™ Shielded Jack Modules

**Jack module:** CJS5E88TG\*Y  
**Keyed jack module:** CJSK5E88TG\*\*

### TX5500™ Shielded U/FTP Copper Cable

**LSZH:** PFL5504\*\*\*-KG  
**PVC:** PFC5504\*\*\*-KG

### TX5e™ Shielded Patch Cords

**Meter lengths:** STPCH^MBBL

### Mini-Com® Angled All Metal Modular Patch Panels

**24-port, 1 RU:** CPA24BLY  
**48-port, 2 RU:** CPA48BLY  
**72-port, 2 RU:** CPA72BLY

### Mini-Com® Flat All Metal Modular Patch Panels

**24-port, 1 RU:** CP24BLY  
**48-port, 2 RU:** CP48BLY  
**72-port, 2 RU:** CP72BLY

### Tools and Accessories

**Jack module termination tool:** EGJT or TGJT  
**Wire snipping tool:** CWST  
**Wire stripping tool:** CJAST  
**Clear dust cap:** MDC-C  
**Block out device:** PSL-DCJB-^~  
**Phone icons:** CIPW-C+  
**Data icons:** CIDIW-C+

\*To designate color, add BU (Blue), RD (Red), YL (Yellow), GR (Green) or VL (Violet). For part number CJS5E88TG(Y) (no designation), the color is black.

\*\*To designate color, add suffix BL (Black), BU (Blue), RD (Red), YL (Yellow), GR (Green), or OR (Orange). Each color representing a different keyed configuration.

\*\*\*To designate color, add suffix BU (Blue) or WH (White). For additional cable colors, contact customer service.

^For lengths 1 to 10 meters (one meter increments) and 0.5, 1.5, 2.5, 10, 20, 25, 30, 35, 40 meters, change the length designation in the part number to the desired length. Cable color is International Gray. For boot colors other than BL (Black), substitute the BL suffix with BU (Blue), RD (Red), YL (Yellow), or GR (Green). For example, the part number for a 15-meter patch cord with blue boots is STPCH15MBBU.

^~To designate color other than Red, add suffix BL (Black), BU (Blue), YL (Yellow), GR (Green), OR (Orange), IW (Off White) or IG (International Gray) at the end of the part number. 10/package.

^+To designate color other than IW (Off White), replace IW with EI (Electric Ivory), IG (International Gray), BL (Black), BU (Blue), RD (Red), YL (Yellow), GR (Green), OR (Orange), or VL (Violet) in the part number. 100/package.

Contact customer service for bulk packaged and/or keyed jack modules and patch cords.

Panduit recommends installing shielded jack modules in Mini-Com® All Metal Modular Patch Panels. For grounding shielded jack modules not installed in a Mini-Com® All Metal Modular Patch Panel, use the shielded jack module grounding kit, part number CJSK-XY.


# Mini-Com® TX5e™ Shielded Jack Modules

## Test Results

| Mechanical Test         | Test Method | Measurement                       | Typical Test Results |
|-------------------------|-------------|-----------------------------------|----------------------|
| <b>Normal Force</b>     | —           | Load (grams)                      | > 100                |
| <b>Vibration</b>        | IEC 512-6d  | Circuit Resistance (mOhms)        | < 40                 |
| <b>Shock</b>            | IEC 512-6c  | Contact Disturbance (microsecond) | < 5                  |
| <b>Durability</b>       | IEC 512-9a  | Circuit Resistance (mOhms)        | < 40                 |
| <b>Mating/Un-Mating</b> | IEC 512-13b | Mating Force (N)                  | < 20                 |
|                         |             | Un-Mating Force (N)               | < 20                 |

| Electrical Test                     | Test Method | Measurement        | Typical Test Results |
|-------------------------------------|-------------|--------------------|----------------------|
| <b>Low Level Circuit Resistance</b> | IEC 512-2a  | Resistance (mOhms) | < 20                 |
| <b>Dielectric Withstand Voltage</b> | IEC 512-4a  | 1000 V, 1 minute   | Passed               |
| <b>Insulation Resistance</b>        | IEC 512-3a  | Resistance (MOhms) | > 500                |

| Environmental Test                 | Test Method | Measurement                | Typical Test Results |
|------------------------------------|-------------|----------------------------|----------------------|
| <b>Temperature Life</b>            | IEC 512-9b  | Circuit Resistance (mOhms) | < 40                 |
| <b>Humidity</b>                    | IEC 512-11c | Circuit Resistance (mOhms) | < 40                 |
| <b>Thermal Shock</b>               | IEC 512-11d | Circuit Resistance (mOhms) | < 40                 |
| <b>Climatic Sequence</b>           | IEC 512-11a | Circuit Resistance (mOhms) | < 40                 |
| <b>Flowing Mixed Gas Corrosion</b> | IEC 512-11g | Circuit Resistance (mOhms) | < 40                 |

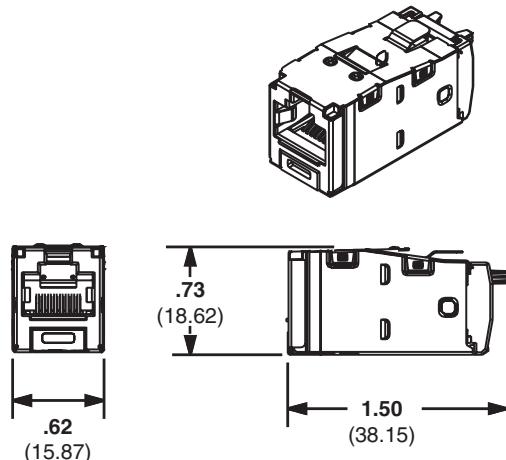

Dimensions are in inches. (Dimensions in parentheses are metric).

### WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA  
Markham, Ontario  
cs-cdn@panduit.com  
Phone: 800.777.3300

PANDUIT EUROPE LTD.  
London, UK  
cs-eMEA@panduit.com  
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.  
Republic of Singapore  
cs-ap@panduit.com  
Phone: 65.6305.7575

PANDUIT JAPAN  
Tokyo, Japan  
cs-japan@panduit.com  
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA  
Guadalajara, Mexico  
cs-la@panduit.com  
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.  
Victoria, Australia  
cs-aus@panduit.com  
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to [www.panduit.com/warranty](http://www.panduit.com/warranty)

### For more information

**Visit us at [www.panduit.com](http://www.panduit.com)**

Contact Customer Service by email: [cs@panduit.com](mailto:cs@panduit.com)  
or by phone: 800.777.3300 and reference COSP36

©2015 Panduit Corp.  
ALL RIGHTS RESERVED.  
COSP36--WW-ENG  
02/2016

**PANDUIT®**