






Data Sheet | Item Number: 831-3625


THT male header; 1.0 x 1.2 mm solder pin; angled; 100% protected against mismating;
Pin spacing 7.62 mm; 5-pole; light gray

<https://www.wago.com/831-3625>

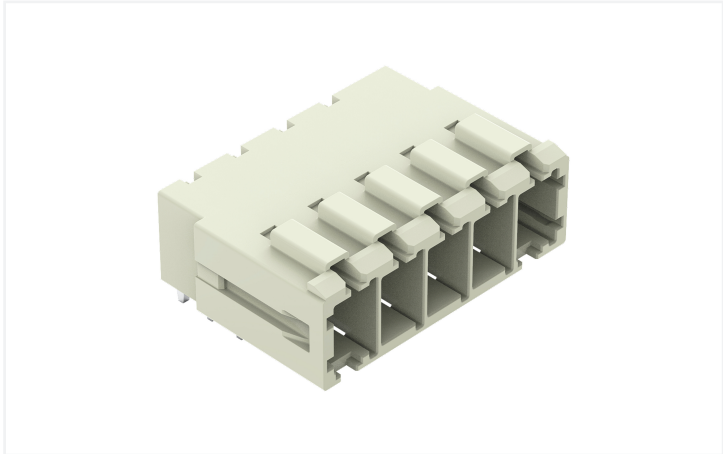

Color: ■ light gray

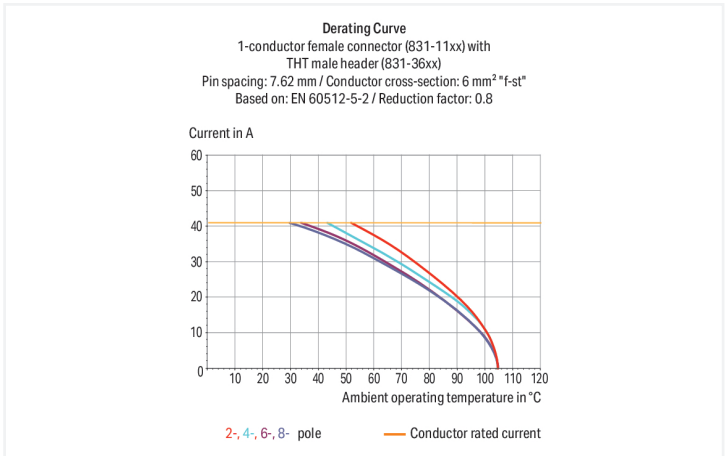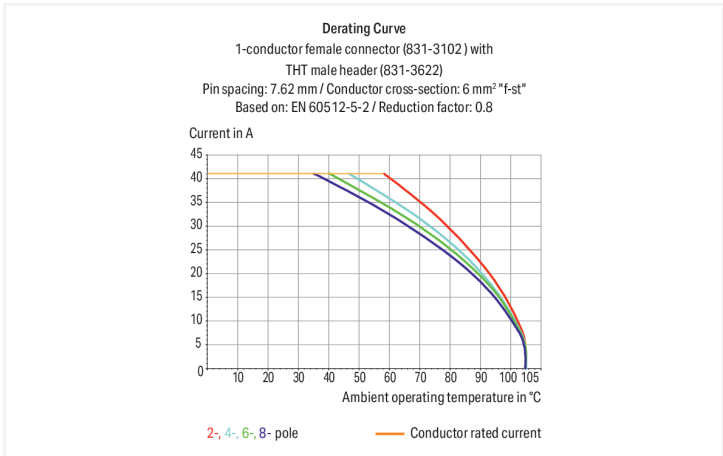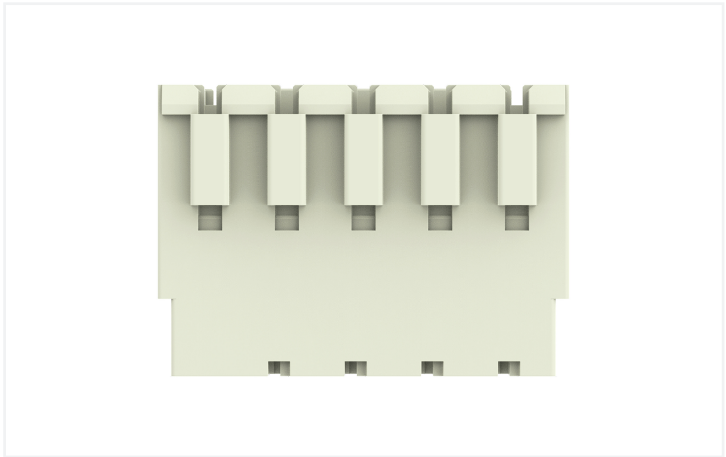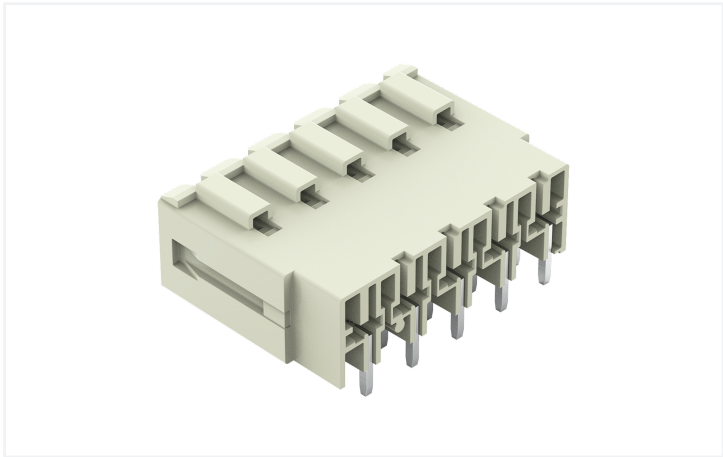

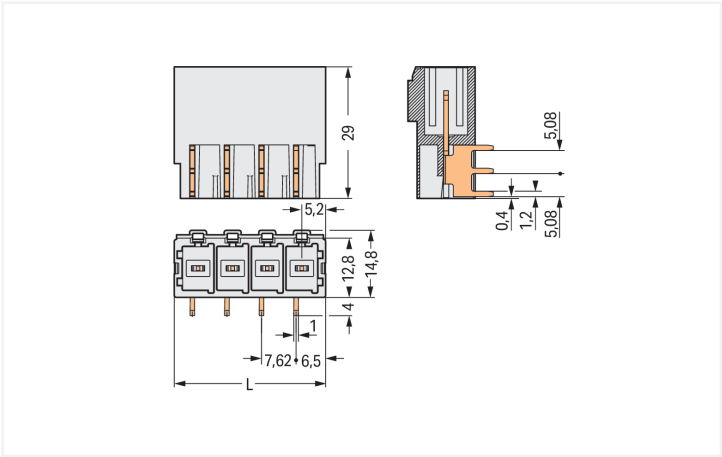

Dimensions in mm
L = (pole no. – 1) x pin spacing + 10.5 mm

Male connector, 831 Series, light gray

Seamless electrical installations are guaranteed with this male connector (item number 831-3625). Dimensions: (40.98 x 18.8 x 29) mm (width x height x depth).

The contact surface is coated with tin. The pcb connector is designed for THT soldering.

Notes	
Safety Information	The MCS – MULTI CONNECTION SYSTEM includes connectors without breaking capacity in accordance with DIN EN 61984. When used as intended, these connectors must not be connected/disconnected when live or under load. When used as intended, these connectors must not be connected/disconnected when live or under load. The circuit design should ensure header pins, which can be touched, are not live when unmated.
Variants:	Other pole numbers Protection against PCB mounting errors Other versions (or variants) can be requested from WAGO Sales or configured at https://configurator.wago.com/ .

Electrical data				
Ratings per		IEC/EN 60664-1		
Overvoltage category		III	III	II
Pollution degree		3	2	2
Nominal voltage		500 V	630 V	1000 V
Rated impulse withstand voltage		6 kV	6 kV	6 kV
Rated current		41 A	41 A	41 A
Approvals per		UL 1059		
Use group		B	C	D
Rated voltage		-	300 V	600 V
Rated current		-	42 A	5 A
Approvals per		CSA		
Use group		B	C	D
Rated voltage		-	300 V	600 V
Rated current		-	41 A	5 A

Connection Data				
Total number of potentials	5	Connection 1		
Number of connection types	1	Pole number	5	
Number of levels	1			

Physical data		
Pin spacing		7.62 mm / 0.3 inches
Width		40.98 mm / 1.613 inches
Height		18.8 mm / 0.74 inches
Height from the surface		14.8 mm / 0.583 inches
Depth		29 mm / 1.142 inches
Solder pin length		4 mm
Solder pin dimensions		1 x 1.2 mm
Drilled hole diameter		1.7 ^(+0.1) mm

Mechanical data		
Variable coding		Yes
Anti-rotation protection		Yes

Plug-in connection		
Contact type (pluggable connector)		Male connector/plug
Connector (connection type)		for PCB
Mismating protection		Yes
Mating direction to the PCB		0 °

PCB contact		
PCB contact		THT
Solder pin arrangement		over the entire male connector (in-line)
Number of solder pins per potential		3

Material data		
Note (material data)		Information on material specifications can be found here
Color		light gray
Material group		I
Insulation material (main housing)		Polyamide (PA66)
Flammability class per UL94		V0
Contact material		Electrolytic copper (E _{Cu})
Contact Plating		Tin
Fire load		0.202 MJ
Weight		13.1 g

Environmental requirements			
Limit temperature range	-60 ... +105 °C	Environmental Testing	
Processing temperature	-35 ... +60 °C	Test specification: Railway applications – Rolling stock – Electronic equipment	DIN EN 50155 (VDE 0115-200):2022-06
		Test procedure: Railway applications – Rolling stock equipment – Vibration and shock tests	DIN EN 61373 (VDE 0115-0106):2011-04
		Spectrum/Mounting location	Service life test, Category 1, Class A/B
		Functional test with noise-like oscillations	Test passed according to Section 8 of the standard
		Frequency	f ₁ = 5 Hz to f ₂ = 150 Hz
		Acceleration	0.101g (highest test level used for all axes)
		Test duration per axis	10 min.
		Test directions	X, Y and Z axes



Environmental Testing	
Monitoring of contact faults and interruptions	Passed
Voltage drop measurement before and after each axis	Passed
Simulated service life test through increased levels of noise-like oscillations	Test passed according to Section 9 of the standard
Frequency	f ₁ = 5 Hz to f ₂ = 150 Hz
Acceleration	0.572g (highest test level used for all axes)
Test duration per axis	5 h
Test directions	X, Y and Z axes
Extended testing: Monitoring of contact faults and interruptions	Passed
Extended testing: Voltage drop measurement before and after each axis	Passed
Shock test	Test passed according to Section 10 of the standard
Shock pulse form	Half sine
Acceleration	5g (highest test level used for all axes)
Shock duration	30 ms
Number of shocks (per axis)	3 pos. und 3 neg.
Test directions	X, Y and Z axes
Extended testing: Monitoring of contact faults and interruptions	Passed
Extended testing: Voltage drop measurement before and after each axis	Passed
Vibration and shock stress for rolling stock equipment	Passed

Commercial data	
Product Group	3 (Multi Conn. System)
PU (SPU)	24 pcs
Packaging type	Box
Country of origin	PL
GTIN	4045454002206
Customs tariff number	85366930000

Product Classification	
UNSPSC	39121409
eCl@ss 10.0	27-44-04-02
eCl@ss 9.0	27-44-04-02
ETIM 9.0	EC002637
ETIM 10.0	EC002637
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption



Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
CB DEKRA Certification B.V.	IEC 61984	NL-124478
CSA DEKRA Certification B.V.	C22.2	1466354
KEMA/KEUR DEKRA Certification B.V.	EN 61984	71-129589 REV.1
UR Underwriters Laboratories Inc.	UL 1059	UL-US-2426356-0

Declarations of conformity and manufacturer's declarations



Approval	Standard	Certificate Name
Railway WAGO GmbH & Co. KG	-	Railway Ready

Approvals for marine applications



Approval	Standard	Certificate Name
LR Lloyds Register	IEC 61984	96/20035 (E5)

Downloads

Environmental Product Compliance

Compliance Search
Environmental Product Compliance 831-3625 

Documentation

Additional Information
Technical Section 03.04.2019 pdf 2027.26 KB 

CAD/CAE-Data

CAD data
2D/3D Models 831-3625 

CAE data
EPLAN Data Portal 831-3625 
ZUKEN Portal 831-3625 



PCB Design	
Symbol and Footprint via SamacSys 831-3625	
Symbol and Footprint via Ultra Librarian 831-3625	

1 Compatible Products

1.1 System counterpart

1.1.1 Female connector/socket

 Item No.: 831-1105 1-conductor female connector; lever; Push-in CAGE CLAMP®; 10 mm²; Pin spacing 7.62 mm; 5-pole; 100% protected against mis-mating; 10,00 mm²; light gray	 Item No.: 831-1105/000-004 1-conductor female connector; lever; Push-in CAGE CLAMP®; 10 mm²; Pin spacing 7.62 mm; 5-pole; 100% protected against mis-mating; black	 Item No.: 831-1105/320-000 1-conductor female connector; lever; Push-in CAGE CLAMP®; 10 mm²; Pin spacing 7.62 mm; 5-pole; 100% protected against mis-mating; Centered locking levers; 10,00 mm²; light gray	 Item No.: 831-1105/322-000 1-conductor female connector; lever; Push-in CAGE CLAMP®; 10 mm²; Pin spacing 7.62 mm; 5-pole; 100% protected against mis-mating; Centered locking levers; 10,00 mm²; light gray
 Item No.: 831-1105/322-004 1-conductor female connector; lever; Push-in CAGE CLAMP®; 10 mm²; Pin spacing 7.62 mm; 5-pole; 100% protected against mis-mating; Centered locking levers; black	 Item No.: 831-1105/037-000 1-conductor female connector; lever; Push-in CAGE CLAMP®; 10 mm²; Pin spacing 7.62 mm; 5-pole; 100% protected against mis-mating; Lateral locking levers; 10,00 mm²; light gray	 Item No.: 831-1105/038-000 1-conductor female connector; lever; Push-in CAGE CLAMP®; 10 mm²; Pin spacing 7.62 mm; 5-pole; 100% protected against mis-mating; Lateral locking levers; 10,00 mm²; light gray	 Item No.: 831-3105 1-conductor female connector; Push-in CAGE CLAMP®; 10 mm²; Pin spacing 7.62 mm; 5-pole; 100% protected against mis-mating; 10,00 mm²; light gray
 Item No.: 831-3105/000-9035 1-conductor female connector; Push-in CAGE CLAMP®; 10 mm²; Pin spacing 7.62 mm; 5-pole; 100% protected against mis-mating; direct marking; 10,00 mm²; light gray	 Item No.: 831-3105/000-9037 1-conductor female connector; Push-in CAGE CLAMP®; 10 mm²; Pin spacing 7.62 mm; 5-pole; 100% protected against mis-mating; direct marking; 10,00 mm²; light gray	 Item No.: 831-3105/135-000 1-conductor female connector; Push-in CAGE CLAMP®; 10 mm²; Pin spacing 7.62 mm; 5-pole; 100% protected against mis-mating; Gripping plate; 10,00 mm²; light gray	 Item No.: 831-3105/037-000 1-conductor female connector; Push-in CAGE CLAMP®; 10 mm²; Pin spacing 7.62 mm; 5-pole; 100% protected against mis-mating; Lateral locking levers; 10,00 mm²; light gray
 Item No.: 831-3105/037-9037 1-conductor female connector; Push-in CAGE CLAMP®; 10 mm²; Pin spacing 7.62 mm; 5-pole; 100% protected against mis-mating; Lateral locking levers; direct marking; 10,00 mm²; light gray	 Item No.: 831-3525 THT female header; angled; Pin spacing 7.62 mm; 5-pole; 100% protected against mismating; 1.0 x 1.2 mm solder pin; light gray	 Item No.: 831-3505 THT female header; straight; Pin spacing 7.62 mm; 5-pole; 100% protected against mismating; 1.0 x 1.2 mm solder pin; light gray	

1.2 Optional Accessories

1.2.1 Coding


1.2.1.1 Coding




Item No.: 831-500 Coding pin carrier with six coding pins; orange

Installation Notes


Coding



Break or cut off coding pin from female connector.



Insert coding pin into male header (break first) until it engages.



Coding a THT male header by inserting a coding pin.