

Obsolete

•M•C•C•

Micro Commercial Components

Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

PF501L thru PF505L

Features

- Low Cost
- Low Leakage
- Low Forward Voltage Drop
- High Current Capability
- For Automotive Applications

Maximum Ratings

- Operating Temperature: -55°C to +150°C
 - Storage Temperature: -55°C to +150°C
 - Standard polarity : Case is Cathode ; Lead is Anode
- Note for positive terminal part number is as shown PF501
For negative terminal add an "N" to the suffix of the part number . i.e. PF501NL

MCC Catalog Number	Device Marking	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
PF501L	---	50V	35V	50V
PF502L	---	100V	70V	100V
PF503L	---	200V	140V	200V
PF504L	---	400V	280V	400V
PF505L	---	600V	420V	600V


Electrical Characteristics @ 25°C Unless Otherwise Specified

Average Forward Current	$I_{F(AV)}$	50A	$T_A = 125^\circ\text{C}$
Peak Forward Surge Current	I_{FSM}	500A	8.3ms, half sine
Maximum Instantaneous Forward Voltage	V_F	1.0V 1.1V	$I_{FM} = 50A; T_A = 25^\circ\text{C}$ $I_{FM} = 100A; T_A = 25^\circ\text{C}$
Maximum DC Reverse Current At Rated DC Blocking Voltage	I_R	5 μA 500 μA	$T_J = 25^\circ\text{C}$ $T_J = 100^\circ\text{C}$
Maximum thermal Resistance, junction to case	R_{thJC}	12°C/W	

*Pulse test: Pulse width 300 μsec , Duty cycle 2%

50Amp Standard Recovery Rectifier 50 to 800 Volts

PRESSFIT

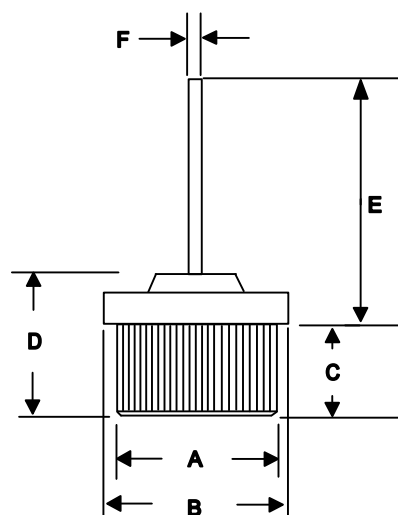

DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	0.502	0.505	12.75	12.82	
B	0.621	0.629	15.77	15.97	
C	0.224	0.232	5.70	5.90	
D	0.378	0.390	9.60	9.90	
E	0.600	0.700	15.24	17.78	
F	0.097	0.103	2.43	2.62	

www.mccsemi.com

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

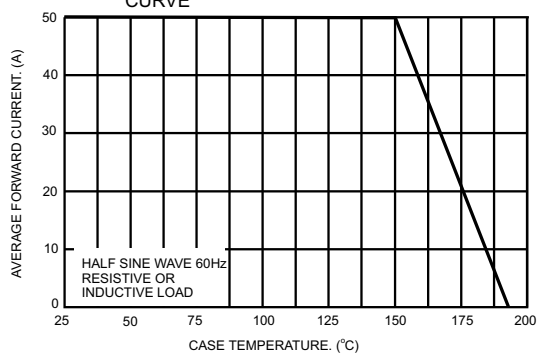


FIG.2- MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

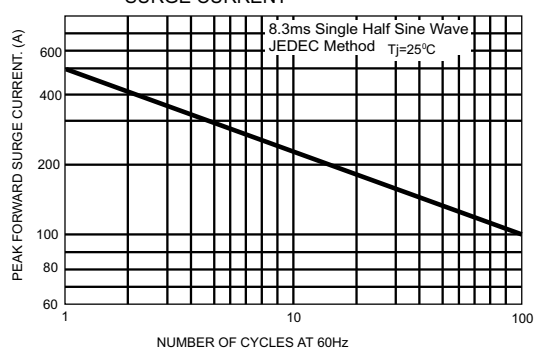


FIG.3- TYPICAL FORWARD CHARACTERISTICS


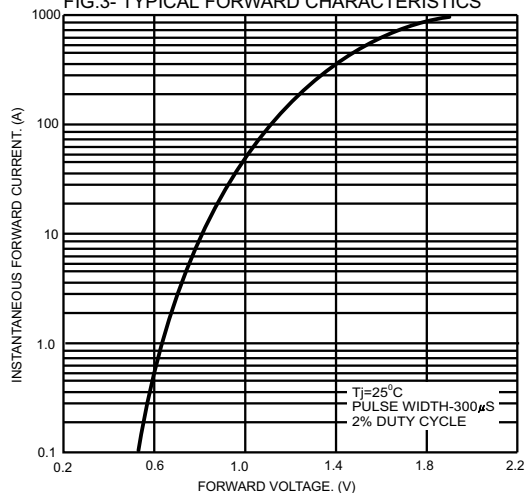


FIG.4- TYPICAL REVERSE CHARACTERISTICS

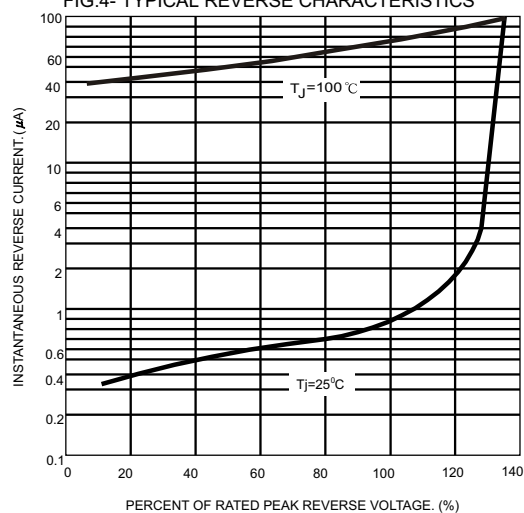

Ordering Information

Device	Packing
(Part Number)-BP	Bulk;100pcs/Box

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

APPLICATIONS DISCLAIMER

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.