

Honeywell Sensing and Control

Search



4TL11-50K

(Home : Products : Switches » MICRO SWITCH™ Toggle Switches » TL)

[contacts](#)


narrow your search

Products

- Controls Monitoring and Lighting (286)
- Machine Safety (1727)
- Sensors (6158)
- Switches (9781)
- Wireless (45)

Technology

- Control and Instrumentation (890)
- Electromechanical (9303)
- Magnetic (538)
- Platinum thin film (56)
- Thick Film (1372)
- More...



TL Series Toggle Switch, 4 pole, 3 position, Screw terminal, Locking Lever

Actual product appearance may vary.

[Sales & Service](#)[Distributor Inventory](#)

Customer Service
Technical Support
Global Sales & Service
View Site Demo
Site Comments?

[meet dr. larry](#)

VIDEO - Dr. Larry Goldstein explains our newest and best technologies.

Meet Dr. Larry

[my links](#)

[Login to iCOM](#)
[Login to Rep/AD Portal](#)
[Login to Digital University](#)

[News Center](#)

HONEYWELL INTRODUCES TRUSTABILITY® NSC SERIES, UNCOMPENSATED / UNAMPLIFIED BOARD MOUNT PRESSURE SENSORS

HONEYWELL EXPANDS ITS LIMITLESS™ PLATFORM WITH THE LAUNCH OF ITS GLOBALLY AVAILABLE INDUSTRIAL WIRELESS RECEIVER

HONEYWELL EXTENDS ITS TRUSTABILITY® PRESSURE SENSOR PRODUCT LINE WITH A SINGLE SIDE LIQUID MEDIA OPTION

[MICRO SWITCH Anniversary site](#)

new products

New Wireless Products

Go farther. Work smarter. Explore new possibilities. Just by cutting the cord and making the switch.



Wireless Web Site
WGLA and WPMM
XYR6000™

[find out more](#)

white papers

Wireless Switches Offer Unlimited Benefit
Basic Switches Are Not Created Equal
Applying Precision Switches
Sensors for Medical Devices
New Ways to Measure Torque
Choosing Safety Switches
Specifying Hour Meters


Need help?

[Click here to contact us](#)

Overview Specs Documentation Application Notes

Product Specifications

Circuitry/Operating action

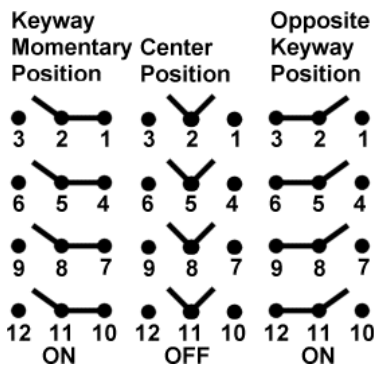

Product Type

MICRO SWITCH™ Toggle Switch

Lever Lock



Locked in center and extreme position (Opposite keyway)

Ampere/Voltage Range (Resistive Load)

0.75 A at 115 Vdc, 0.5 A at 250 Vdc, 0.5 A to 10 A at 0.5 Vac to 277 Vac, 0.5 A to 18 A at 0.5 Vdc to 28 Vdc

Circuitry

4PDT

Action

3 position

Mounting

Bushing 15/32 in

Termination

Screw

Lever Type

Locking

Comment

Silver cadmium oxide contacts

Availability

Global

UNSPSC Code

30211908

UNSPSC Commodity

30211908 Toggle switches

Series Name

TL