

© 2020 TE Connectivity. All Rights Reserved.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	RELEASED PER ECO 20-004776	4-2-20	CT	FB

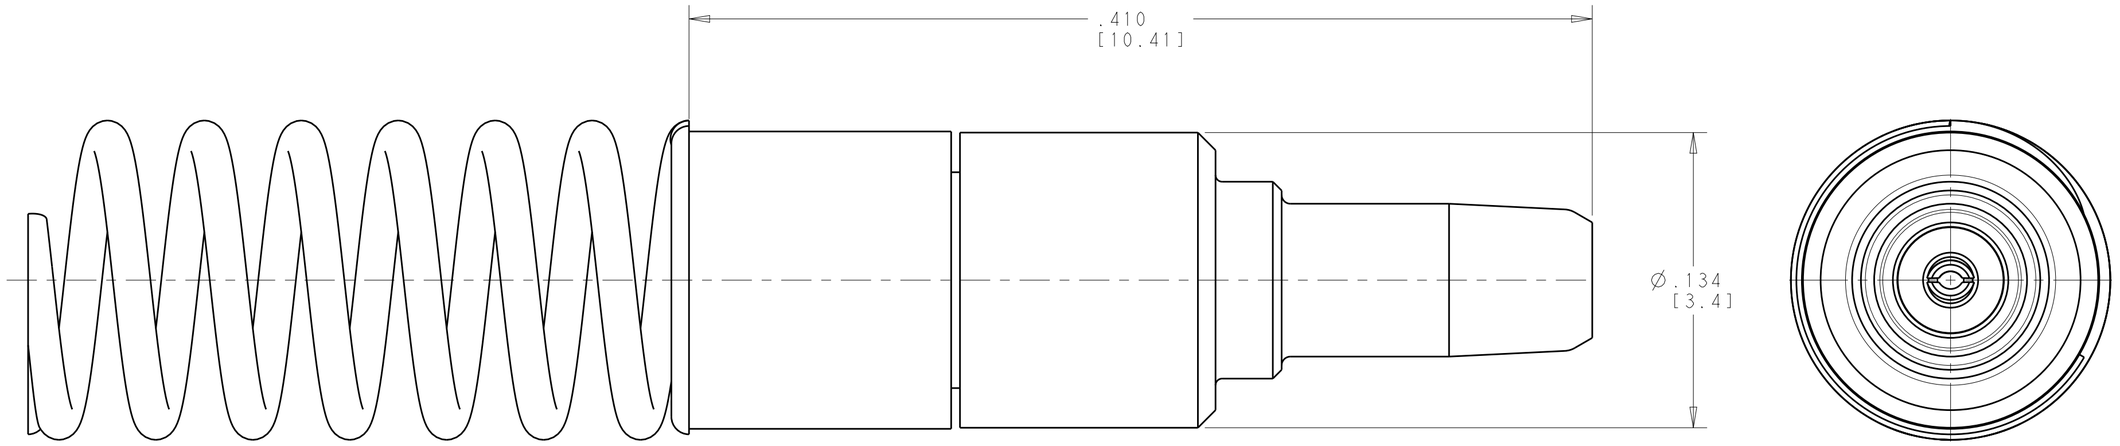

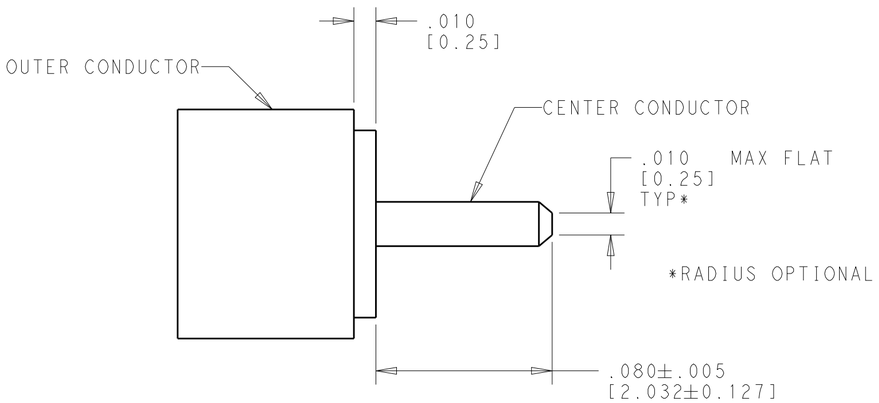

1. MATERIAL:
   BODY AND CENTER CONTACT: COPPER ALLOY
   INSULATOR: TEFLON (PTFE)
   SPRING: STAINLESS STEEL

2. FINISH: FRONT BODY AND CENTER CONTACT: 50-90 µIN GOLD PLATE OVER NICKEL
   REAR BODY: 3-15 µIN GOLD PLATE OVER NICKEL

3. SPRING IS SHIPPED LOOSE FROM CONTACT ASSEMBLY

2332772-1

PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES[mm]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±-
3 PLC ±.005[0.13]
4 PLC ±-
ANGLES ±

MATERIAL 1

FINISH 2

DWN K. MILLER 02NOV2018
CHK F. BLASICK 20AUG2019
APVD -
PRODUCT SPEC 108-163006
APPLICATION SPEC 408-163016
WEIGHT -

TE Connectivity

NAME NanoRF PIN CONTACT ASSEMBLY
.086 CABLE VERSION
-

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-2332772	

CUSTOMER DRAWING | SCALE 20:1 | SHEET 1 OF 1 | REV A

Downloaded from Arrow.com.