




Home> Products > Thermostats > 2455RM> Product Page

2455RM 86230002

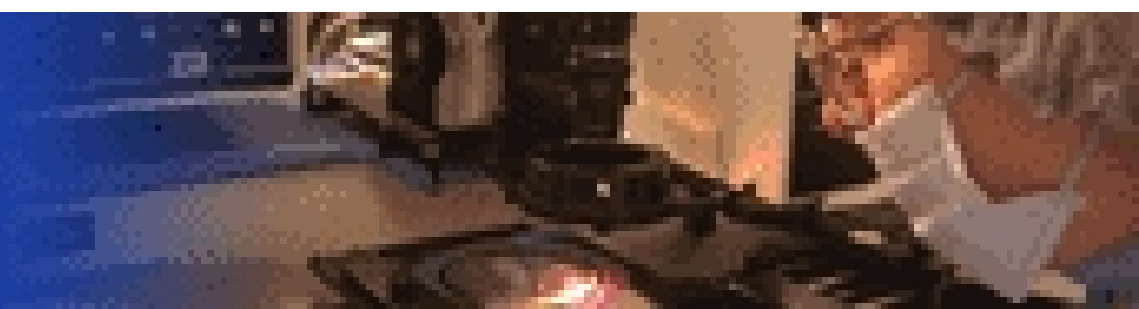

Actual product appearance may vary.

2455RM Series Phenolic Manual Reset Thermostats

Features

- Cost effective
- Rivet sleeve construction
- Manually resettable

Potential Applications

- HVAC
- Power supplies
- Office automation

Description

The 2455RM Series consists of a temperaturesensitive bimetal disc, electrically isolated from the switch, which actuates the normally closed contacts. The contacts open when the surface or ambient temperatures increase to the operating snap point of the calibrated disc. The circuit will stay open above room ambient temperature until the manual reset button is pressed. Response to temperature changes is extremely rapid due to the inherently low mass of the disc and the small size of the product.

Supporting Documentation

None Available

Product Specifications	
Functional Properties	Open on rise
Reset Type	Manual
Amperage	15 A/10 A
Voltage	120 Vac/250 Vac
Operating Temperature Range	0 °C to 150 °C [32 °F to 302 °F]
Environmental Exposure Range	- 18 °C to 177 °C [0 °F to 350 °F]
Open Temperature	148.9 °C [300 °F]
Close Temperature	Manual
Open Tolerance	6.7 °C [12 °F]
Dielectric Strength	MIL - STD - 202, Method 301; 2000 Vac 60 Hz - Terminal to Case
Insulation Resistance	MIL - STD - 202, Method 302; Cond. B - 500 MOhm - 500 Vdc applied
Contact Resistance	MIL - STD - 202, Method 307; 0.050 Ohm
Housing Material	Phenolic
Contact Material	Silver/nickel alloy
Approvals	UL, CSA, VDE
Mounting	B249 fixed bracket
Series Name	2455RM

My Links

- Login to iCOM
- Login as Rep/AD
- Login as Guest
- Login to Digital University

Keyword Search

Search for product and support information.

All Sensing and Control▼

Product Search

Part number search:

Use (*) to expand search

Specification Search