SIEMENS

Data sheet 3SB2203-1AC01



Emergency stop mushroom pushbutton, 16 mm, round, plastic, red, latching, with rotate-to-unlatch mechanism, according to ISO 13850, 1 NC, with yellow backing plate, EMERGENCY STOP

product brand name	SIRIUS
product designation	EMERGENCY STOP mushroom pushbuttons
design of the product	Complete unit round with positive latching in accordance with ISO 13850
product type designation	3SB2
Enclosure	
number of command points	1
Actuator	
design of the actuating element	EMERGENCY STOP mushroom pushbutton
principle of operation of the actuating element	latching
product extension optional light source	No
color of the actuating element	red
material of the actuating element	plastic
type of unlocking device	rotate-to-unlatch mechanism
number of switching positions	2
Front ring	
product component front ring	No
Holder	
material of the holder	Plastic
Contact block/ lampholder	
number of lampholders	0
number of switching elements	1
General technical data	
product function	
● positive opening	Yes
● EMERGENCY STOP function	Yes
type of voltage of the operating voltage	AC/DC
protection class IP	IP65
vibration resistance according to IEC 60068-2-6	20 ... 200 Hz: 5g
operating frequency maximum	1 000 1/h
mechanical service life (operating cycles) typical	10 000 000
reference code according to IEC 81346-2	S
Substance Prohibitance (Date)	07/01/2006
Weight	0.02 kg
operating voltage rated value	5 ... 250 V
Auxiliary circuit	
number of NC contacts for auxiliary contacts	1
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
operational current at AC-12	
● at 24 V rated value	10 A

Subject to change without notice
© Copyright Siemens
Downloaded from Arrow.com.


● at 60 V rated value	10 A
● at 110 V rated value	10 A
● at 230 V rated value	10 A
operational current at AC-15	
● at 24 V rated value	4 A
● at 110 V rated value	4 A
● at 230 V rated value	4 A
operational current at DC-12	
● at 24 V rated value	6 A
● at 60 V rated value	5 A
● at 110 V rated value	2.5 A
● at 230 V rated value	1 A
operational current at DC-13	
● at 24 V rated value	3 A
● at 60 V rated value	1.2 A
● at 110 V rated value	0.7 A
● at 230 V rated value	0.3 A
Connections/ Terminals	
type of electrical connection	tab terminals
tightening torque of the screws in the bracket maximum	0.4 N·m
Safety related data	
proportion of dangerous failures	
● with low demand rate according to SN 31920	20 %
● with high demand rate according to SN 31920	20 %
B10 value with high demand rate according to SN 31920	100 000
failure rate [FIT] with low demand rate according to SN 31920	100 FIT
IEC 61508	
T1 value for proof test interval or service life according to IEC 61508	20 a
Ambient conditions	
ambient temperature	
● during operation	-25 ... +70 °C
● during storage	-40 ... +80 °C
environmental category during operation according to IEC 60721	3K6
Installation/ mounting/ dimensions	
fastening method	front plate mounting
shape of the installation opening	round
mounting diameter	16 mm
mounting height	21 mm
installation width	28.5 mm
installation depth	50 mm
Accessories	
marking of backing plate	Yellow backing plate, inscription "NOT-HALT"
Approvals Certificates	
General Product Approval	


Test Certificates			other		Environment
Miscellaneous	Type Test Certificates/Test Report	Special Test Certificate	Confirmation	产品合格 QC PASS	Environmental Confirmations

Further information

Subject to change without notice
© Copyright Siemens
Downloaded from Arrow.com.

Information on the packaging
https://support.industry.siemens.com/cs/ww/en/view/109813875
Information for data generation and storage
https://support.industry.siemens.com/cs/ww/en/view/109995012
Information- and Downloadcenter (Catalogs, Brochures,…)
https://www.siemens.com/ic10
Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SB2203-1AC01
Cax online generator
http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SB2203-1AC01
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/3SB2203-1AC01
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SB2203-1AC01&lang=en

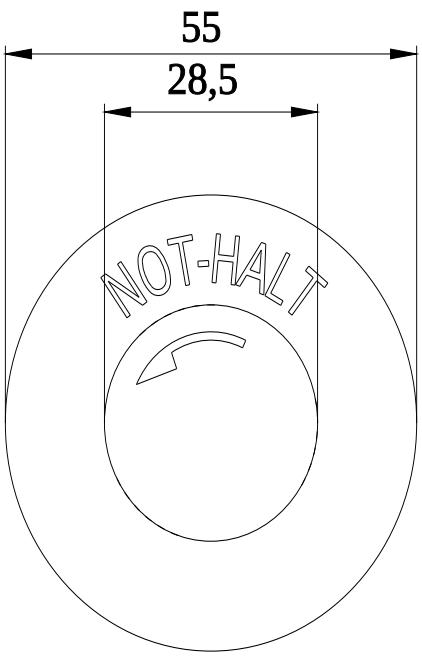

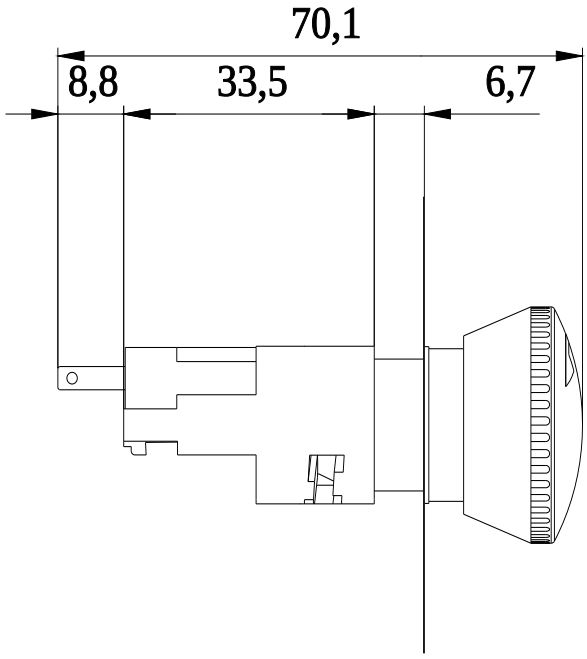

last modified: 4/2/2025

Subject to change without notice
© Copyright Siemens
Downloaded from Arrow.com.