MMBT4403WT1G

Switching Transistor

PNP Silicon

ON Semiconductor®

http://onsemi.com

Features

- Moisture Sensitivity Level: 1
- ESD Rating: Human Body Model; 4 kV, Machine Model; 400 V
- These Devices are Pb−Free, Halogen Free/BFR Free and are RoHS Compliant





SC−70
CASE 419
STYLE 3

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector−Emitter Voltage	V_{CEO}	−40	Vdc
Collector−Base Voltage	V_{CBO}	−40	Vdc
Emitter−Base Voltage	V_{EBO}	−5.0	Vdc
Collector Current − Continuous	I_C	−600	mAdc

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Total Device Dissipation FR−5 Board T_A = 25°C	P_D	150	mW
Thermal Resistance, Junction−to−Ambient	$R_{\theta JA}$	833	°C/W
Junction and Storage Temperature	T_J, T_{stg}	−55 to +150	°C

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

MARKING DIAGRAM



2T = Specific Device Code
M = Date Code
▪ = Pb−Free Package

(Note: Microdot may be in either location)

*Date Code orientation may vary depending upon manufacturing location.

ORDERING INFORMATION

Device	Package	Shipping†
MMBT4403WT1G	SC−70 (Pb−Free)	3000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

© Semiconductor Components Industries, LLC, 2013

April, 2013 − Rev. 4

Publication Order Number:
MMBT4403WT1/D

Downloaded from Arrow.com.

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS				
Collector−Emitter Breakdown Voltage (Note 1) (I_C = −1.0 mAdc, I_B = 0)	$V_{(BR)CEO}$	−40	–	Vdc
Collector−Base Breakdown Voltage (I_C = −0.1 mAdc, I_E = 0)	$V_{(BR)CBO}$	−40	–	Vdc
Emitter−Base Breakdown Voltage (I_E = −0.1 mAdc, I_C = 0)	$V_{(BR)EBO}$	−5.0	–	Vdc
Base Cutoff Current (V_{CE} = −35 Vdc, V_{EB} = −0.4 Vdc)	I_{BEV}	–	−0.1	μAdc
Collector Cutoff Current (V_{CE} = −35 Vdc, V_{EB} = −0.4 Vdc)	I_{CEX}	–	−0.1	μAdc
ON CHARACTERISTICS				
DC Current Gain (I_C = −0.1 mAdc, V_{CE} = −1.0 Vdc) (I_C = −1.0 mAdc, V_{CE} = −1.0 Vdc) (I_C = −10 mAdc, V_{CE} = −1.0 Vdc) (I_C = −150 mAdc, V_{CE} = −2.0 Vdc) (Note 1) (I_C = −500 mAdc, V_{CE} = −2.0 Vdc) (Note 1)	h_{FE}	 30 60 100 100 20	 – – – 300 –	–
Collector−Emitter Saturation Voltage (Note 1) (I_C = −150 mAdc, I_B = −15 mAdc) (I_C = −500 mAdc, I_B = −50 mAdc)	$V_{CE(sat)}$	 – –	 −0.4 −0.75	Vdc
Base−Emitter Saturation Voltage (Note 1) (I_C = −150 mAdc, I_B = −15 mAdc) (I_C = −500 mAdc, I_B = −50 mAdc)	$V_{BE(sat)}$	 −0.75 –	 −0.95 −1.3	Vdc
SMALL−SIGNAL CHARACTERISTICS				
Current−Gain − Bandwidth Product (I_C = −20 mAdc, V_{CE} = −10 Vdc, f = 100 MHz)	f_T	200	–	MHz
Collector−Base Capacitance (V_{CB} = −10 Vdc, I_E = 0, f = 1.0 MHz)	C_{cb}	–	8.5	pF
Emitter−Base Capacitance (V_{BE} = −0.5 Vdc, I_C = 0, f = 1.0 MHz)	C_{eb}	–	30	pF
Input Impedance (I_C = −1.0 mAdc, V_{CE} = −10 Vdc, f = 1.0 kHz)	h_{ie}	1.5	15	kΩ
Voltage Feedback Ratio (I_C = −1.0 mAdc, V_{CE} = −10 Vdc, f = 1.0 kHz)	h_{re}	0.1	8.0	X 10^{-4}
Small−Signal Current Gain (I_C = −1.0 mAdc, V_{CE} = −10 Vdc, f = 1.0 kHz)	h_{fe}	60	500	–
Output Admittance (I_C = −1.0 mAdc, V_{CE} = −10 Vdc, f = 1.0 kHz)	h_{oe}	1.0	100	μmhos
SWITCHING CHARACTERISTICS				
Delay Time	(V_{CC} = −30 Vdc, V_{EB} = −2.0 Vdc, I_C = −150 mAdc, I_{B1} = −15 mAdc)	t_d	–	15	ns
Rise Time		t_r	–	20	
Storage Time	(V_{CC} = −30 Vdc, I_C = −150 mAdc, I_{B1} = I_{B2} = −15 mAdc)	t_s	–	225	ns
Fall Time		t_f	–	30	

1. Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

SWITCHING TIME EQUIVALENT TEST CIRCUIT

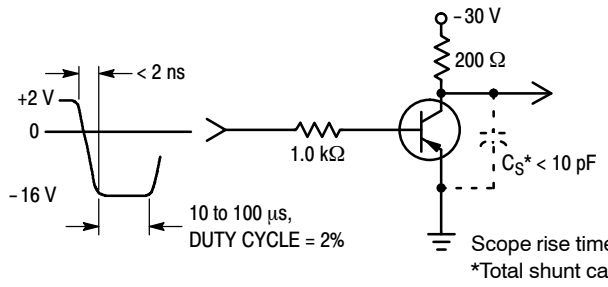

Figure 1. Turn−On Time

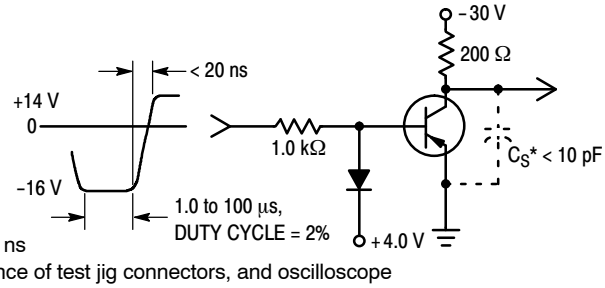

Figure 2. Turn−Off Time

Scope rise time < 4.0 ns
*Total shunt capacitance of test jig connectors, and oscilloscope

Downloaded from Arrow.com.

TRANSIENT CHARACTERISTICS

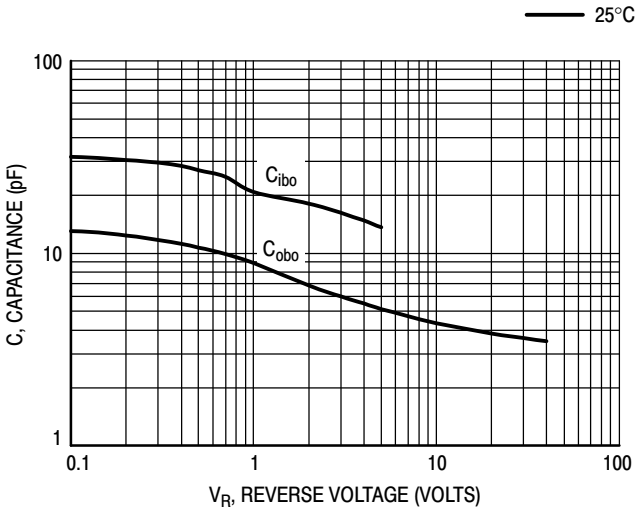

Figure 3. Capacitances

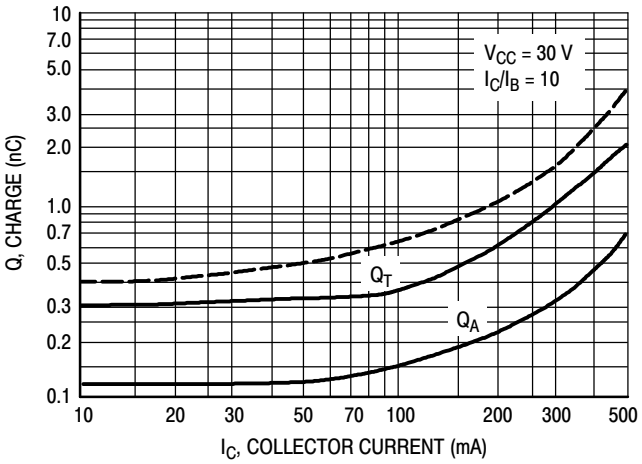

Figure 4. Charge Data

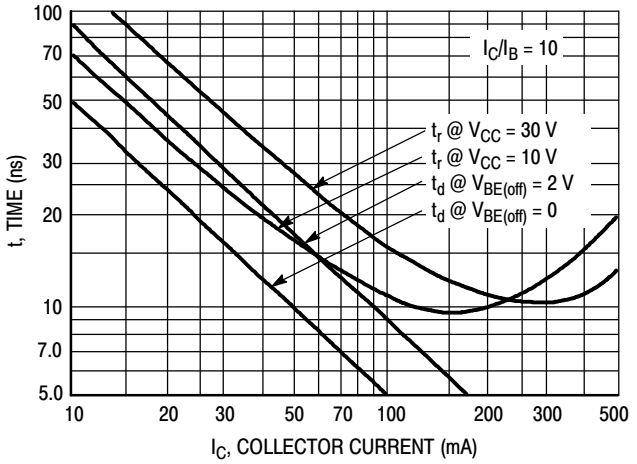

Figure 5. Turn−On Time

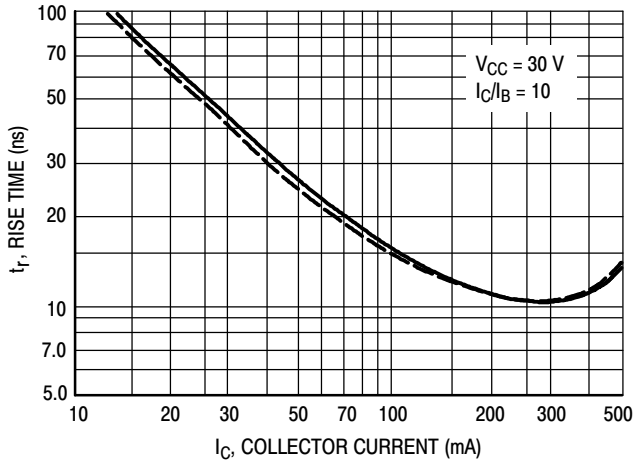

Figure 6. Rise Time

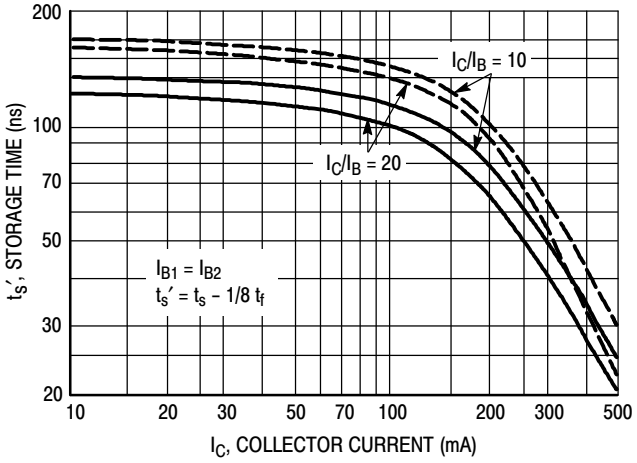

Figure 7. Storage Time

Downloaded from Arrow.com.

SMALL−SIGNAL CHARACTERISTICS NOISE FIGURE

V_{CE} = −10 Vdc, T_A = 25°C; Bandwidth = 1.0 Hz

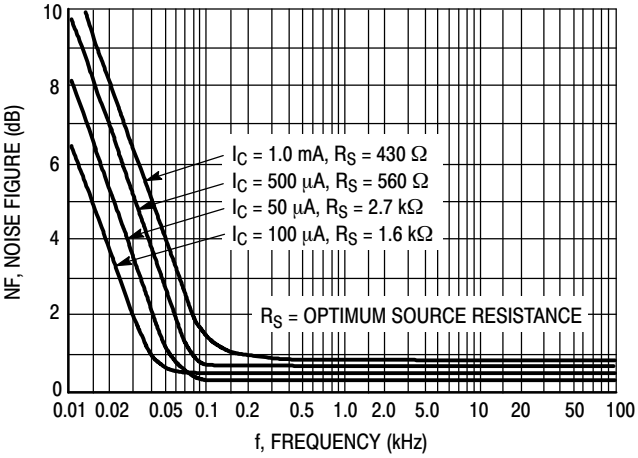

Figure 8. Frequency Effects

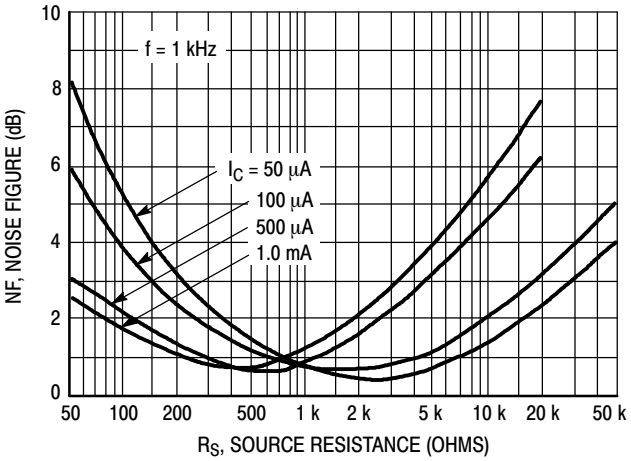

Figure 9. Source Resistance Effects

h PARAMETERS

V_{CE} = 10 Vdc, f = 1.0 kHz, T_A = 25°C

This group of graphs illustrates the relationship between h_{fe} and other "h" parameters for this series of transistors. To obtain these curves, a high−gain and a low−gain unit were selected from the MMBT4403WT1 lines, and the same units were used to develop the correspondingly numbered curves on each graph.

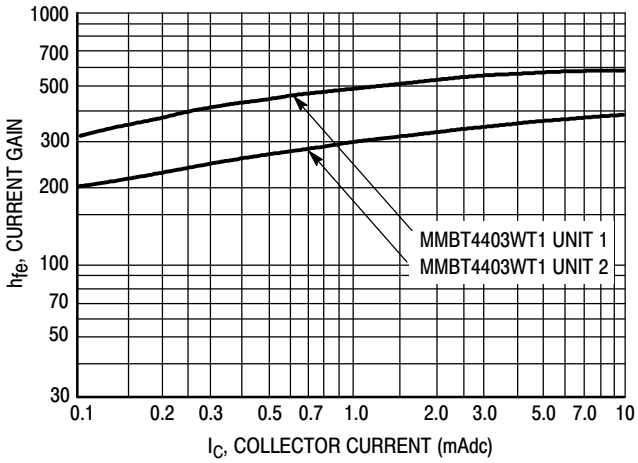

Figure 10. Current Gain

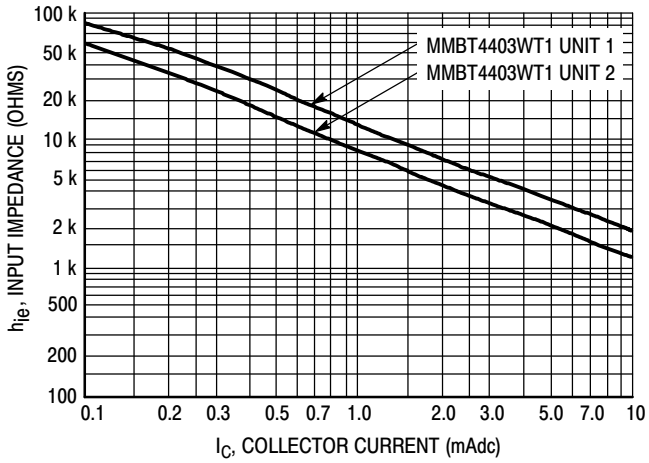

Figure 11. Input Impedance

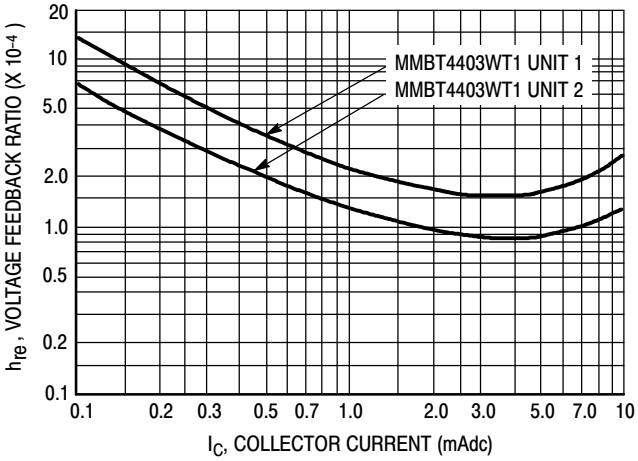

Figure 12. Voltage Feedback Ratio

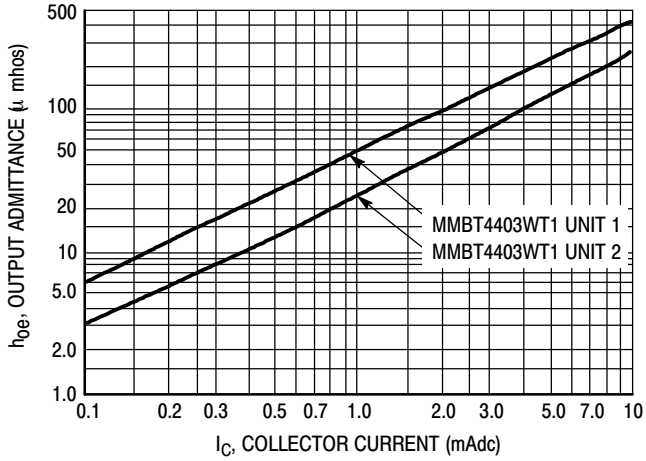

Figure 13. Output Admittance

Downloaded from Arrow.com.

STATIC CHARACTERISTICS

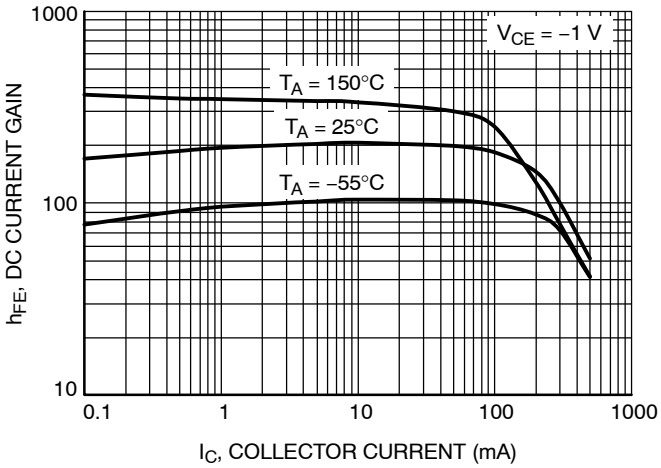

Figure 14. DC Current Gain vs. Collector Current

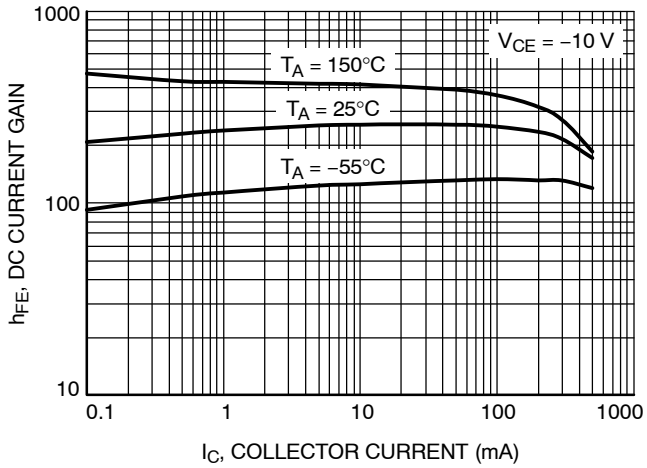

Figure 15. DC Current Gain vs. Collector Current

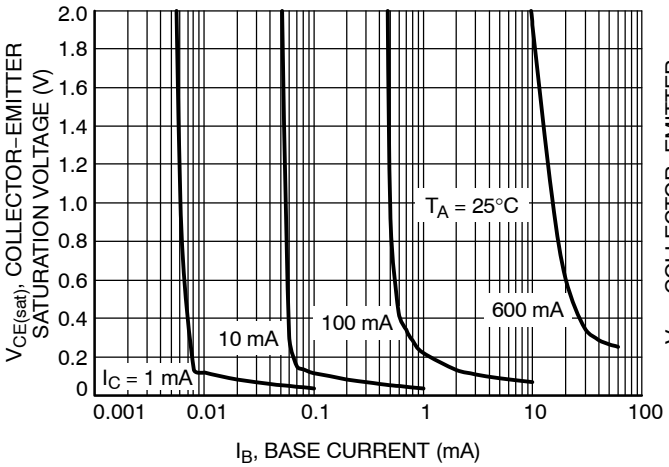

Figure 16. Saturation Region

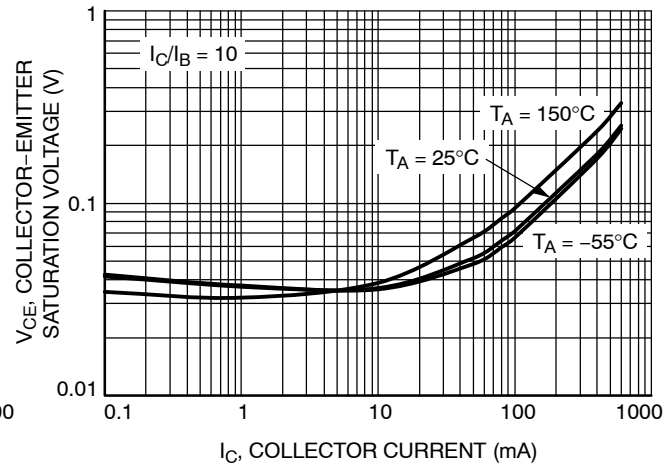

Figure 17. Collector Emitter Saturation Voltage vs. Collector Current

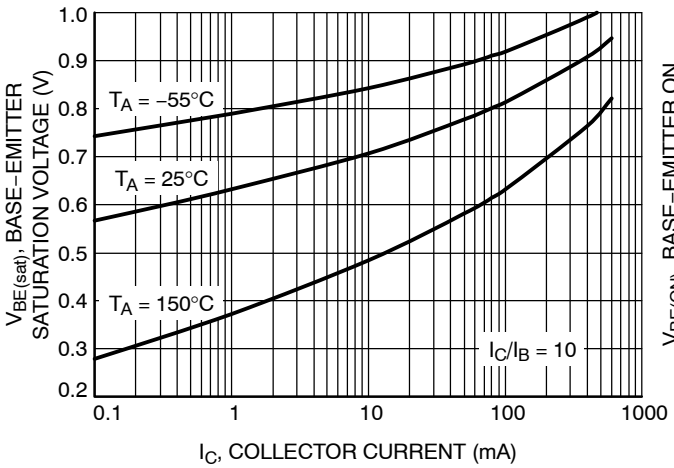

Figure 18. Base Emitter Saturation Voltage vs. Collector Current

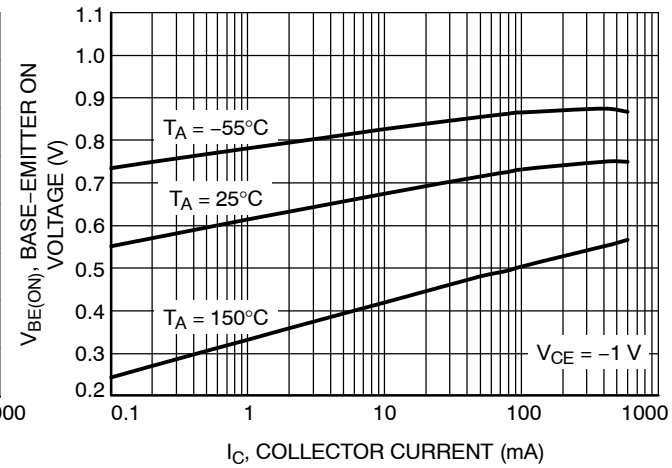

Figure 19. Base−Emitter Turn−On Voltage vs. Collector Current

Downloaded from Arrow.com.

STATIC CHARACTERISTICS

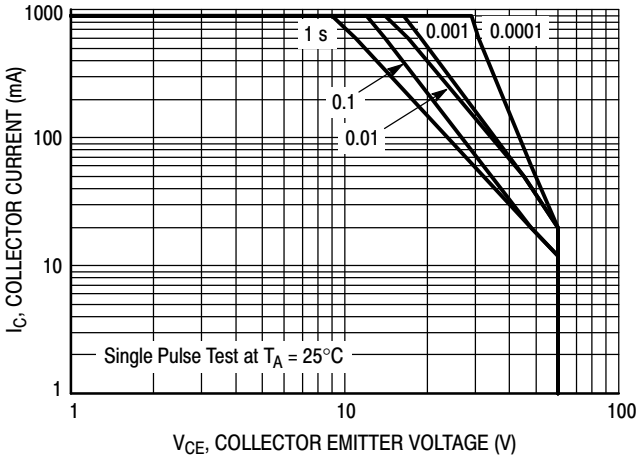

Figure 20. Safe Operating Area

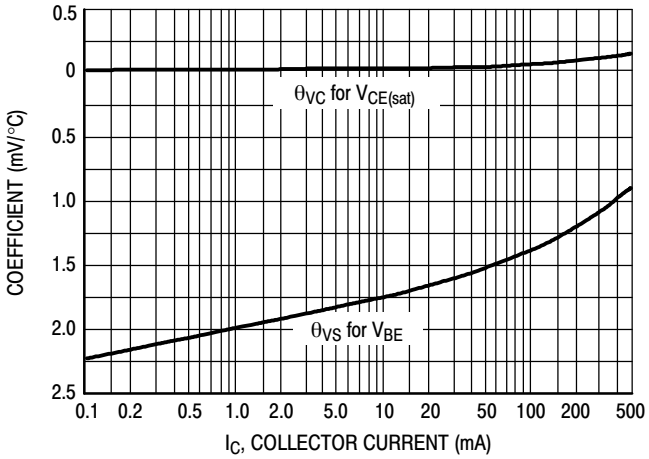

Figure 21. Temperature Coefficients

Downloaded from Arrow.com.



SCALE 4:1

SC−70 (SOT−323)
CASE 419
ISSUE P

DATE 07 OCT 2021



TOP VIEW

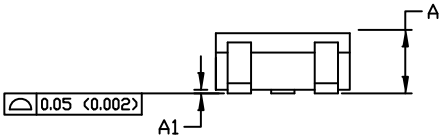

SIDE VIEW



END VIEW

NOTES:
1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH

DIM	MILLIMETERS			INCHES		
	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.
A	0.80	0.90	1.00	0.032	0.035	0.040
A1	0.00	0.05	0.10	0.000	0.002	0.004
A2	0.70 REF			0.028 BSC		
b	0.30	0.35	0.40	0.012	0.014	0.016
c	0.10	0.18	0.25	0.004	0.007	0.010
D	1.80	2.10	2.20	0.071	0.083	0.087
E	1.15	1.24	1.35	0.045	0.049	0.053
e	1.20	1.30	1.40	0.047	0.051	0.055
e1	0.65 BSC			0.026 BSC		
L	0.20	0.38	0.56	0.008	0.015	0.022
H_E	2.00	2.10	2.40	0.079	0.083	0.095

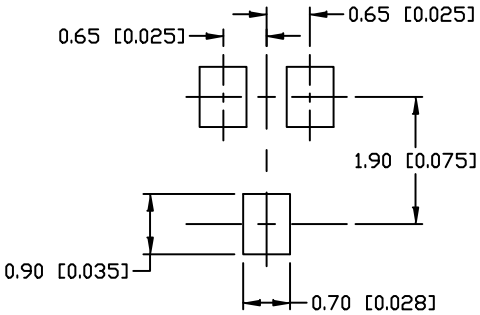

* For additional information on our Pb−Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

SOLDERING FOOTPRINT

GENERIC MARKING DIAGRAM



XX = Specific Device Code
M = Date Code
▪ = Pb−Free Package

*This information is generic. Please refer to device data sheet for actual part marking. Pb−Free indicator, “G” or microdot “▪”, may or may not be present. Some products may not follow the Generic Marking.

STYLE 1:
CANCELLED

STYLE 2:
PIN 1. ANODE
2. N.C.
3. CATHODE

STYLE 3:
PIN 1. BASE
2. EMITTER
3. COLLECTOR

STYLE 4:
PIN 1. CATHODE
2. CATHODE
3. ANODE

STYLE 5:
PIN 1. ANODE
2. ANODE
3. CATHODE

STYLE 6:
PIN 1. EMITTER
2. BASE
3. COLLECTOR

STYLE 7:
PIN 1. BASE
2. EMITTER
3. COLLECTOR

STYLE 8:
PIN 1. GATE
2. SOURCE
3. DRAIN

STYLE 9:
PIN 1. ANODE
2. CATHODE
3. CATHODE−ANODE

STYLE 10:
PIN 1. CATHODE
2. ANODE
3. ANODE−CATHODE

STYLE 11:
PIN 1. CATHODE
2. CATHODE
3. CATHODE

DOCUMENT NUMBER:	**98ASB42819B**	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped “CONTROLLED COPY” in red.
DESCRIPTION:	**SC−70 (SOT−323)**	**PAGE 1 OF 1**

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba **onsemi** or its subsidiaries in the United States and/or other countries. **onsemi** reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.

Downloaded from Arrow.com.

onsemi, onsemi, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent−Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as−is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:
Email Requests to: orderlit@onsemi.com

onsemi Website: www.onsemi.com

TECHNICAL SUPPORT
North American Technical Support:
Voice Mail: 1 800−282−9855 Toll Free USA/Canada
Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support:
Phone: 00421 33 790 2910
For additional information, please contact your local Sales Representative

◊

Downloaded from Arrow.com.