Fair-Rite Products Corp.
Your Signal Solution®

Round Cable EMI Suppression Cores (2631540002)

Part Number: 2631540002

31 ROUND CABLE CORE

Explanation of Part Numbers:
– Digits 1 & 2 = Product Class
– Digits 3 & 4 = Material Grade
– Last digit 2 = Burnished (All cable cores have been burnished to remove the sharp edges)

Fair-Rite offers a broad selection of ferrite EMI suppression cable cores in several materials with guaranteed minimum impedance specifications.

For smaller suppression parts, refer to the section EMI Suppression Beads.

Our Expanded Cable and Suppressor Kit (part number 0199000005) contains a selection of these suppression cores.

For any cable suppression core not listed here, feel free to contact our customer service group for availability and pricing.

The C dimension, the core length, can be modified to suit specific applications.

Weight: 17.7 (g)

Dim	mm	mm tol	nominal inch	inch misc.
A	14.3	±0.45	0.563	_
B	6.35	±0.25	0.25	_
C	28.6	±0.75	1.126	_

Cable Information			
Max Diameter	Max Dimension	Solid Equivalent	Flat Cable Cores
0 0	_	0431164281	-

Chart Legend
+ Test frequency

The column “H (Oe)” gives for each bead the calculated dc bias field in oersted for 1 turn and 1 ampere direct current. The actual dc H field in the application is this value of “H” times the actual

Downloaded from Arrow.com.

NI (ampere-turn) product. For the effect of the dc bias on the impedance of the bead material, see figures 18-23 in the application note "How to choose Ferrite Components for EMI Suppression".


Typical Impedance (Ω)	
1 MHz	46
5 MHz	110
10 MHz+	135
25 MHz+	200
100 MHz+	322
250 MHz	354

Electrical Properties	
H(Oe)	0.43


Suppression cable cores are controlled for impedances only. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is typically the listed impedance less 20%.

Single turn impedance tests for 31® , 43® and 46 material cores are performed on the E4991A/HP4291B Impedance Analyzer. The 61 material parts are tested on the E4991A / HP4291B Impedance Analyzer and 75 material parts are tested on the E4990A Impedance Analyzer. Cores are tested with the shortest practical wire length.

Typical Impendance (Ω)	
1 MHz	35
5 MHz	91
10 MHz+	119
25 MHz+	181
100 MHz+	300
250 MHz	280

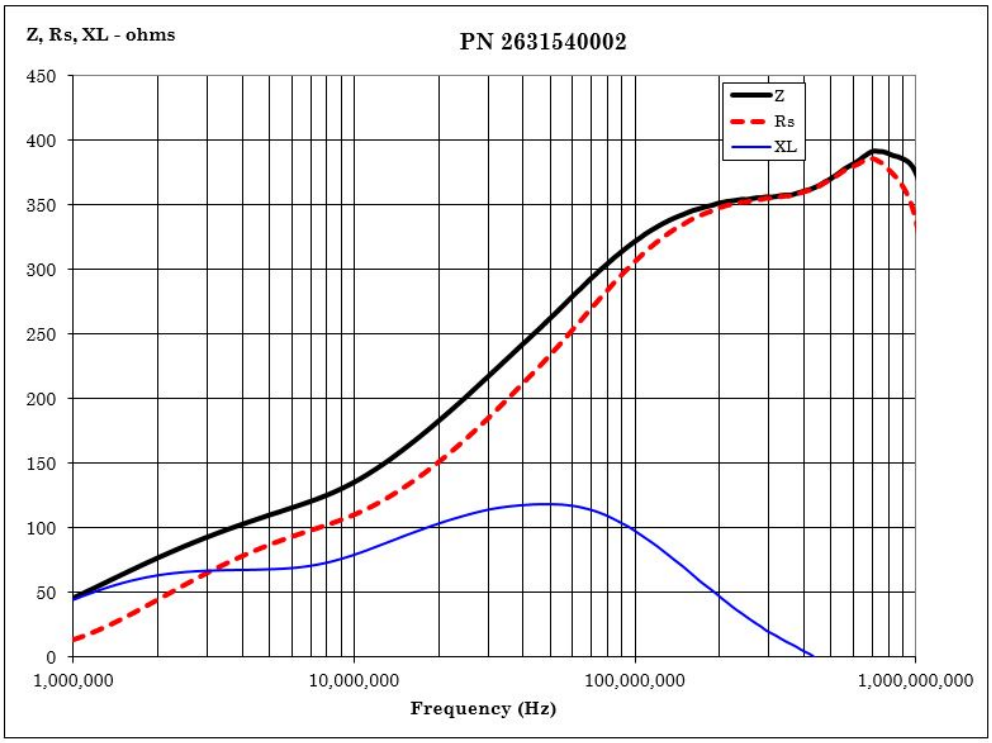

Downloaded from Arrow.com.

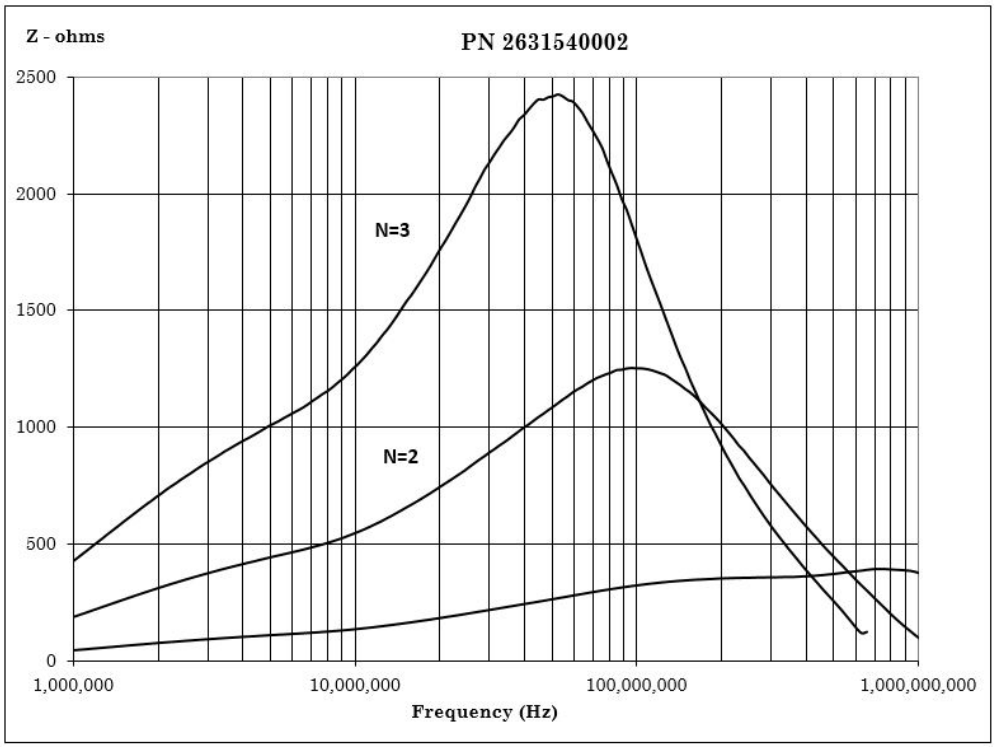

CSV Download

Fair-Rite Products Corp. • One Commercial Row, Wallkill, New York 12589-0288
888-324-7748 • 845-895-2055 • Fax: 845-895-2629 • ferrites@fair-rite.com • www.fair-rite.com

Downloaded from Arrow.com.