




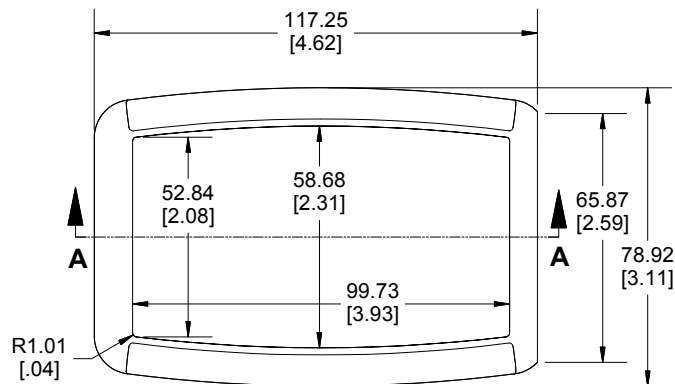


TOP VIEW

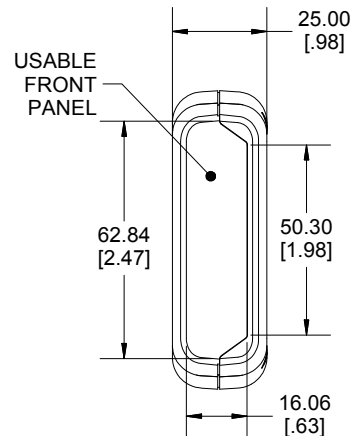


FRONT VIEW

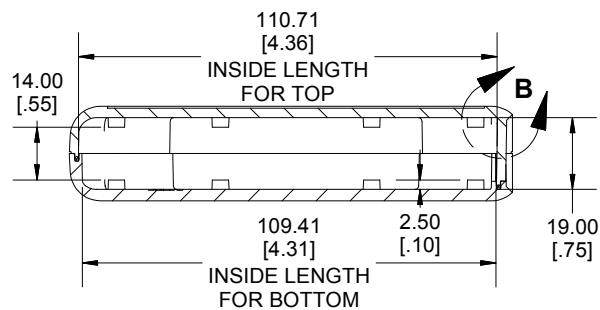

**SECTION A-A
SIDE VIEW**



**DETAIL B
SCALE 1 : 1**

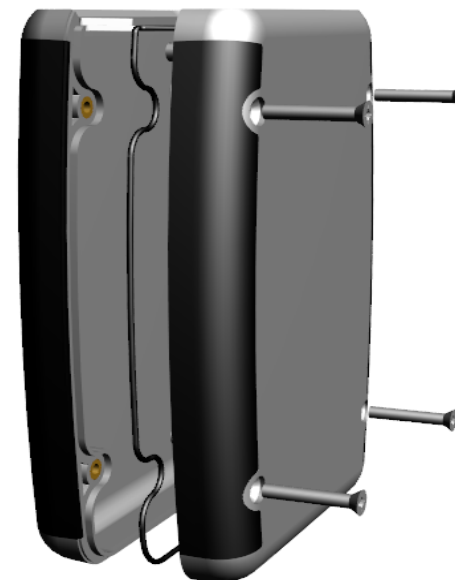

Enclosures can be Factory Modified (Milling, Drilling, Printing etc.)
Contact Factory mjm@hammondmfg.com for quotes
Solid models of this enclosure available in STEP or IGES.
(Part number and text placement/orientation on our products are subject to change,
we do not recommend using them as a locating reference for modification purposes)

NOTE

Enclosure made from UV Stabilized, FR ABS (UL 94-V0) plastic.

Purchased assembly includes Top, Bottom, Pre-Installed Silicone Gasket,
and 4 Cover Screws. M3 Brass Inserts are Pre-Installed.

Recommended Cover screw torque -- 2.5 lbf-in (30 cN-m)

PART NUMBER

1553WB Liquid Resistant Enclosure

Black Enclosure/Grey Over-mold 1553WBBK


Grey Enclosure/Grey Over-mold 1553WBGY

ACCESSORIES


Silicone Pre-formed Gaskets (Pkg 2) 1553WBGASKET

Stainless Steel Cover screw (Pkg 100)
[M3-0.5 X 18mm] SC1553WB100BK
(Black)

P.C. Board Plastite Self Tapping Screw
[#2 X 3/16" (6.4mm) Plated] 1553WTS100 (Pkg 100)

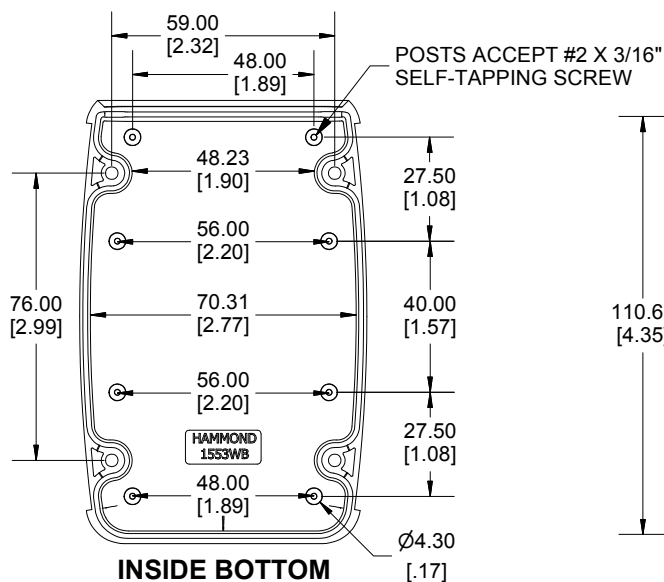

INSIDE BOTTOM

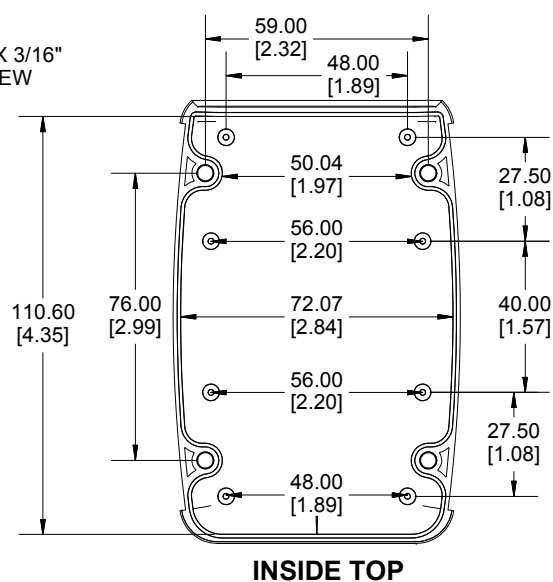

INSIDE TOP

Dimensions:
mm
[inches]

**HAMMOND
MANUFACTURING .**
1553WB
www.hammondmfg.com