

NLCV25T-220K-EF

Product Status	Production
Applications	Commercial Grade
	No Directivity
Feature	Wire Wound
	Ferrite Core
Series Type	NLCV25-EF
Brand	TDK
Environmental Compliance	 RoHS  REACH  Halogen Free  Lead Free



Size	
Length(L)	2.50mm ± 0.20 mm
Width(W)	2.00mm ± 0.10 mm
Thickness Height	1.80mm ± 0.10 mm
Recommended Land Pattern (A)	1.00mm Nom.
Recommended Land Pattern (B)	1.50mm Nom.
Recommended Land Pattern (C)	1.50mm Nom.

Electrical Characteristics	
Inductance	22 μ H $\pm 10\%$ at 2.52MHz
Rated Current	160mA
DC Resistance [Typ.]	2.8 Ω
DC Resistance [Max.]	3.64 Ω
Self Resonant Frequency [Min.]	18MHz
Self Resonant Frequency [Typ.]	
Q [Min.]	
Q [Typ.]	30 at 2.52MHz







Other	
Operating Temp. Range	-40 to 105°C (Including Self-Temp. Rise)
Soldering Method	Wave (Flow) Reflow Iron Soldering
AEC-Q200	NO
Packing	Embossed (Plastic)Taping [180mm Reel]
Package Quantity	2000pcs
Weight	0.025g

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.

Characteristic Graphs (This is reference data, and does not guarantee the products characteristics.)

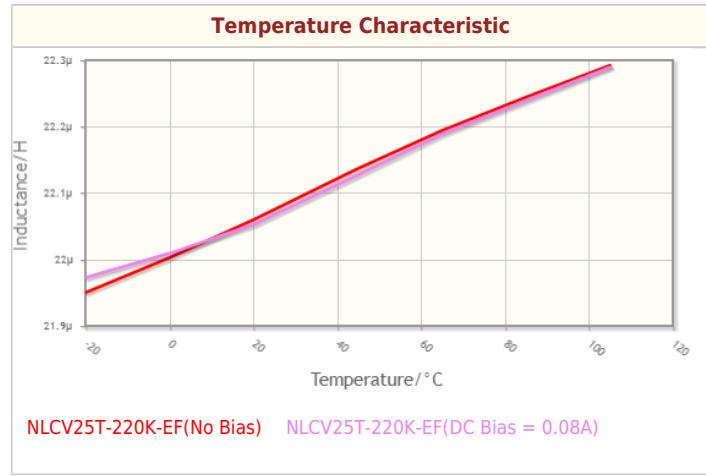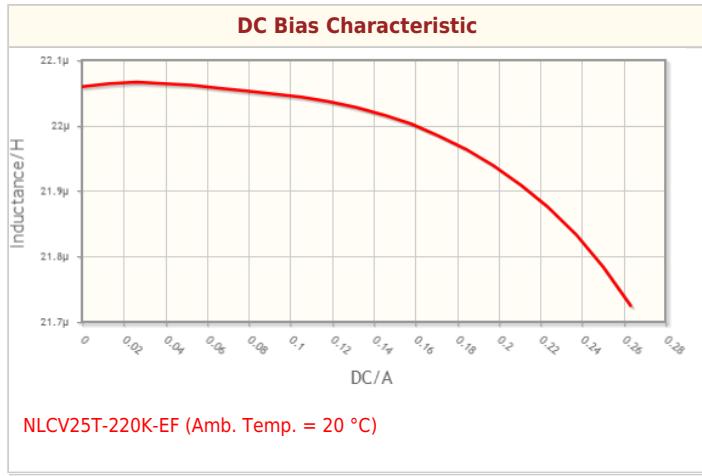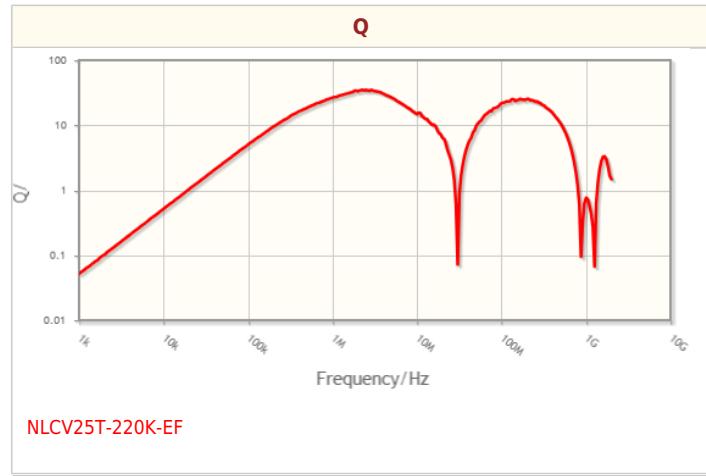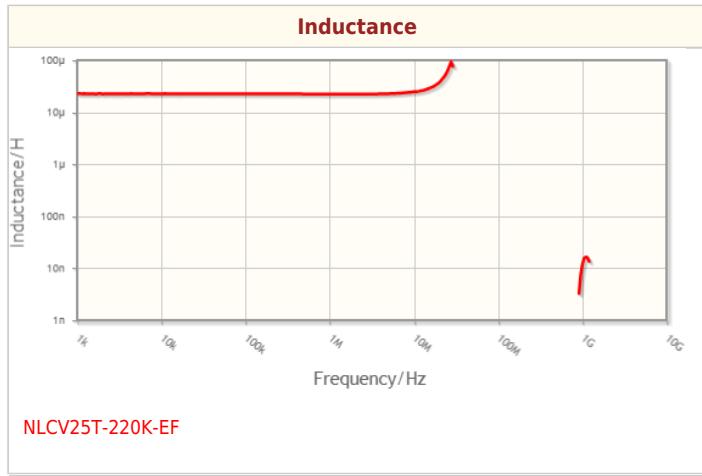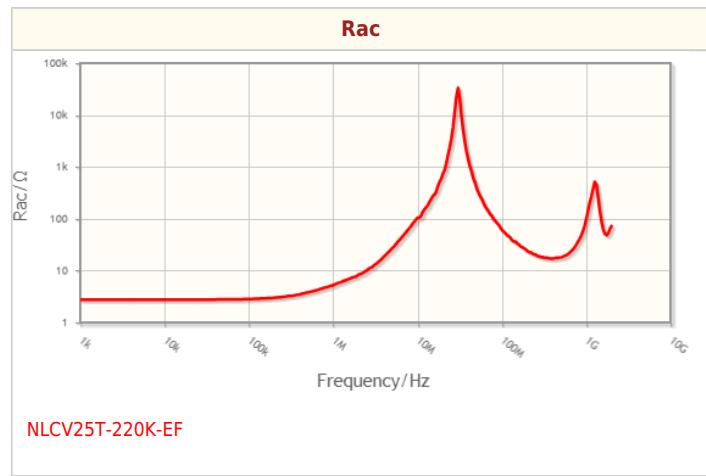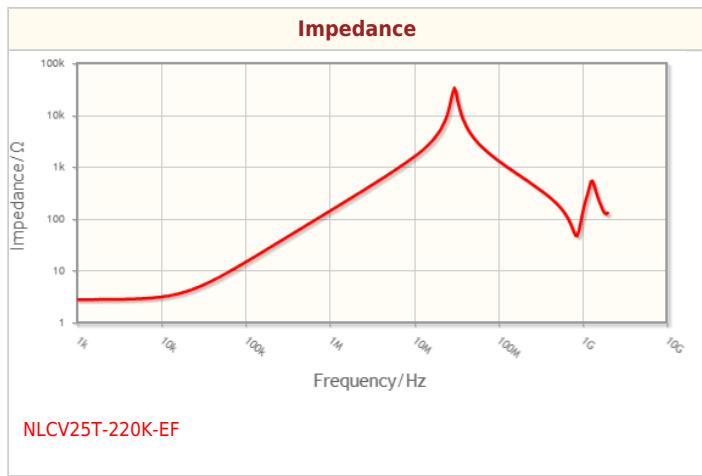


! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.



Characteristic Graphs (This is reference data, and does not guarantee the products characteristics.)

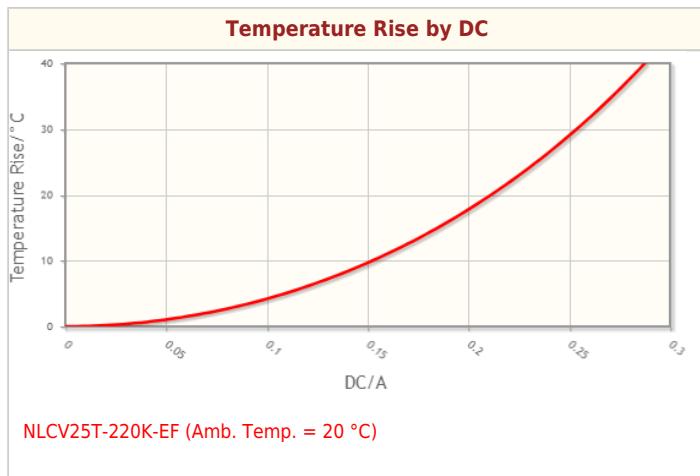

! Images are for reference only and show exemplary products.
! This PDF document was created based on the data listed on the TDK Corporation website.
! All specifications are subject to change without notice.

NLCV25T-220K-EF

Associated Images

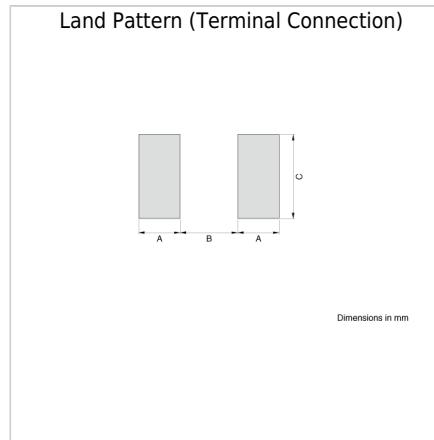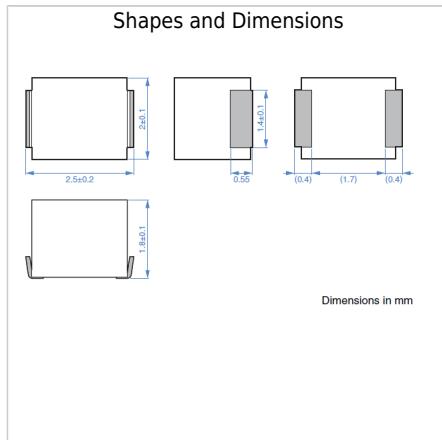

! Images are for reference only and show exemplary products.
! This PDF document was created based on the data listed on the TDK Corporation website.
! All specifications are subject to change without notice.