


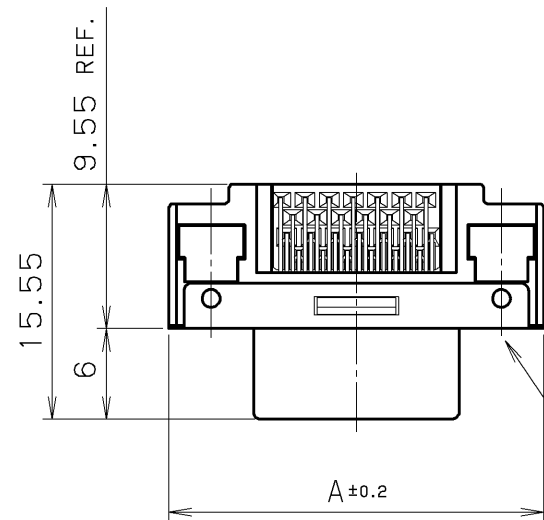


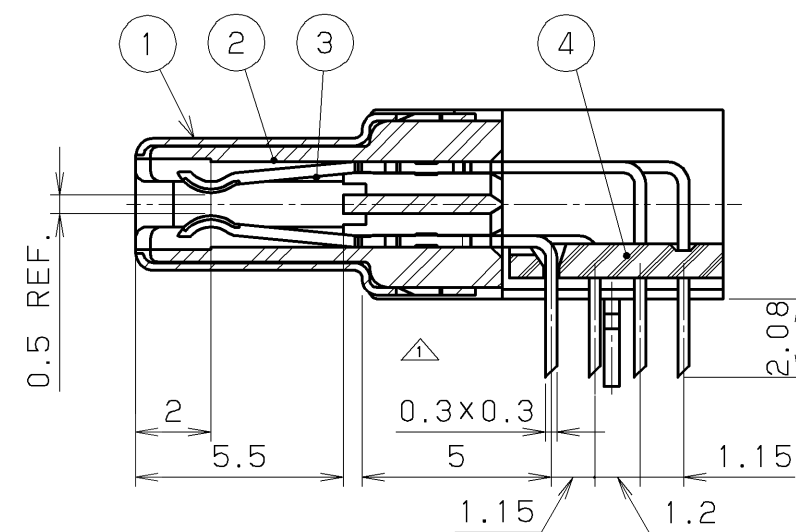


PART No.	TYPE	NOTE
HDR-EC () LFDT1+		
HDR-EC () LFDT1-SLD+	SCREW LOCK TYPE	
HDR-EC () LFDT1-SLE+	SPRING LOCK TYPE	
HDR-EC () LFDT1-SLG+	SCREW LOCK (PANEL MOUNT)	SEE NOTE. #4
HDR-EC () LFDT1-SLGS+	SCREW LOCK (PANEL MOUNT)	SEE NOTE. #4 AND #5
HDR-EC () LFDT1-SLF+	SCREW LOCK (PANEL MOUNT)	SEE NOTE. #4
HDR-EC () LFDT1-SLM+	SCREW LOCK (PANEL MOUNT)	SEE NOTE. #4



CONTACT DETAIL

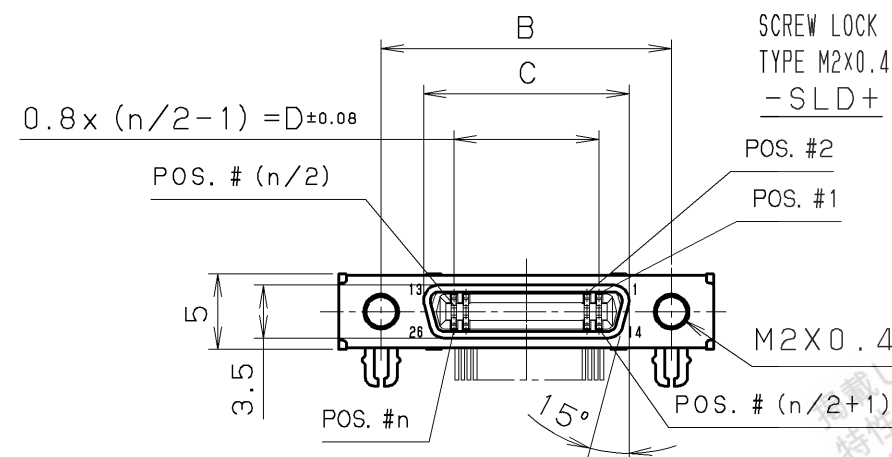

DATE CODE INDICATION

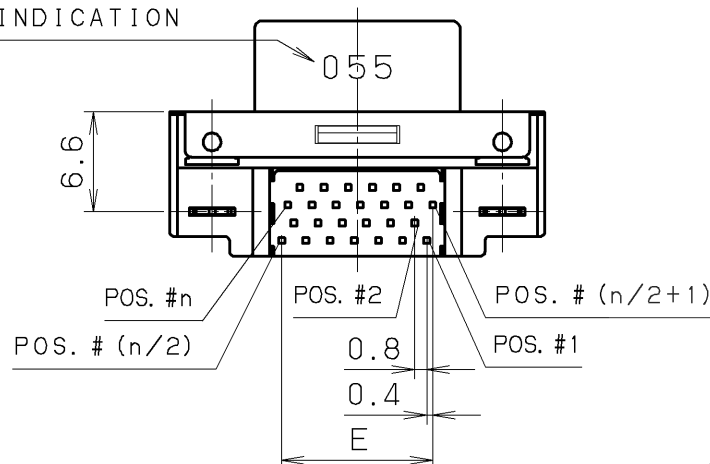

NOTE

1. CONTACT PLATING
MATING AREA: 0.1 MICROMETERS MINIMUM GOLD PLATING
OVER PALLADIUM/NICKEL 0.5 MICROMETERS PLATING
TERMINATION AREA: GOLD FLASH


UNDERPLATING: NICKEL PLATING

2. MATING CONNECTOR
HDR-E () MAG1+

3. SPECIFICATION
RATED CURRENT 0.5A
RATED VOLTAGE 125V AC (r. m. s.)

4. TWO LOCK SCREWS ARE
SUPPLIED WITH A CONNECTOR.

5. ADHESIVE IS PRE-APPLIED TO THE
THREAD FOR THE PREVENTION OF
SCREW LOOSENESS.

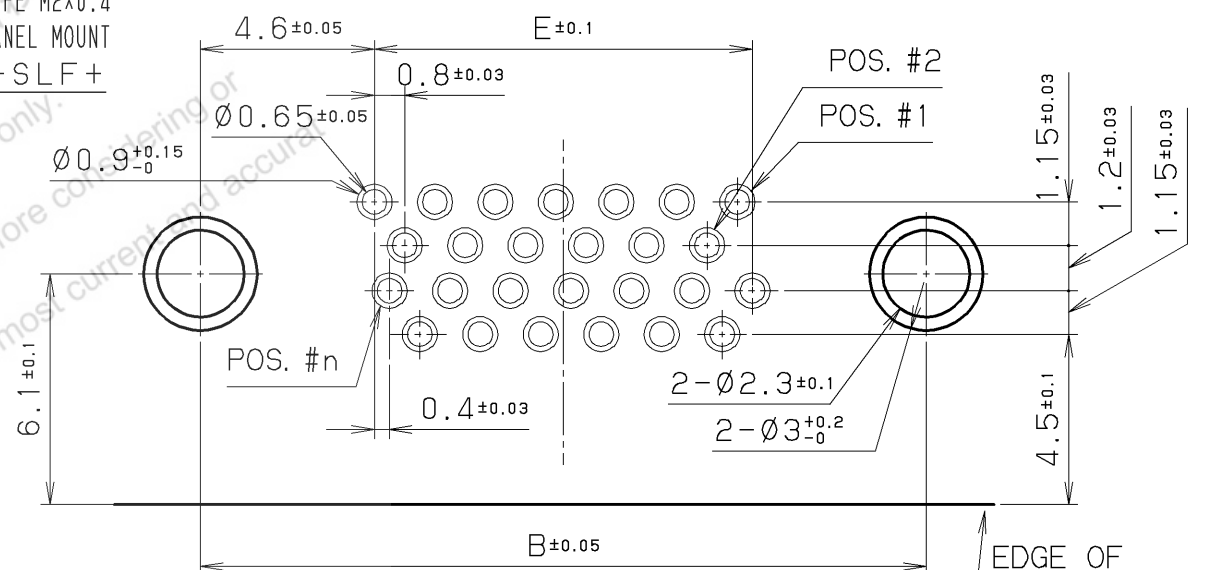

RECOMMENDED P. C. B. LAYOUT
(MOUNT SIDE VIEW)

(t=1.6 SCALE=5/1)

HDR-EC50LFDT1-() +	50	34.4	28.8	23.2	0.8x24=19.2	19.6	YES
HDR-EC26LFDT1-() +	26	24.8	19.2	13.6	0.8x12=9.6	10	YES
HDR-EC14LFDT1-() +	14	20	14.4	8.8	0.8x6=4.8	5.2	YES
PART NO.	n (NO. OF POS.)	A	B	C	D	E	RELEASE
DIMENSIONS							

				6	LOCK SCREW	STEEL	2	NICKEL	_____
				5	BOARD LOCK	PHOSPHOR BRONZE	2	TIN	_____
⚠	AUG 03 2012	M. K	ADD P/N.	4	BRACKET	PPS (GF)	1	_____	UL94V-0 BLACK
⚠	JUL 13 2012	M. K	ADD P/N.	3	FEMALE CONTACT	PHOSPHOR BRONZE	n	NOTE. # 1	_____
⚠	OCT 06 2009	K. E	ADD P/N.	2	INSULATOR	PA9T (GF)	1	_____	UL94V-0 BLACK
⚠	OCT 18 2005	Y. K	Added Dim.	1	SHELL	STEEL	1	NICKEL	_____
LTR.	DATE	BY	REV. DESCRIPT	No.	PART NAME	MATERIAL	QTY	FINISH	NOTE

DATE		SCALE		UNIT		HTK HONDA TSUSHIN KOGYO CO., LTD.					
May.25.2005		2 / 1		mm (INCH)						3RD. A. P	
APP. DATE&REV.											
DR.	DE.	CHK.	CHK.	APP.		NAME		0.8mm SPACING RIGHTANGLE FEMALE CONNECTOR			
R.DOINAGA	R.DOINAGA	M.KASAHARA	——	S.WATANABE		PART NO.		HDR-EC () LFDT1-() +			
								REV. 4E			