



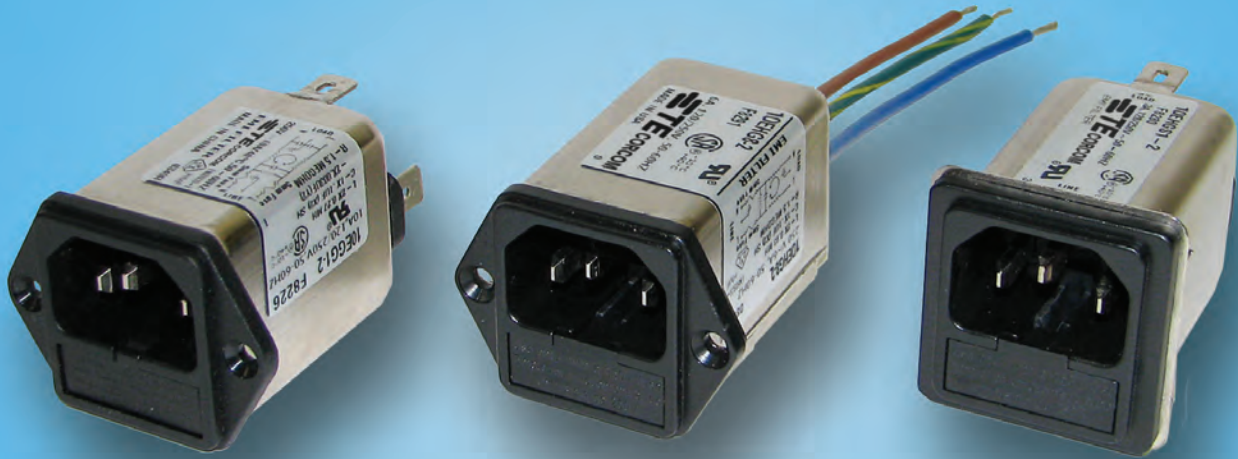

Introducing Corcom GG Series 10A & Wire Leaded Options

The Corcom GG Series of power entry modules series has been expanded to include a 10A current rating for all versions and a 5" wire lead option for the HG medical versions. The GG series of power entry modules combine the functions of a general purpose RFI filter with an IEC power cord connector and single or dual metric fusing. The HG models are designed for medical applications with reduced line-to-ground capacitance to meet patient care equipment requirements.

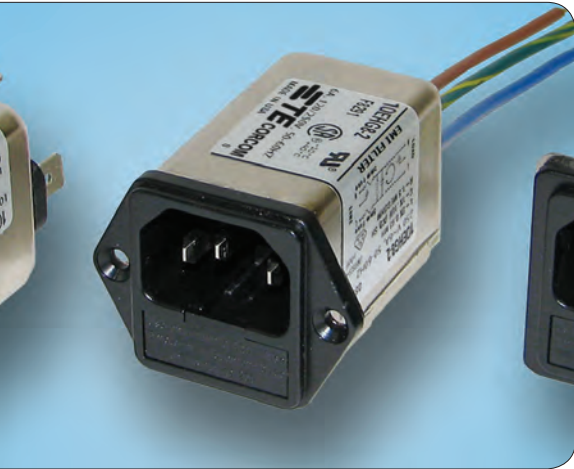

KEY FEATURES

- Filtered medical and general purpose power entry modules
- 5" wire leads now available for filtered medical models
- up to 10A max ratings now available for all models
- Compact size
- Single or dual metric fuse
- Rated to 250 VAC
- UL Recognized, CSA Certified and VDE Approved
- RoHS Compliant

APPLICATIONS

- Communication Equipment
- Instrumentation
- Medical Equipment
- Computers
- Consumer Electronics
- Portable Electronic Devices
- Light Industrial
- Vending
- Exercise Equipment

STANDARDS AND SPECIFICATIONS


- UL Recognized
- CSA Certified
- VDE Approved



ELECTRICAL SPECIFICATIONS

		HG Models	GG Models
Maximum leakage current each Line to Ground:	@120 VAC 60 Hz:	2 μ A	.25 mA
	@ 250 VAC 50 Hz:	5 μ A	.42 mA
Hipot rating (one minute):	Line to Ground:	2250 VDC	
	Line to Line:	1450 VDC	
Rated Voltage (max.):		250 VAC	
Operating Frequency:		50/60 Hz	
Rated Current:		1 to 10A	
Required Fuse(s):		5 x 20 mm (not included)	

ELECTRICAL SCHEMATICS

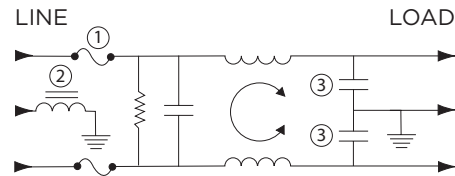

Note 1: Second fuse only in -2 version
 Note 2: C versions only
 Note 3: not present in HG versions

PRODUCT OFFERING

Snap-in	Flange mount	Flange mount with wire leads	
1609117-7: 10EGS1-1	3-1609115-4: 10EGG1-1	3-1609115-5: 10EGG8-1	1-1609117-4: 1EHG8-2
1609117-8: 10EGS1-2	3-1609115-3: 10EGG1-2	3-1609115-6: 10EGG8-2	1-1609117-5: 3EHG8-2
1609116-6: 10EHGS1-2	6609116-4: 10EHG1-2	6609116-5: 10EHG8-2	1-1609117-6: 6EHG8-2

ORDERING INFORMATION

10 E GG 1 C-2

Metric Fuse Holders

- 1 - Single
- 2 - Double

Ground Circuit Inductor

Omit if none

Output Styles

- 1 - .250 [6.3] spade terminals
- 8 - Wire leads

Filter Type & Mounting

- GG - General purpose filter, flange mount
- HG - Medical filter, flange mount
- GS - General purpose filter, snap-in mount
- HGS - Medical filter, snap-in mount

Leakage current desination

E - Low leakage (<0.5 mA)

Current Rating

1, 3, 6 or 10A

PERFORMANCE DATA

Minimum Insertion Loss - Measured in closed 50 Ohm system

Common Mode / Asymmetrical (Line to Ground)


Part No.	Frequency — MHz								
	.01	.05	.10	.15	.5	1	5	10	30
10A GG& GS	-	1	2	4	6	8	26	33	28
10A HG	1	-	-	3	5	6	8	9	10

Differential Mode / Asymmetrical (Line to Line)

Part No.	Frequency — MHz							
	.10	.15	.5	1	3	5	10	30
10A GG& GS	4	7	17	23	-	22	43	38
10A HG	-	8	16	22	-	37	43	28

CASE STYLES


GG1, GG1C & HG1

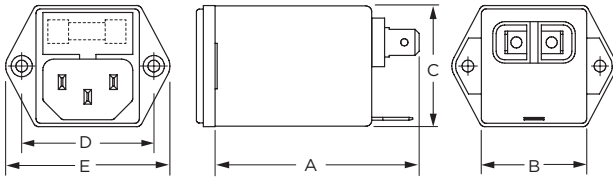

Typical Dimensions:

Mounting Holes (2): .132 [3.35] Dia. with .236 [5.99] Dia. x 90° countersink for #4 flathead screw
 Line Inlet (1): IEC 60320-1 C14
 Load terminals (2): .250 [6.3] with .07 [1.8] Dia. hole
 Ground terminal (1): .250 [6.3] with .07 x .16 [1.8x 3.8] slot


GS1 & HGS1

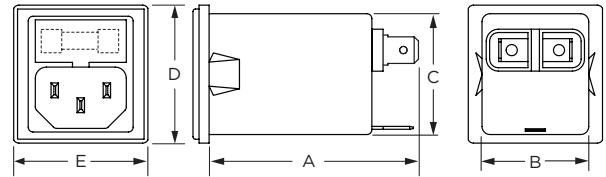

Typical Dimensions:

Line Inlet (1): IEC 60320-1 C14
 Load terminals (2): .250 [6.3] with .07 [1.8] Dia. hole
 Ground terminal (1): .250 [6.3] with .07 x .16 [1.8x 3.8] slot


GG8 & HG8

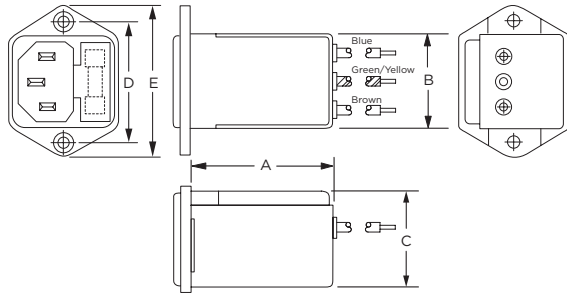

Typical Dimensions:

Mounting Holes (2): .132 [3.35] Dia. with .236 [5.99] Dia. x 90° countersink for #4 flathead screw
 Line Inlet (1): IEC 60320-1 C14
 Wire Leads: 4.0 [101.6] Min., 18AWG, UL1015

Recommended Panel Cutout

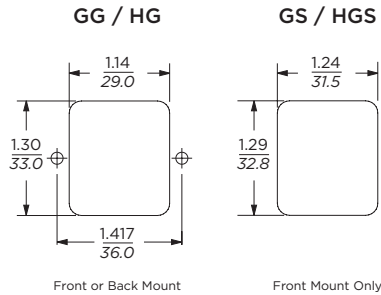

Front or Back Mount

Front Mount Only

Typical Dimensions

GS / HGS panel thickness: 0.032 - 0.080 [0.81 - 2.03]
 Corner radius: 0.138 [0.35]

CASE DIMENSIONS

Part No.	A (max)	B (max)	C (max)	D ±0.015 ±0.38	F (max)
GG1, HG1	2.13	1.13	1.29	1.417	1.76
	54.5	28.7	32.8	36.0	44.7
GG1C	2.45	1.13	1.28	1.417	1.76
	62.23	28.7	32.5	36.0	44.7
GS1, HGS1	2.13	1.13	1.28	1.46*	1.42
	54.0	28.7	32.5	36.0*	36.1
GG8, HG8	2.02	1.13	1.29	1.417	1.76
	51.1	28.7	32.85	36.0	44.7

* max. dimension

FOR MORE INFORMATION

corcom.com

TE Technical Support Center

Internet:	te.com/help
USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

Part numbers in this brochure are RoHS Compliant*, unless marked otherwise.

*as defined www.te.com/leadfree

te.com

© 2011 Tyco Electronics Corporation, a TE Connectivity Ltd. company. All Rights Reserved.
4-1773454-7 CIS JG 06/2011

TE Connectivity, TE connectivity (logo) and TE (logo) are trademarks. Other logos, product and/or company names might be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this brochure, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalog are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

