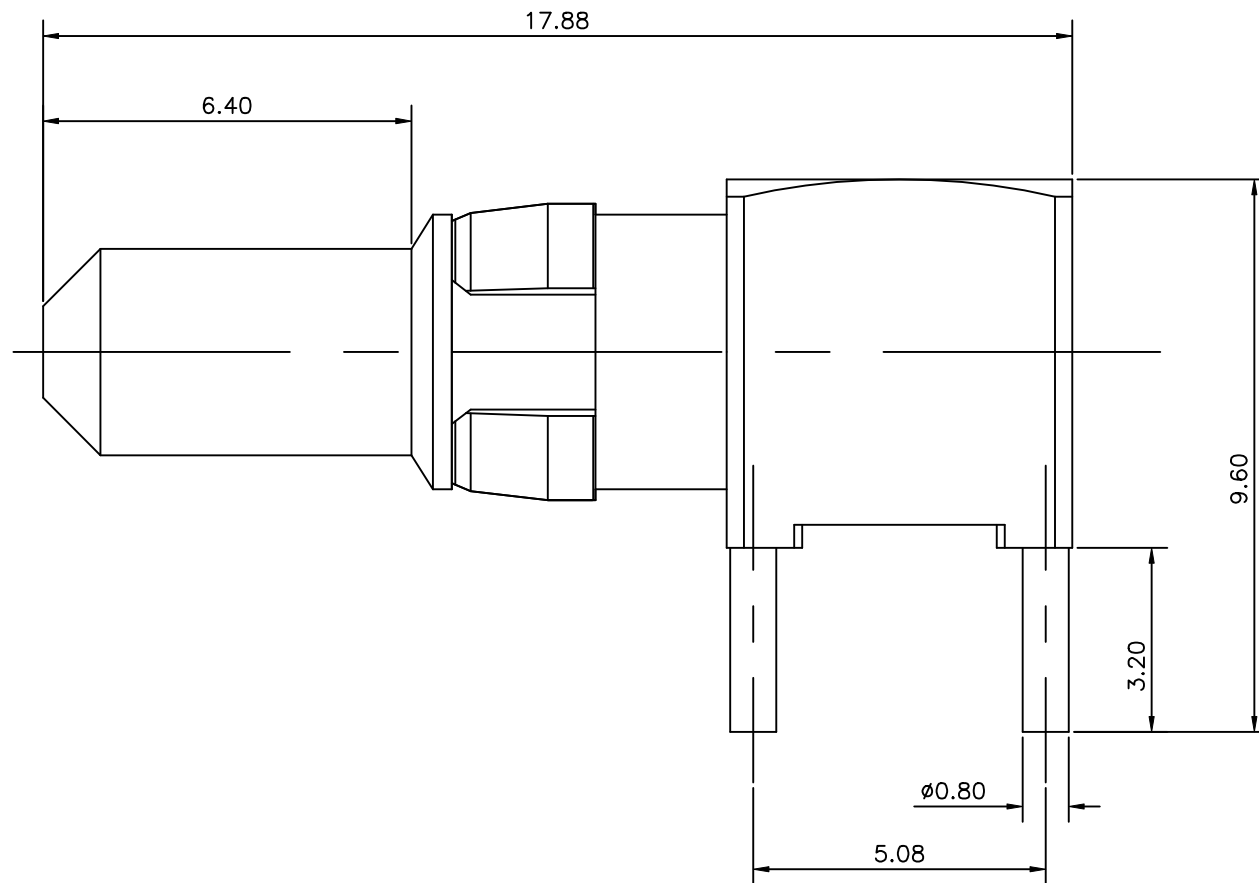


Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation écrite du Propriete de c FCI. Droits de reproduction FCI.

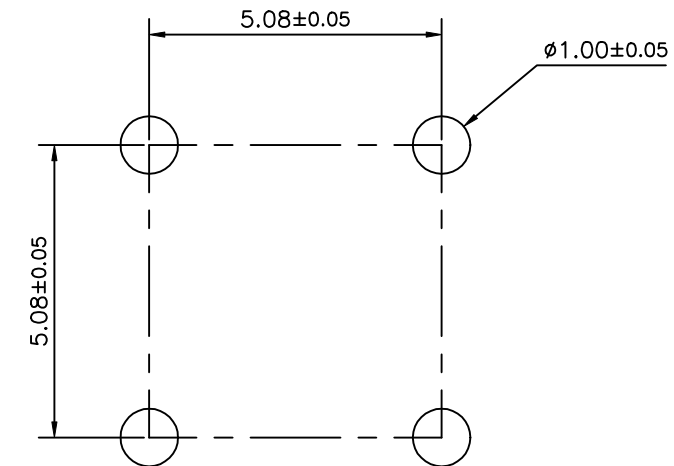
FCI

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.






NOTE

1. FOR MISSING INFORMATION SEE DRAWING BSC 201624 028
2. PLATED THROUGH HOLE INFORMATION SEE DRAWING BSA,201572,012
3. PERFORMANCE CHARACTERISTICS
 - CURRENT CAPACITY - 10 A (4 SOLDER TAGS)
 - INSERTION FORCE - 10N MAX.
 - WITHDRAWAL FORCE - 1.6 N MIN
 - CONTACT RESISTANCE : < 1mΩ UNDER 10 A



PCB LAY-OUT

ltr	Ecn no	Dr	date
A	I05-0028	MINI	25/02/2005

				<div>✓</div>		Tolerance LINEAR ±0.1 ANGULAR ±1°		<div>Projection</div> <div></div>		<div>MM</div> <div></div>		
Dr	Mini K Vandanath	25/02/2005		Product Family				MILLIPACS		Size A3	Scale	_____
Eng	Biju K Paul	25/02/2005		Spec ref								
Chr	Biju K Paul	25/02/2005		Material					ECN			
Appr	K Somasundaram	25/02/2005										
<div></div>		Title RIGH TANGLE MALE CONTACT (DIP SOLDER)						Dwg no BS, C , 201624 , 034			Rev. A	
C:\Engineering\Millipacs		Catalog no RM12PIE52---						CUSTOMER COPY			Sheet 1 of 1	