Fair-Rite Products Corp.
Your Signal Solution®

Miscellaneous Suppression Cores (2677006302)

Part Number: 2677006302

77 SHIELD BEAD

Explanation of Part Numbers:
– Digits 1 & 2 = Product Class
– Digits 3 & 4 = Material Grade

Fair-Rite has tooled several special core geometries in the 43 & 77 material for suppression of conducted EMI.

For any non-catalog suppression core design feel free to contact our customer service or application group for feasibility and availability.

The “C” dimension, the core length, can be modified to suit specific applications.

Weight: (g)

Dim	mm	mm tol	nominal inch	inch misc.
A	9.5	_	0.374	
B	4.75	_	0.193	
C	10.4	_	0.409	

Chart Legend
+ Test frequency
•Figures 3 & 4 tested in pairs

Typical Impedance (Ω)	
1 MHz	31
10 MHz+	48
25 MHz+	31


These suppression cores are controlled for impedance only. The minimum impedance is typically the listed impedance less 20%.


Single turns tests are performed on the E4990A Impedance Analyzer with the shortest practical wire

Downloaded from Arrow.com.

length.

Typical Impendance (Ω)	
1 MHz	25
10 MHz+	40
25 MHz+	33

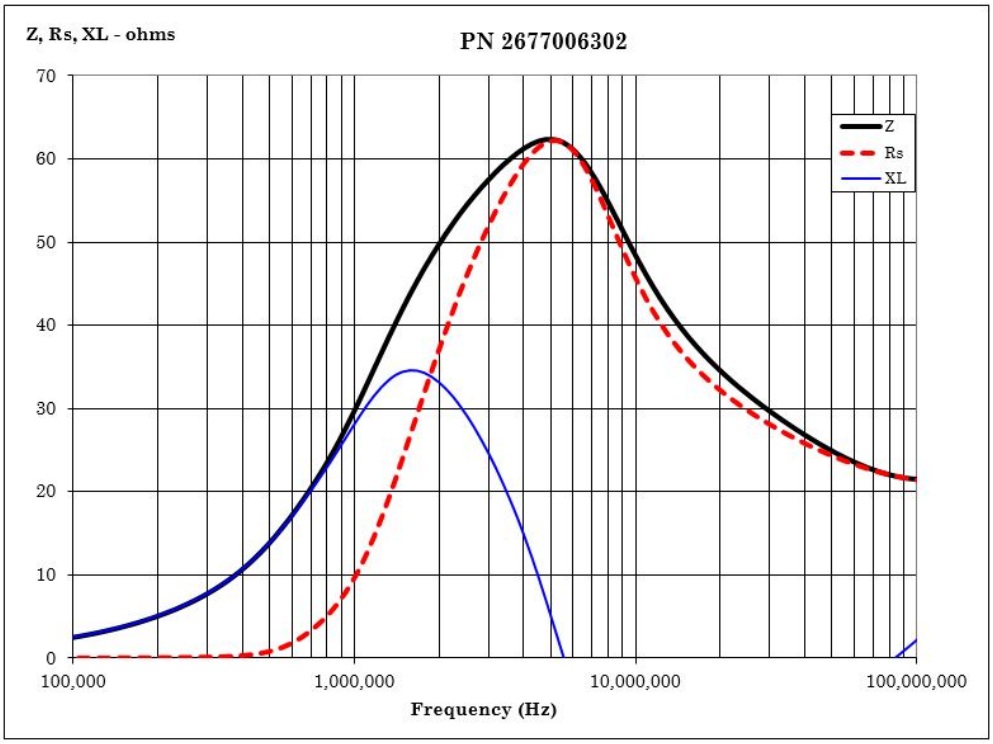

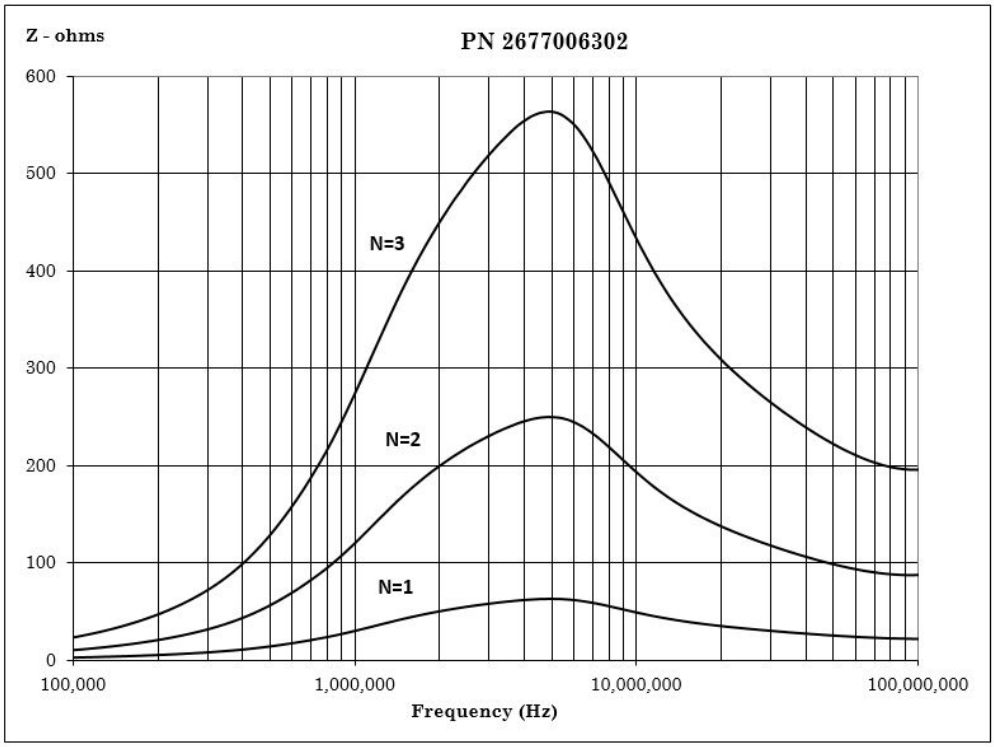

CSV Download

Downloaded from Arrow.com.

888-324-7748 • 845-895-2055 • Fax: 845-895-2629 • ferrites@fair-rite.com • www.fair-rite.com

Downloaded from Arrow.com.