





REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
0		RELEASED PER 063B-0007-03	29-JAN-03	KW	SR
A		RELEASED PER ECR-21-117154	03AUG2022	SKR	VS

1. PARTS COMPLY TO AMP SOLDERABILITY SPECIFICATION 109-11-3.



2. CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES, BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.

3. DIMENSIONS IN BRACKETS ARE IN INCHES.


4. DIMENSION SHOWN REPRESENT PRODUCT IN DRY CONDITION. ADDITIONAL 2% GROWTH DUE TO END USE LOCATION MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.

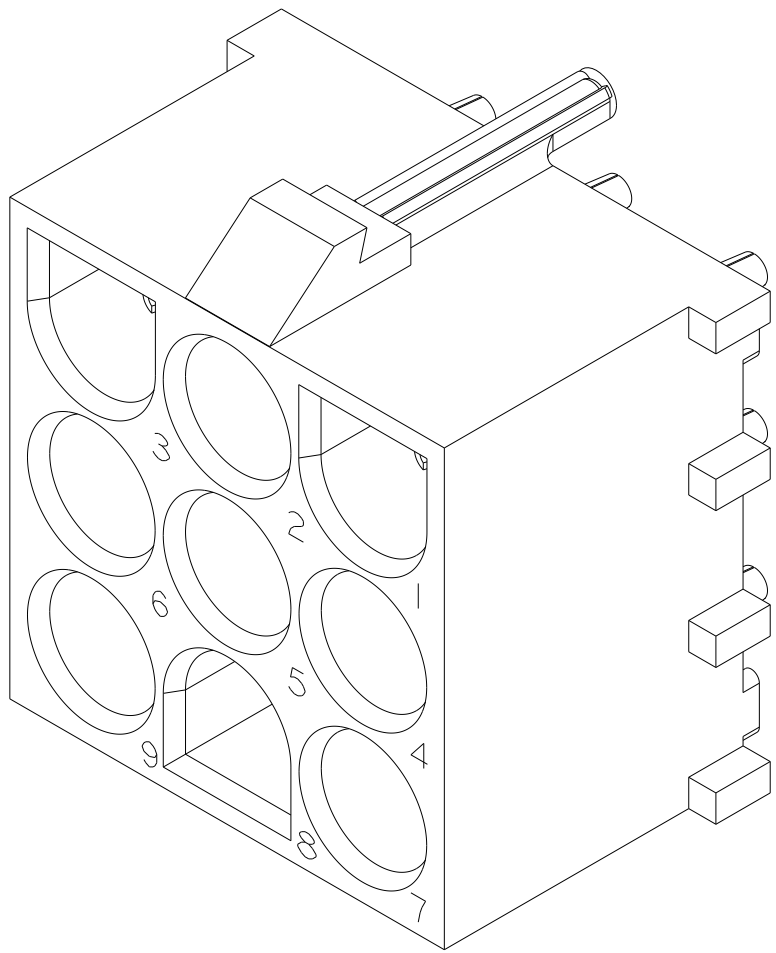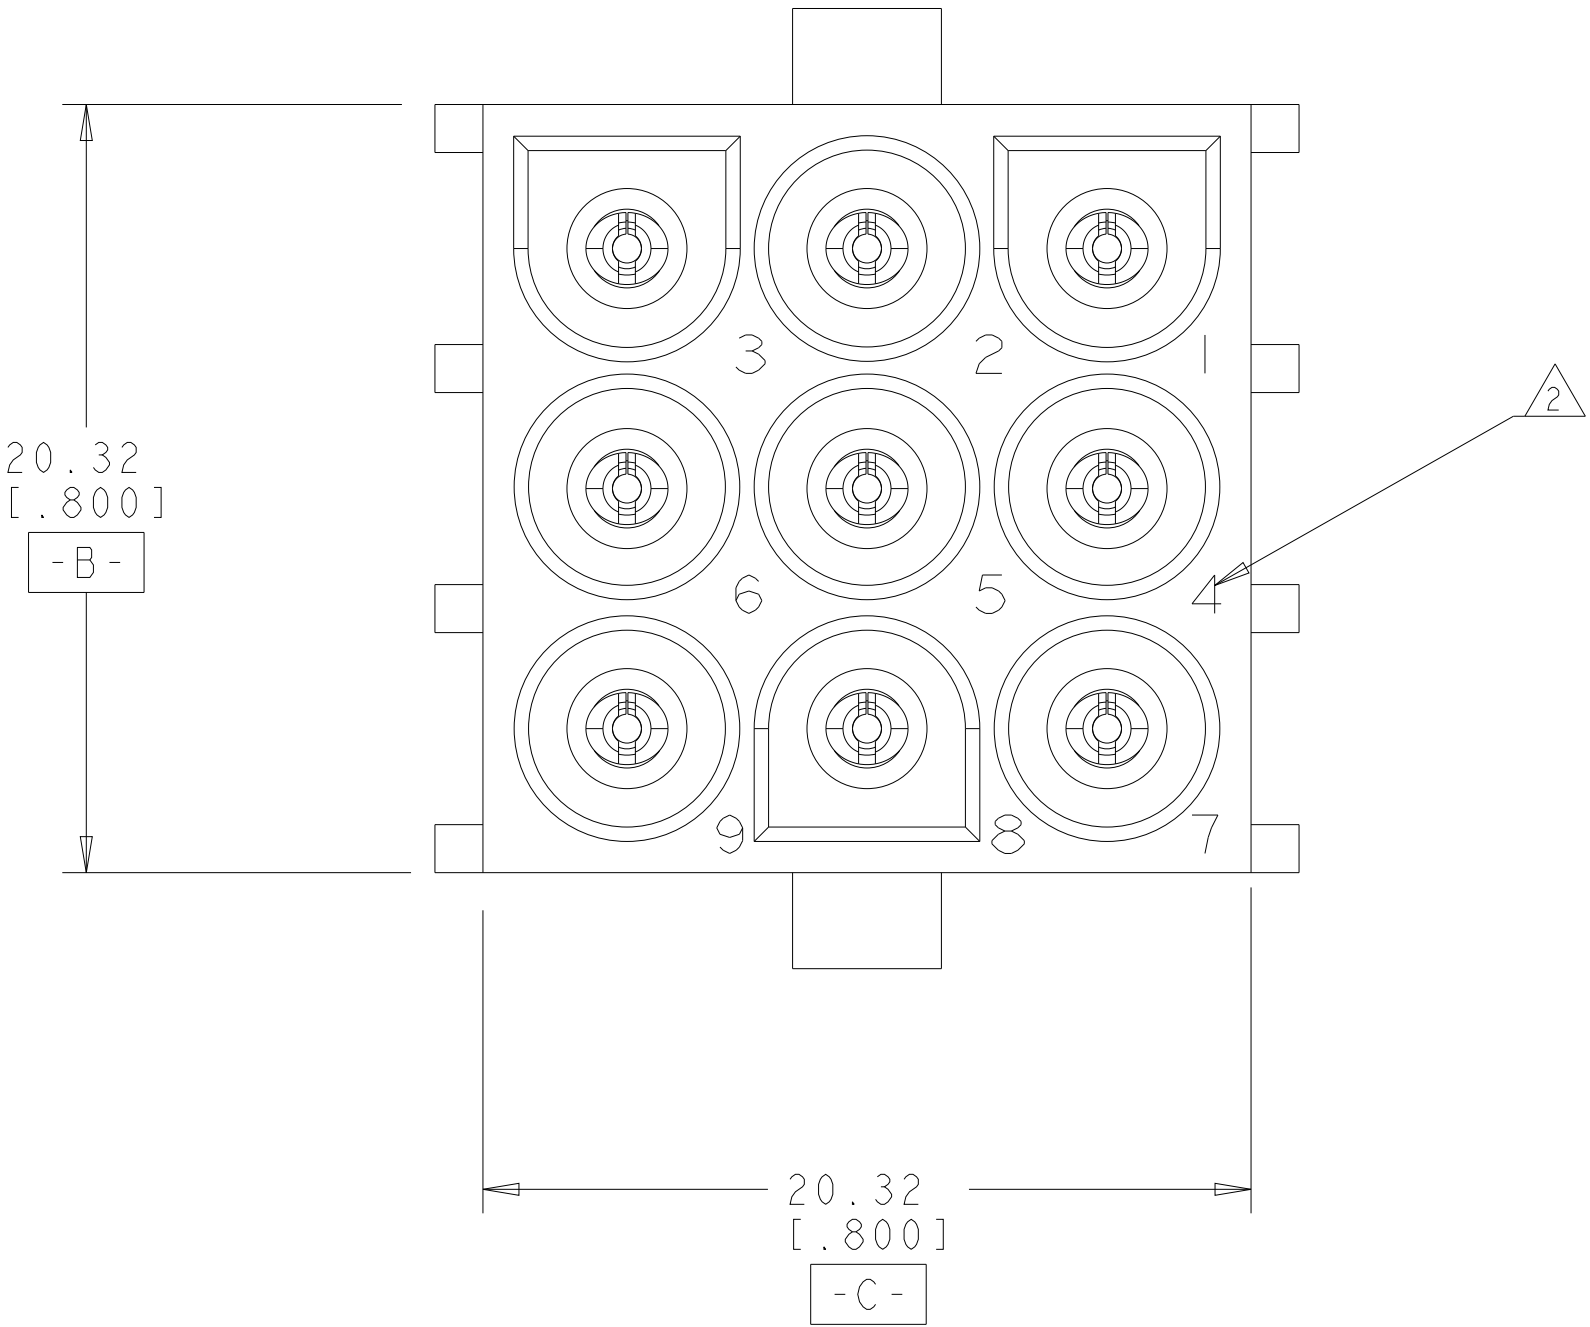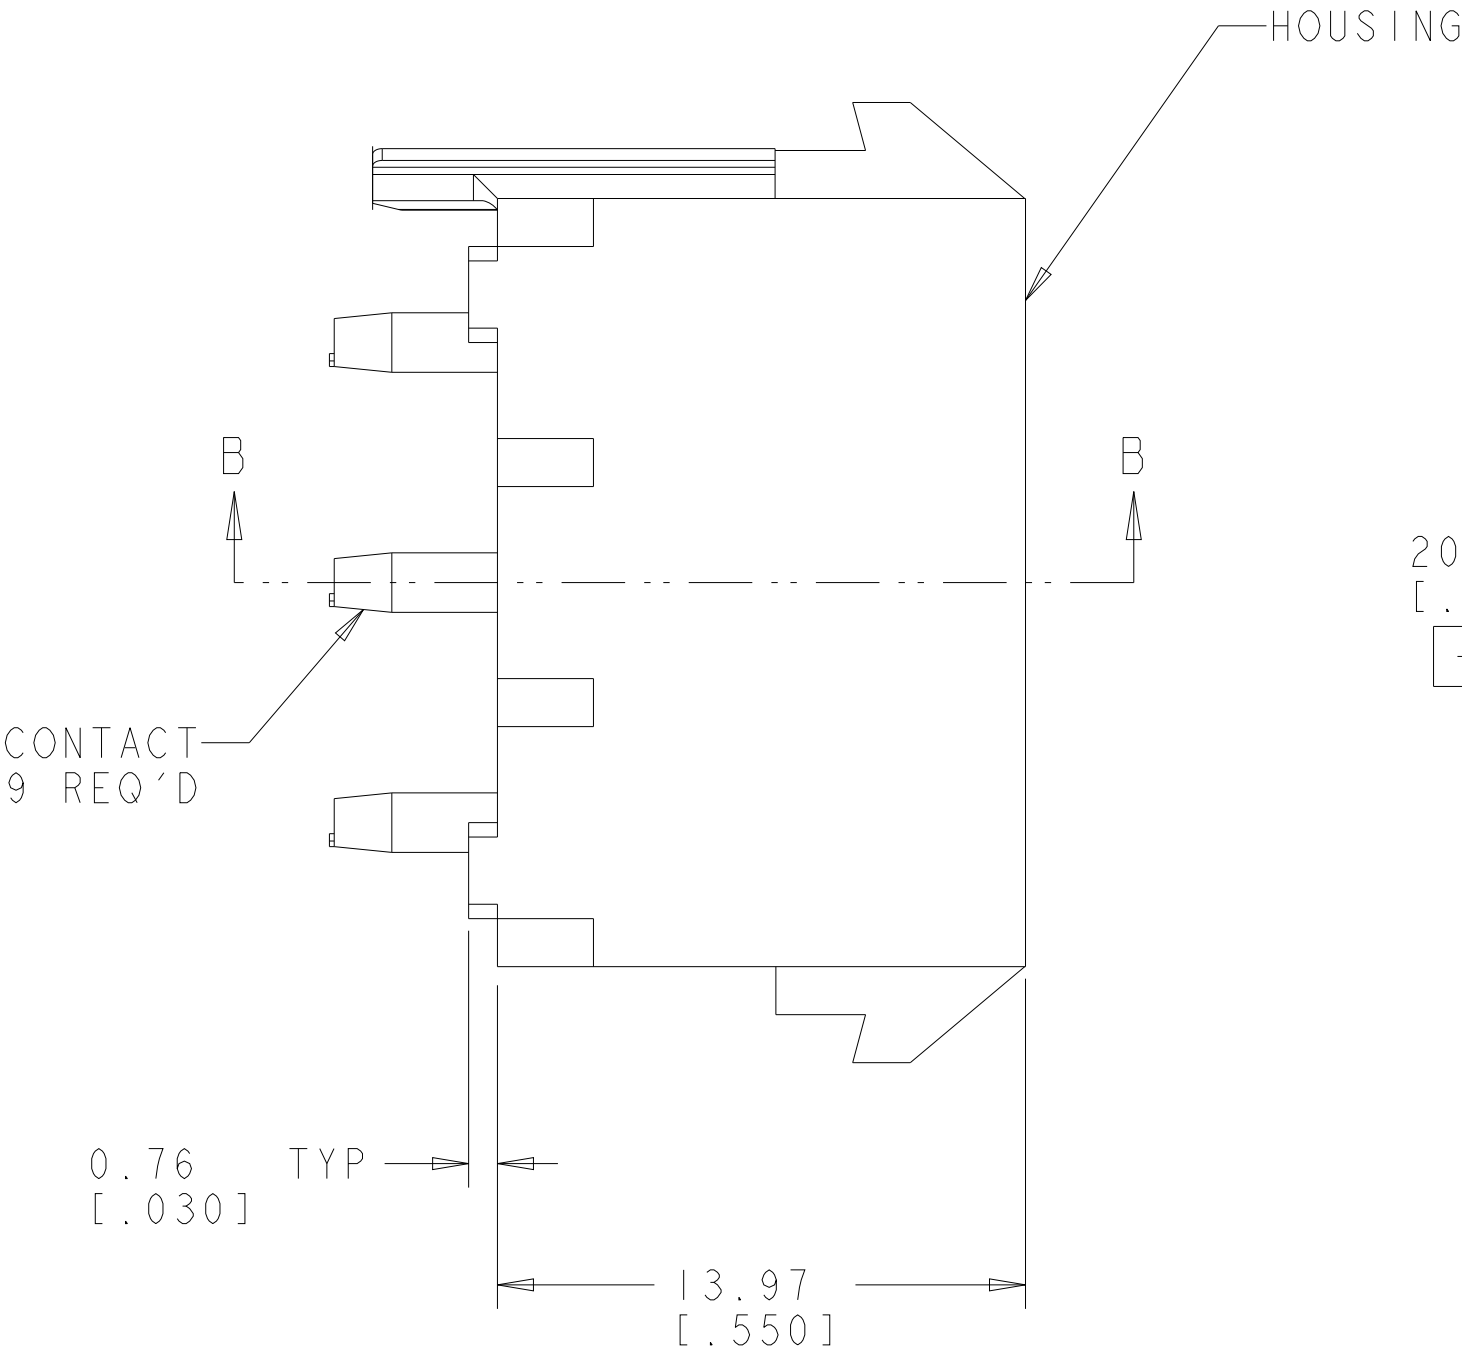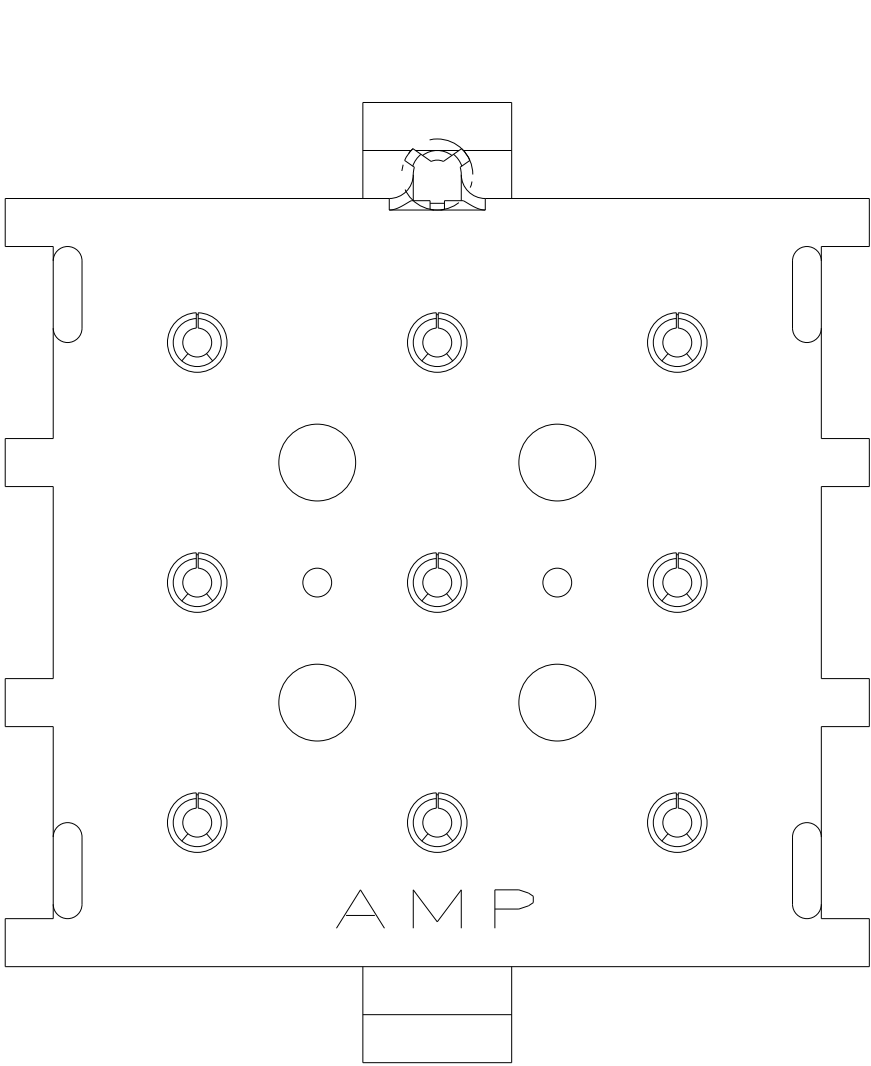

3 DIMENSIONAL MODEL
SCALE 4:1

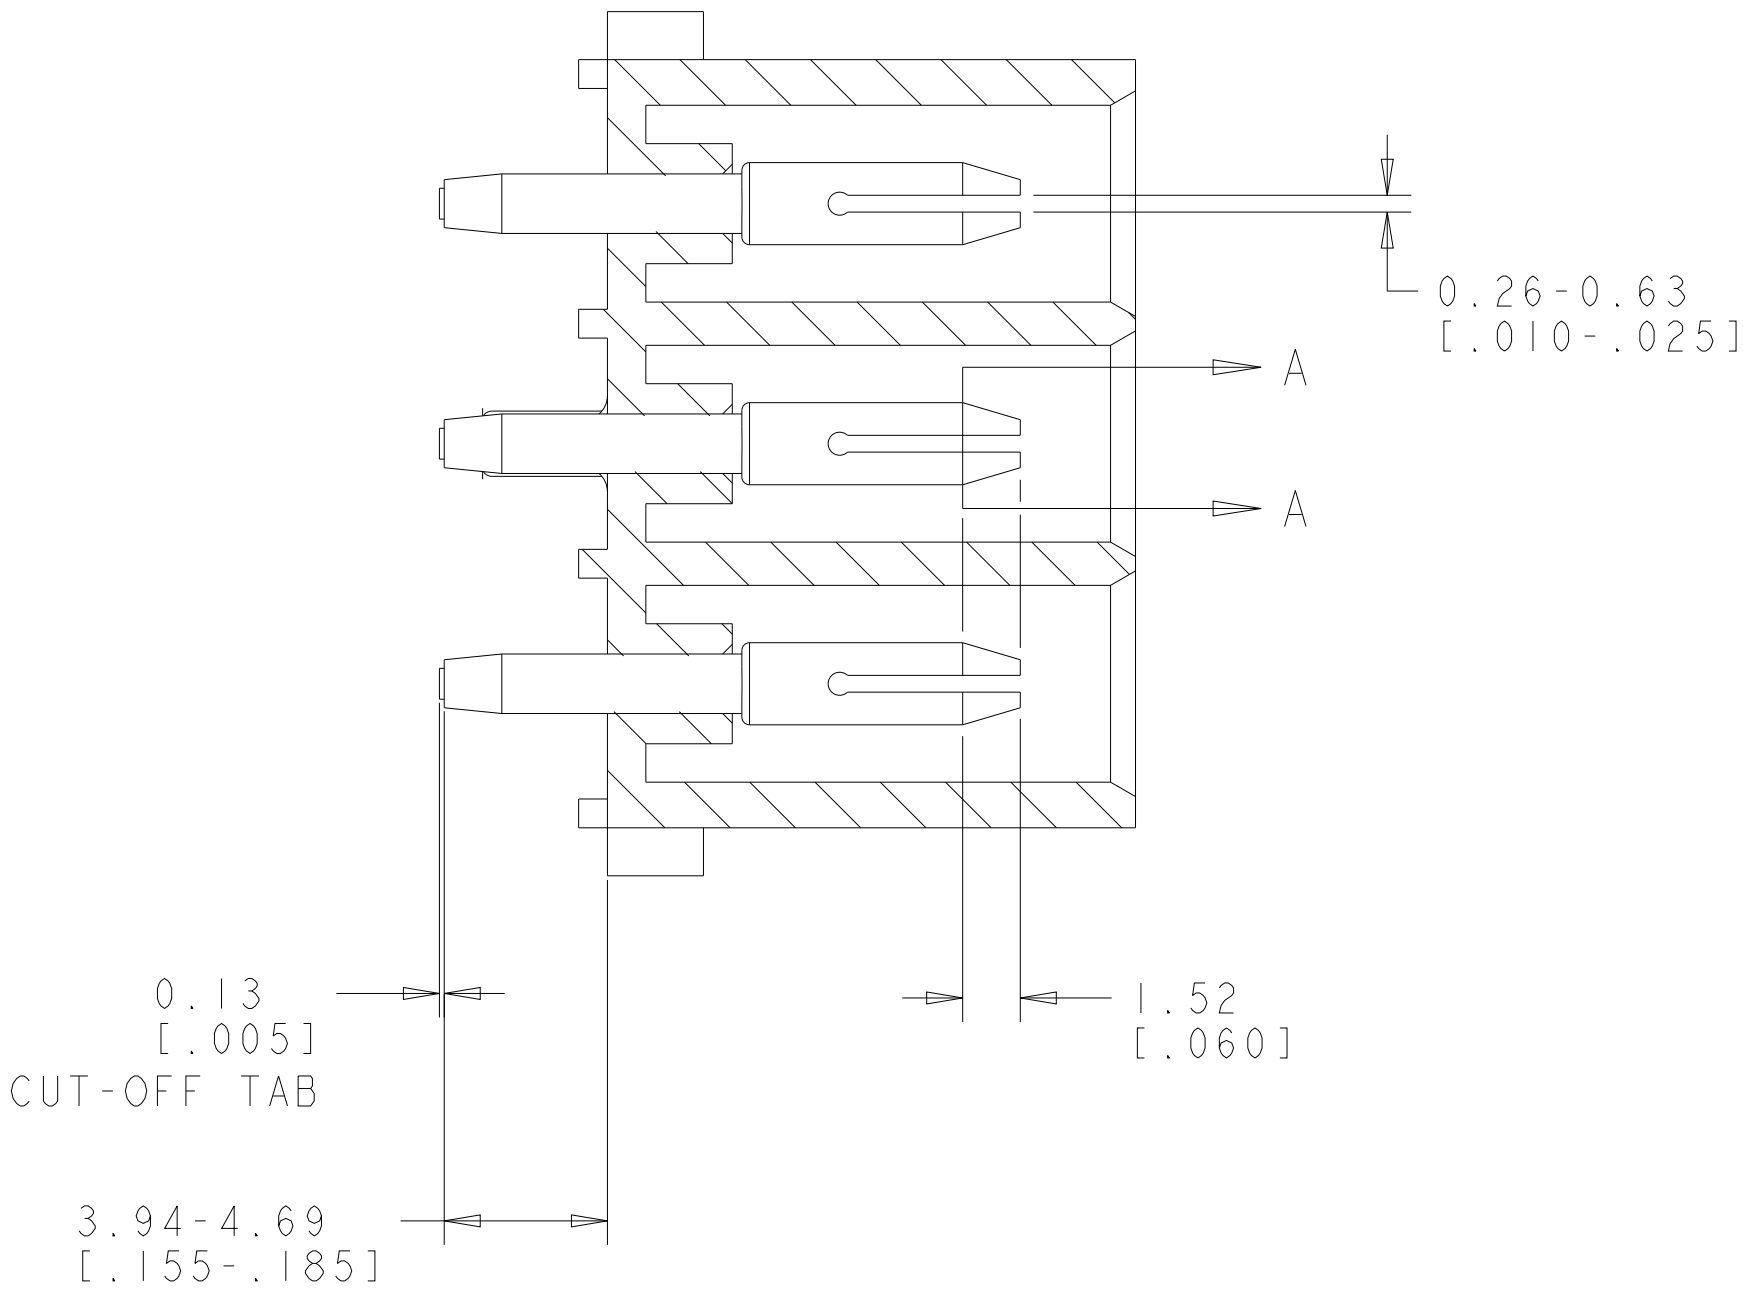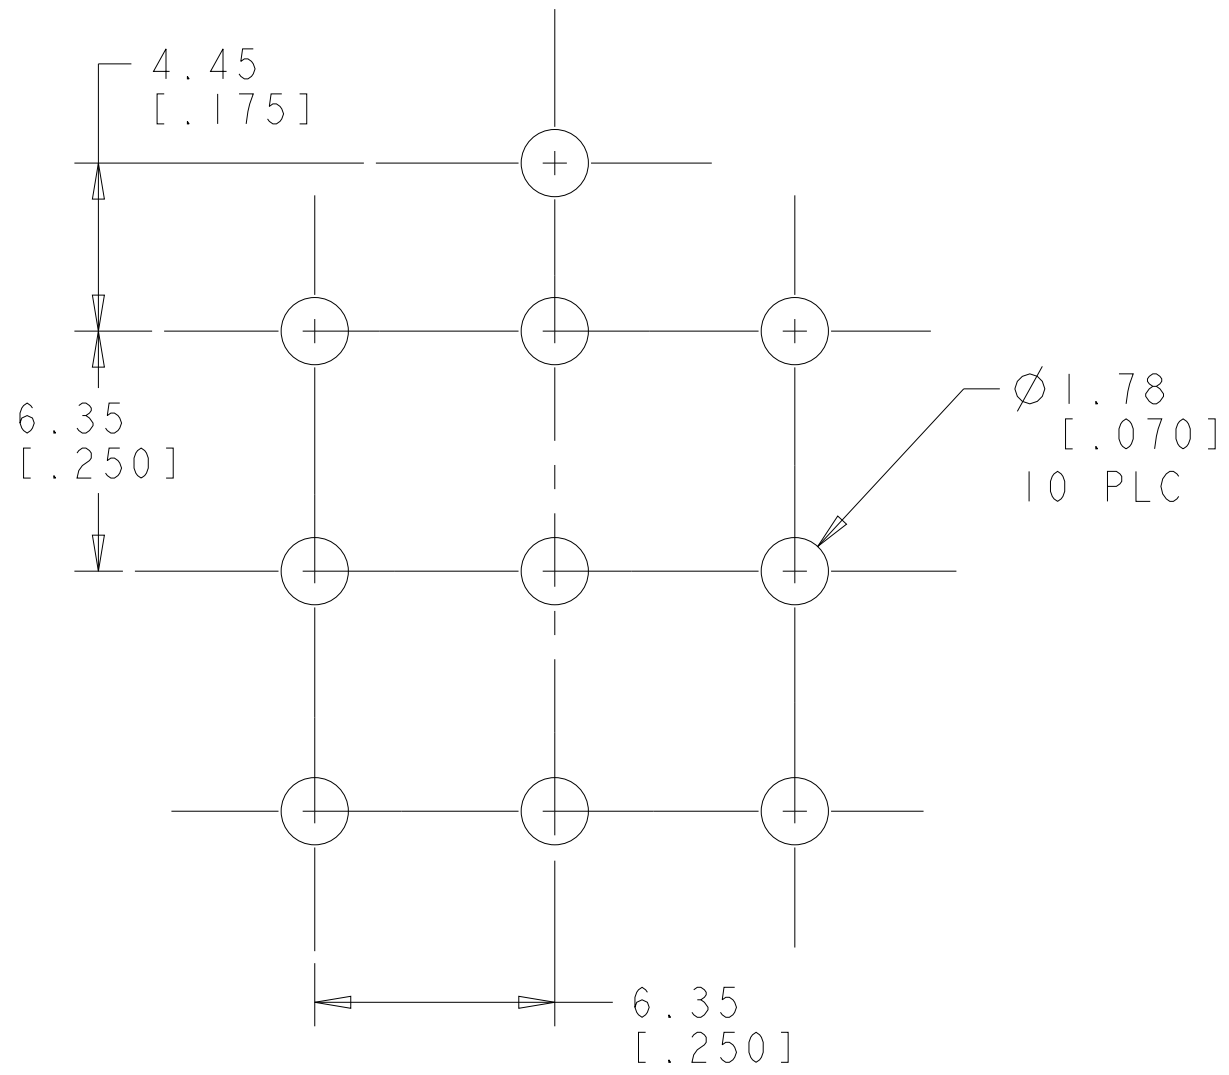


SECTION B-B

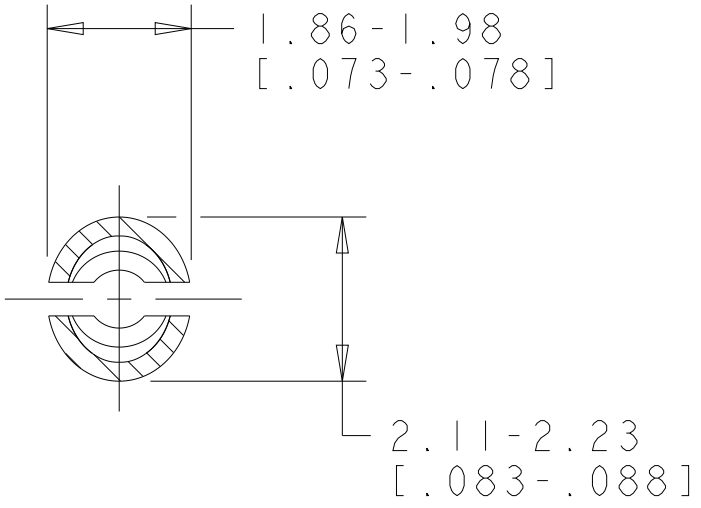

SECTION A-A
SCALE 10:1

PHOSPOR BRONZE, PRE-TIN		NYLON, UL94V-0, WHITE		794880-1	
PIN CONTACT MATERIAL AND FINISH		HOUSING MATERIAL AND COLOR		PART NUMBER	
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 29NOV2000 CHK S. RIDGILL 29NOV2000 APVD S. RIDGILL 29NOV2000		NAME	
DIMENSIONS: mm[INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	
0 PLC ± 1 PLC ± 2 PLC ±0.13(.005) 3 PLC ± 4 PLC ± ANGLES ±0°30'		APPLICATION SPEC		SIZE CAGE CODE DRAWING NO	
MATERIAL SEE TABLE		WEIGHT		RESTRICTED TO	
SEE TABLE		CUSTOMER DRAWING		A 00779C=794880	
SCALE 5:1		SHEET 1 OF 1		REV A	

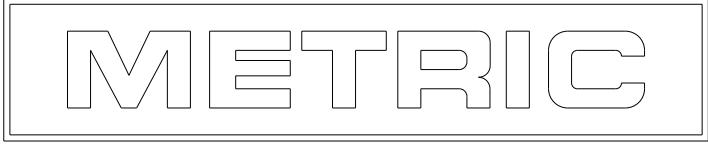

PIN HEADER ASSEMBLY,
POLARIZED, 9 CIRCUIT,
UNIVERSAL MATE-N-LOK™

RECOMMENDED MOUNTING HOLE PATTERN
FOR 1.57 [.062] THICK P.C. BOARD