
POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE, SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC INDUSTRIES ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	CK
2-17-04	NC	ECO 22012	RCW	ME	TK
12-29-04	A	ECO 23475		YK	

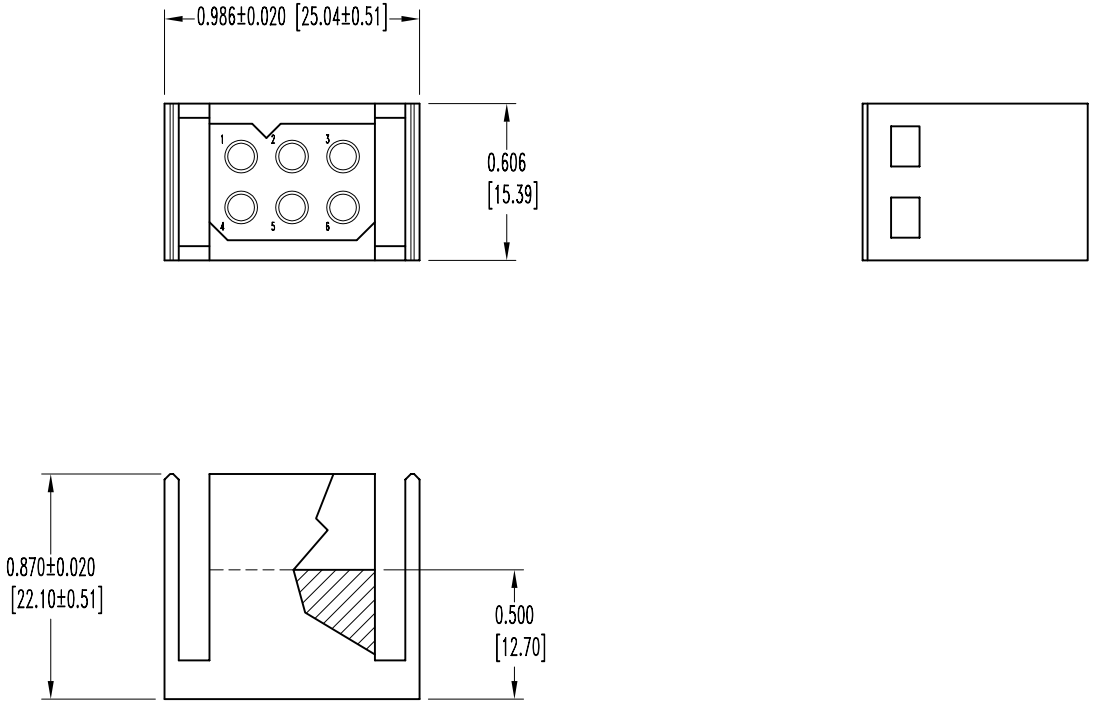

NOTES:
1. MATERIALS AND FINISHES:
   INSULATOR: GLASS-FILLED POLYESTER, UL 94V-0, BLUE COLOR.
2. ELECTRICAL CHARACTERISTICS:
   INSULATION RESISTANCE: 5 G OHMS PER IEC 512-2, TEST 3a, METHOD A.
   WORKING VOLTAGE: 600 VAC.
3. WORKING TEMPERATURE: -55°C TO +125°C.
4. DIMENSIONS ARE IN INCHES [MILLIMETERS].

POSITRONIC INDUSTRIES INC.
www.connectpositronic.com

DECIMAL TOL. ±0.015 [0.38]	PCS SERIES	SCALE N.T.S.	DRAWN BY M. ENEA
			APPROVED BY RCW
	TITLE PLB06M0000		
ANGULAR TOL. ±5°	DATE 2-17-04	DRAWING NUMBER SK5312	REV. A

Downloaded from Arrow.com.