

Product Data Sheet

DIN 41612 Straight-type spring-loaded connector, Type E,
Part No. 108-40076






Illustration similar



Parallel

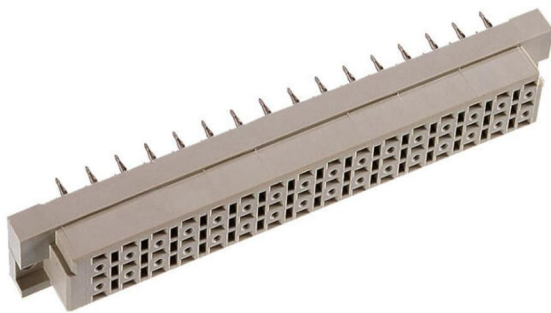

Perpendicular



Through Hole



Power



Rugged

- Connector length: 5.5/11 mm
- Number of poles: 48
- Hand Soldering
- Grade 2



» to product on www.ept.de



» to product group DIN 41612

Product Data Sheet

DIN 41612 Straight-type spring-loaded connector, Type E,
Part No. 108-40076



Technical Specifications

Basics

Specification	IEC 60603-2 (DIN 41612)
Performance Level	2
No. of Contacts	48
Termination Technology	Soldering Techniques
Termination Length	5.5 mm / 11 mm
Board-to-Board Distance	17.85 mm
Operating Temperature Range	-55°C to +125°C

Material

Insulator Material	Glass-fiber-reinforced PBT, UL 94 V-0
CTI value <i>IEC 60112</i>	200
Contact Material	copper alloy

Mechanical

Pitch	5.08 mm
Mating Force	60 N
Separating Force per Pin	> 0.15 N
Durability	400 insertion cycles

Electrical

Operational Current	5.6 A
Contact Resistance	15 mΩ
Clearance and Creepage	≥ 3.0 mm
Insulation Resistance	> 10 ⁶ MΩ
Test Voltage	1500 V

Processing

Soldering Temperature	up to 260°C
-----------------------	-------------

Approval / Compliance


UL file	E130314
Environment	RoHS compliant

Product Data Sheet

DIN 41612 Straight-type spring-loaded connector, Type E,
Part No. 108-40076



Derating Diagram

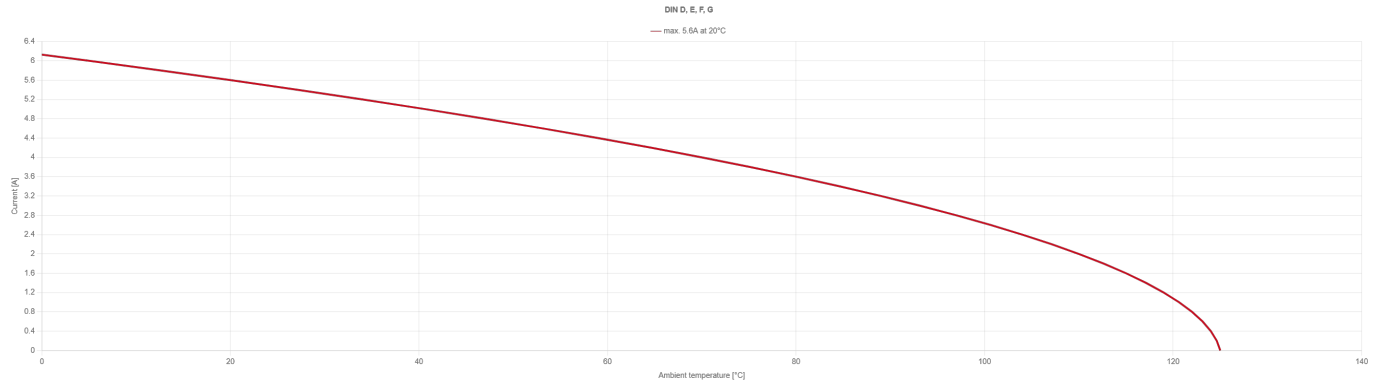

Product Data Sheet

DIN 41612 Straight-type spring-loaded connector, Type E,
Part No. 108-40076



Modifications

Available on request

- without mounting flange
- Special lengths for connections
- Grade I + III or custom
- Special configuration

Drawings

Component data in 2D and 3D format you can download here:

» [PDF](#)