

Part Number: 5678181221

78 POT CORE SET

Pot cores have found application in all types of inductive devices. The core configuration provides a high degree of self-shielding. It also facilitates gapping to enhance utility for a variety of magnetic designs.

Pot cores can be supplied with the center post gapped to a mechanical dimension or an A_L value.

[Catalog Drawing](#)

[3D Model](#)

Weight indicated is per pair or set.

Weight: 6.000 (g)

Dim	mm	mm tol	nominal inch	inch misc.
A	18	±0.40	0.709	—
B	5.35	±0.15	0.211	—
C	13.4	±0.40	0.528	—
D	3.8	±0.20	0.15	—
E	14.9	min	0.587	min
F	7.45	±0.15	0.293	—
G	4	±0.30	0.157	—
H	3.2	±0.20	0.126	—

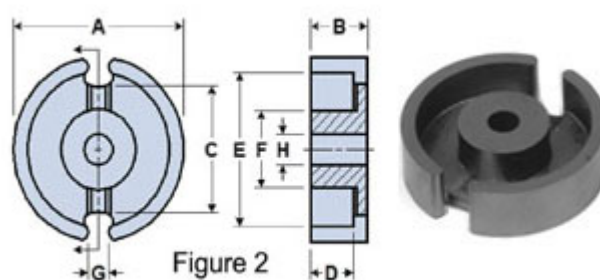


Chart Legend

$\Sigma l/A$: Core Constant, l_e : Effective Path Length, A_e : Effective Cross-Sectional Area, V_e : Effective Core Volume

A_L : Inductance Factor 

Explanation of Part Numbers: Digits 1 & 2 = product class and 3 & 4 = material grade.

Electrical Properties	
A_L (nH)	2600 ±25%
A_e (cm ²)	0.43
$\Sigma l/A$ (cm ⁻¹)	6

Electrical Properties	
$l_e(\text{cm})$	2.59
$V_e(\text{cm}^3)$	1.12
$A_{\min}(\text{cm}^2)$	0.36

A_L value is measured at 1 kHz, $B < 10$ gauss.

Fair-Rite Products Corp. • One Commercial Row, Wallkill, New York 12589-0288
888-324-7748 • 845-895-2055 • Fax: 845-895-2629 • ferrites@fair-rite.com • www.fair-rite.com