


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND IT'S SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE, SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.


SK3784

DATE	REV	REVISION RECORD	APP	DR	CK
6-6-01	NC	ECO 17860	RCW	ME	JG
3-12-10	A	ECO 32233	COLE	ME	SY

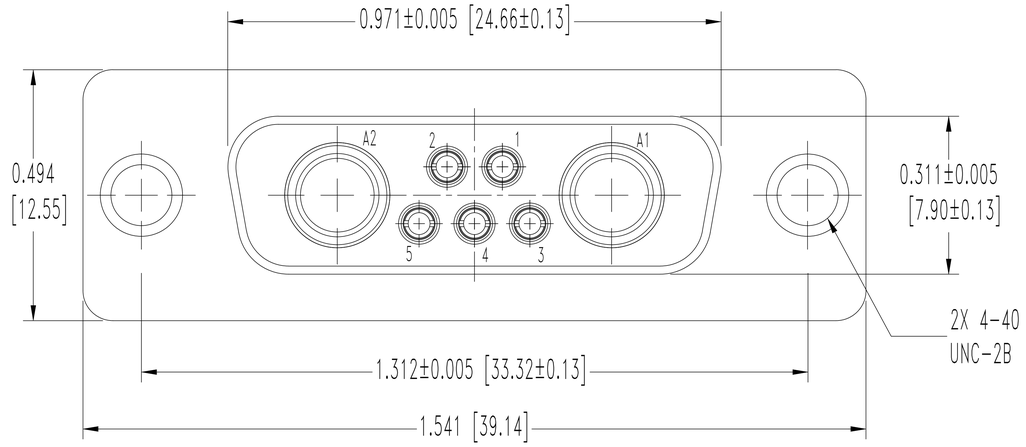

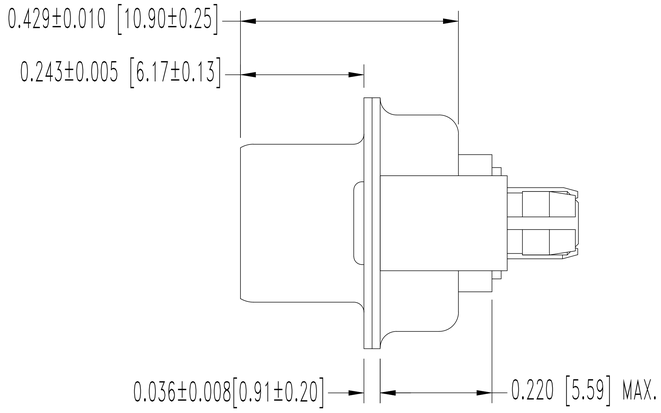

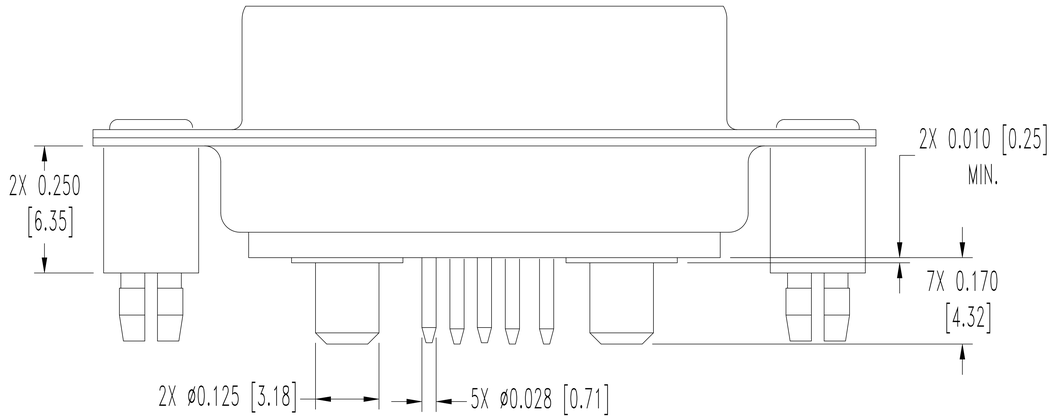

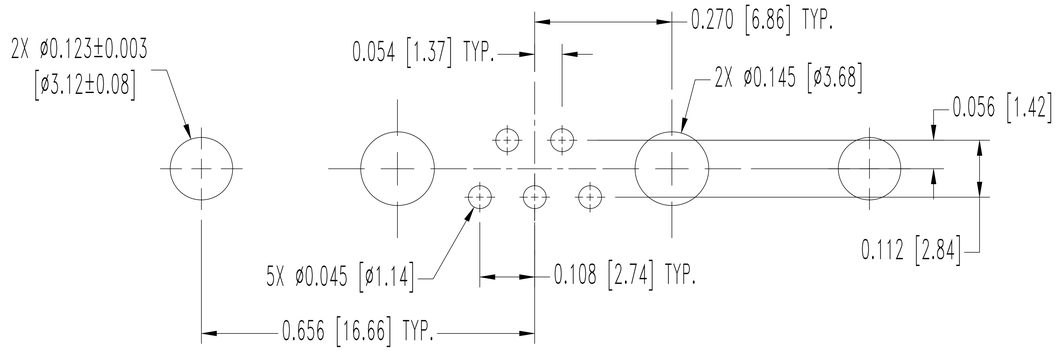

CONTACT HOLE PATTERN

NOTES:
1. MATERIALS AND FINISHES:
   INSULATOR: GLASS FILLED POLYESTER PER ASTM D5927, UL 94V-0, BLUE COLOR.
   SIGNAL CONTACTS: PRECISION MACHINED HIGH TENSILE PHOSPHOR BRONZE, GOLD FLASH OVER NICKEL PLATE.
   POWER CONTACTS: MACHINED OF HIGH CONDUCTIVITY COPPER ALLOY, GOLD FLASH OVER NICKEL PLATE.
   SHELLS: STEEL WITH TIN PLATE.
   PUSH FASTENERS: PHOSPHOR BRONZE WITH TIN PLATE.
2. DETAILED PRODUCT, ELECTRICAL, AND MECHANICAL INFORMATION IS AVAILABLE IN THE LATEST CBD PRODUCT PUBLICATION. VISIT CONNECTPOSITRONIC.COM/PRODUCTS/1/STANDARDDENSITYCOMBO-D/ OR CONNECTPOSITRONIC.COM.
3. DIMENSIONS ARE IN INCHES [MILLIMETERS].

POSITRONIC INDUSTRIES INC.
SPRINGFIELD, MISSOURI 65801

DECIMAL TOL. ±0.015 [0.38]
WF # 3717
ANGULAR TOL. ±5°

CBD SERIES
SCALE N.T.S.
DRAWN BY M. ENEA
APPROVED BY RCW

TITLE
CBD7W2F37S600X

DATE 6-6-01
DRAWING NUMBER SK3784
REV. A

Downloaded from Arrow.com