
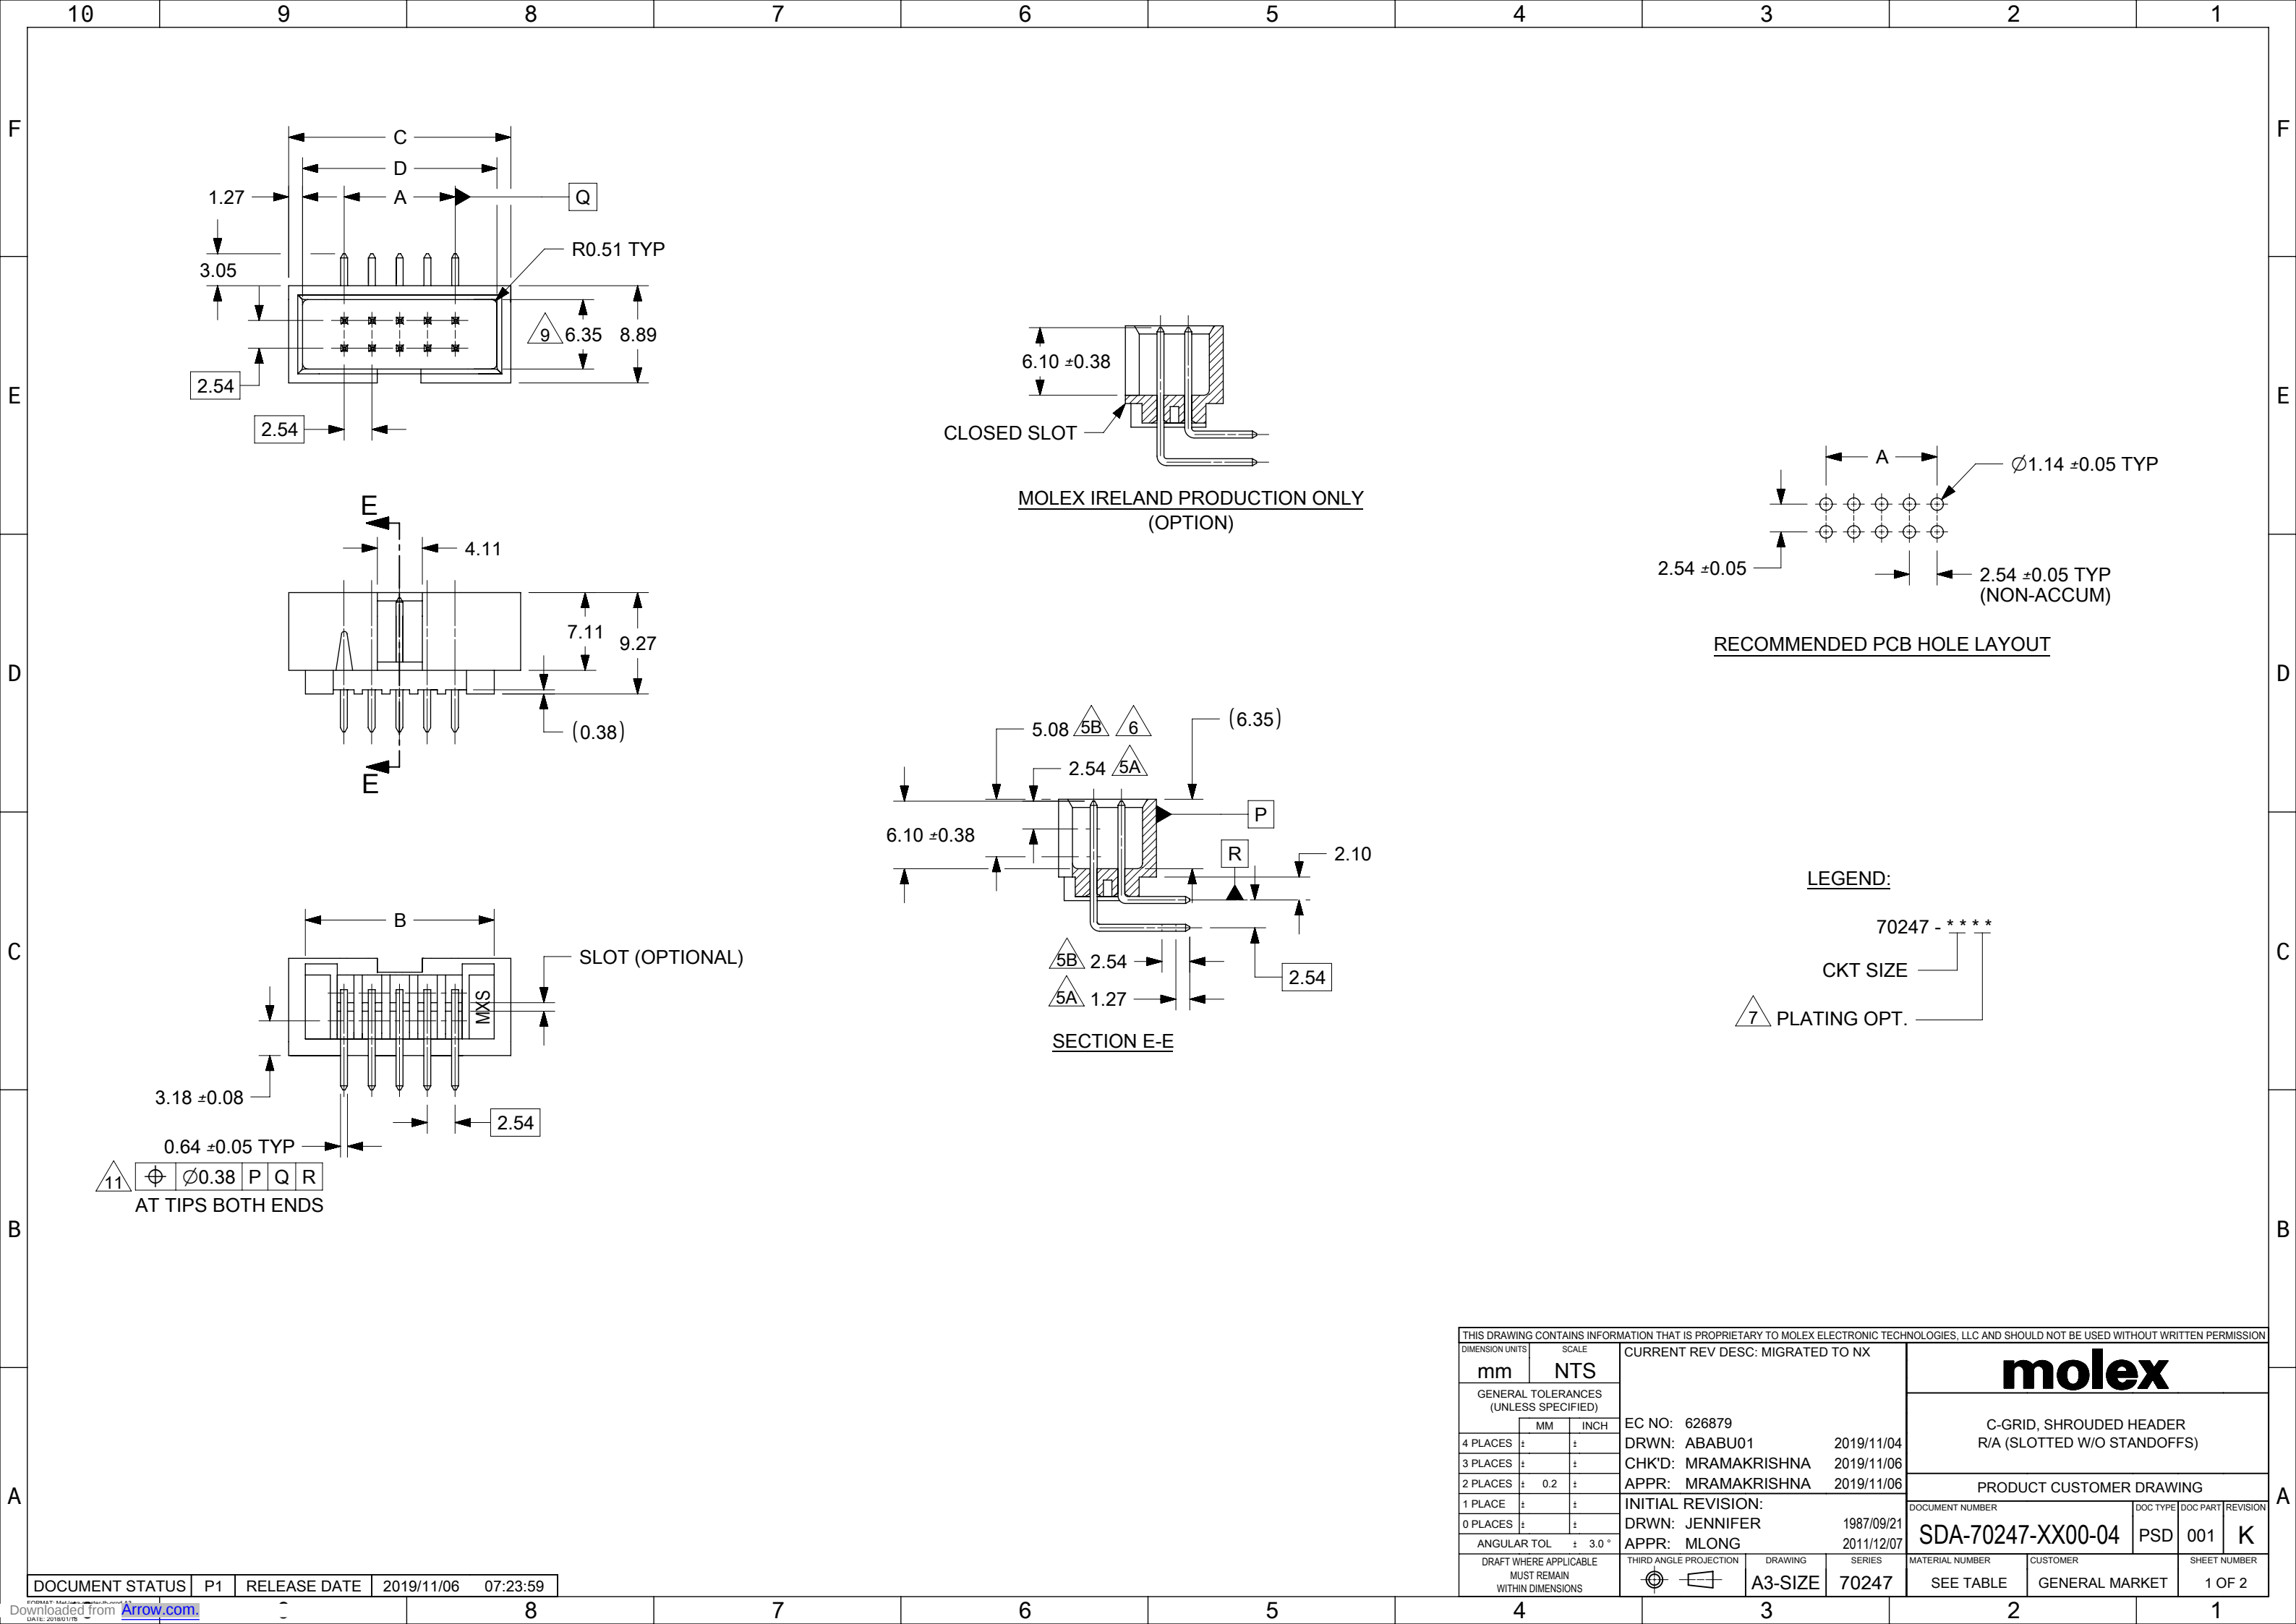




11 $\varnothing$ $\varnothing 0.38$ P Q R
AT TIPS BOTH ENDS

CLOSED SLOT
MOLEX IRELAND PRODUCTION ONLY
(OPTION)

LEGEND:
70247 - * * * *
CKT SIZE
7 PLATING OPT.

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION												
DIMENSION UNITS		SCALE		CURRENT REV DESC: MIGRATED TO NX			molex					
mm		NTS										
GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 626879 DRWN: ABABU01 2019/11/04 CHK'D: MRAMAKRISHNA 2019/11/06 APPR: MRAMAKRISHNA 2019/11/06 INITIAL REVISION: DRWN: JENNIFER 1987/09/21 APPR: MLONG 2011/12/07			C-GRID, SHROUDED HEADER R/A (SLOTTED W/O STANDOFFS)					
	MM	INCH					PRODUCT CUSTOMER DRAWING					
4 PLACES	±	±										
3 PLACES	±	±					DOCUMENT NUMBER SDA-70247-XX00-04			DOC TYPE PSD	DOC PART 001	REVISION K
2 PLACES	±	0.2	±									
1 PLACE	±	±										
0 PLACES	±	±		MATERIAL NUMBER SEE TABLE			CUSTOMER GENERAL MARKET		SHEET NUMBER 1 OF 2			
ANGULAR TOL ± 3.0 °												
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION 		DRAWING A3-SIZE	SERIES 70247					

DOCUMENT STATUS	P1	RELEASE DATE	2019/11/06	07:23:59
-----------------	----	--------------	------------	----------

10	9	8	7	6	5	4		3	2	1																																																																																															
F	NOTES: 1. PIN PUSHOUT FORCE (.9072KG)/2LBS MIN. 2. PIN SOLDERABILITY PER MOLEX SPEC. ES-152. 3. PRODUCT SPEC: PS-70246-100 APPLIES. 4. WAFER TO BE FLAT WITHIN .003 MM/MM. 5. DIMENSIONS FOR PLATING LOCATION: 5A MEASURE POINT FOR THICKNESS 5B MINIMUM COVERAGE 6 GOLD END OF PIN UNLESS OVERALL PLATED. 7 FINISH: - 51 : 15 MICRO INCHES MIN GOLD PLATE ON CONTACT AND 75 MICRO INCHES MIN TIN PLATE ON SOLDERTAIL BOTH OVER 50 MICRO INCHES MIN NICKEL OVERALL. - 52 : 30 MICRO INCHES MIN GOLD PLATE ON CONTACT AND 75 MICRO INCHES MIN TIN PLATE ON SOLDERTAIL BOTH OVER 50 MICRO INCHES MIN NICKEL OVERALL. - 54 : 5 MICRO INCHES MIN GOLD PLATE ON CONTACT AND 75 MICRO INCHES MIN TIN PLATE ON SOLDERTAIL. BOTH OVER 50 MICRO INCHES MIN NICKEL OVERALL. 8 CHECK WITH SALES OFFICE FOR AVAILABILITY. 9 DIM AT THE CENTRE OF THE SHROUDED WALL SHALL BE 5.91MM MIN. THIS SPEC IS VALID FOR ALL CKT SIZE. 10. MATERIAL: HSG: PBT, GLASS FILLED, UL94V-0, COLOUR: BLACK PIN: 0.64MM SQ. PIN PHOSPHOR BRONZE. 11 SOLDERTAIL POSITION TOLERANCE TO BE GAUGED. 12. PACKAGING SPECIFICATION: PK-87835-001.						PART 8 NUMBER	CKT SIZE	DIM A	DIM B	DIM C	DIM D																																																																																													
							70247-08**	08	7.62	14.73	17.78	15.24																																																																																													
							70247-10**	10	10.16	17.27	20.32	17.78																																																																																													
							70247-12**	12	12.70	19.81	22.86	20.32																																																																																													
							70247-14**	14	15.24	22.35	25.40	22.86																																																																																													
70247-16**							16	17.78	24.89	27.94	25.40																																																																																														
70247-20**							20	22.86	29.97	33.02	30.48																																																																																														
70247-24**							24	27.94	35.05	38.10	35.56																																																																																														
70247-26**							26	30.48	37.59	40.64	38.10																																																																																														
70247-30**							30	35.56	42.67	45.72	43.18																																																																																														
70247-34**							34	40.64	47.75	50.80	48.26																																																																																														
70247-40**							40	48.26	55.37	58.42	55.88																																																																																														
70247-44**							44	53.34	60.45	63.50	60.96																																																																																														
70247-48**							48	58.42	65.53	68.58	66.04																																																																																														
70247-50**							50	60.96	68.07	71.12	68.58																																																																																														
70247-56**							56	68.58	75.69	78.74	76.20																																																																																														
70247-60**							60	73.66	80.77	83.82	81.28																																																																																														
70247-64**							64	78.74	85.85	88.90	86.36																																																																																														
70247-72**	72	88.90	96.01	99.06	96.52																																																																																																				
E	NOTES: 1. PIN PUSHOUT FORCE (.9072KG)/2LBS MIN. 2. PIN SOLDERABILITY PER MOLEX SPEC. ES-152. 3. PRODUCT SPEC: PS-70246-100 APPLIES. 4. WAFER TO BE FLAT WITHIN .003 MM/MM. 5. DIMENSIONS FOR PLATING LOCATION: 5A MEASURE POINT FOR THICKNESS 5B MINIMUM COVERAGE 6 GOLD END OF PIN UNLESS OVERALL PLATED. 7 FINISH: - 51 : 15 MICRO INCHES MIN GOLD PLATE ON CONTACT AND 75 MICRO INCHES MIN TIN PLATE ON SOLDERTAIL BOTH OVER 50 MICRO INCHES MIN NICKEL OVERALL. - 52 : 30 MICRO INCHES MIN GOLD PLATE ON CONTACT AND 75 MICRO INCHES MIN TIN PLATE ON SOLDERTAIL BOTH OVER 50 MICRO INCHES MIN NICKEL OVERALL. - 54 : 5 MICRO INCHES MIN GOLD PLATE ON CONTACT AND 75 MICRO INCHES MIN TIN PLATE ON SOLDERTAIL. BOTH OVER 50 MICRO INCHES MIN NICKEL OVERALL. 8 CHECK WITH SALES OFFICE FOR AVAILABILITY. 9 DIM AT THE CENTRE OF THE SHROUDED WALL SHALL BE 5.91MM MIN. THIS SPEC IS VALID FOR ALL CKT SIZE. 10. MATERIAL: HSG: PBT, GLASS FILLED, UL94V-0, COLOUR: BLACK PIN: 0.64MM SQ. PIN PHOSPHOR BRONZE. 11 SOLDERTAIL POSITION TOLERANCE TO BE GAUGED. 12. PACKAGING SPECIFICATION: PK-87835-001.						PART 8 NUMBER	CKT SIZE	DIM A	DIM B	DIM C	DIM D																																																																																													
							70247-08**	08	7.62	14.73	17.78	15.24																																																																																													
							70247-10**	10	10.16	17.27	20.32	17.78																																																																																													
							70247-12**	12	12.70	19.81	22.86	20.32																																																																																													
							70247-14**	14	15.24	22.35	25.40	22.86																																																																																													
70247-16**							16	17.78	24.89	27.94	25.40																																																																																														
70247-20**							20	22.86	29.97	33.02	30.48																																																																																														
70247-24**							24	27.94	35.05	38.10	35.56																																																																																														
70247-26**							26	30.48	37.59	40.64	38.10																																																																																														
70247-30**							30	35.56	42.67	45.72	43.18																																																																																														
70247-34**							34	40.64	47.75	50.80	48.26																																																																																														
70247-40**							40	48.26	55.37	58.42	55.88																																																																																														
70247-44**							44	53.34	60.45	63.50	60.96																																																																																														
70247-48**							48	58.42	65.53	68.58	66.04																																																																																														
70247-50**							50	60.96	68.07	71.12	68.58																																																																																														
70247-56**							56	68.58	75.69	78.74	76.20																																																																																														
70247-60**							60	73.66	80.77	83.82	81.28																																																																																														
70247-64**							64	78.74	85.85	88.90	86.36																																																																																														
70247-72**	72	88.90	96.01	99.06	96.52																																																																																																				
D	NOTES: 1. PIN PUSHOUT FORCE (.9072KG)/2LBS MIN. 2. PIN SOLDERABILITY PER MOLEX SPEC. ES-152. 3. PRODUCT SPEC: PS-70246-100 APPLIES. 4. WAFER TO BE FLAT WITHIN .003 MM/MM. 5. DIMENSIONS FOR PLATING LOCATION: 5A MEASURE POINT FOR THICKNESS 5B MINIMUM COVERAGE 6 GOLD END OF PIN UNLESS OVERALL PLATED. 7 FINISH: - 51 : 15 MICRO INCHES MIN GOLD PLATE ON CONTACT AND 75 MICRO INCHES MIN TIN PLATE ON SOLDERTAIL BOTH OVER 50 MICRO INCHES MIN NICKEL OVERALL. - 52 : 30 MICRO INCHES MIN GOLD PLATE ON CONTACT AND 75 MICRO INCHES MIN TIN PLATE ON SOLDERTAIL BOTH OVER 50 MICRO INCHES MIN NICKEL OVERALL. - 54 : 5 MICRO INCHES MIN GOLD PLATE ON CONTACT AND 75 MICRO INCHES MIN TIN PLATE ON SOLDERTAIL. BOTH OVER 50 MICRO INCHES MIN NICKEL OVERALL. 8 CHECK WITH SALES OFFICE FOR AVAILABILITY. 9 DIM AT THE CENTRE OF THE SHROUDED WALL SHALL BE 5.91MM MIN. THIS SPEC IS VALID FOR ALL CKT SIZE. 10. MATERIAL: HSG: PBT, GLASS FILLED, UL94V-0, COLOUR: BLACK PIN: 0.64MM SQ. PIN PHOSPHOR BRONZE. 11 SOLDERTAIL POSITION TOLERANCE TO BE GAUGED. 12. PACKAGING SPECIFICATION: PK-87835-001.						PART 8 NUMBER	CKT SIZE	DIM A	DIM B	DIM C	DIM D																																																																																													
							70247-08**	08	7.62	14.73	17.78	15.24																																																																																													
							70247-10**	10	10.16	17.27	20.32	17.78																																																																																													
							70247-12**	12	12.70	19.81	22.86	20.32																																																																																													
							70247-14**	14	15.24	22.35	25.40	22.86																																																																																													
70247-16**							16	17.78	24.89	27.94	25.40																																																																																														
70247-20**							20	22.86	29.97	33.02	30.48																																																																																														
70247-24**							24	27.94	35.05	38.10	35.56																																																																																														
70247-26**							26	30.48	37.59	40.64	38.10																																																																																														
70247-30**							30	35.56	42.67	45.72	43.18																																																																																														
70247-34**							34	40.64	47.75	50.80	48.26																																																																																														
70247-40**							40	48.26	55.37	58.42	55.88																																																																																														
70247-44**							44	53.34	60.45	63.50	60.96																																																																																														
70247-48**							48	58.42	65.53	68.58	66.04																																																																																														
70247-50**							50	60.96	68.07	71.12	68.58																																																																																														
70247-56**							56	68.58	75.69	78.74	76.20																																																																																														
70247-60**							60	73.66	80.77	83.82	81.28																																																																																														
70247-64**							64	78.74	85.85	88.90	86.36																																																																																														
70247-72**	72	88.90	96.01	99.06	96.52																																																																																																				
C	NOTES: 1. PIN PUSHOUT FORCE (.9072KG)/2LBS MIN. 2. PIN SOLDERABILITY PER MOLEX SPEC. ES-152. 3. PRODUCT SPEC: PS-70246-100 APPLIES. 4. WAFER TO BE FLAT WITHIN .003 MM/MM. 5. DIMENSIONS FOR PLATING LOCATION: 5A MEASURE POINT FOR THICKNESS 5B MINIMUM COVERAGE 6 GOLD END OF PIN UNLESS OVERALL PLATED. 7 FINISH: - 51 : 15 MICRO INCHES MIN GOLD PLATE ON CONTACT AND 75 MICRO INCHES MIN TIN PLATE ON SOLDERTAIL BOTH OVER 50 MICRO INCHES MIN NICKEL OVERALL. - 52 : 30 MICRO INCHES MIN GOLD PLATE ON CONTACT AND 75 MICRO INCHES MIN TIN PLATE ON SOLDERTAIL BOTH OVER 50 MICRO INCHES MIN NICKEL OVERALL. - 54 : 5 MICRO INCHES MIN GOLD PLATE ON CONTACT AND 75 MICRO INCHES MIN TIN PLATE ON SOLDERTAIL. BOTH OVER 50 MICRO INCHES MIN NICKEL OVERALL. 8 CHECK WITH SALES OFFICE FOR AVAILABILITY. 9 DIM AT THE CENTRE OF THE SHROUDED WALL SHALL BE 5.91MM MIN. THIS SPEC IS VALID FOR ALL CKT SIZE. 10. MATERIAL: HSG: PBT, GLASS FILLED, UL94V-0, COLOUR: BLACK PIN: 0.64MM SQ. PIN PHOSPHOR BRONZE. 11 SOLDERTAIL POSITION TOLERANCE TO BE GAUGED. 12. PACKAGING SPECIFICATION: PK-87835-001.						PART 8 NUMBER	CKT SIZE	DIM A	DIM B	DIM C	DIM D																																																																																													
							70247-08**	08	7.62	14.73	17.78	15.24																																																																																													
							70247-10**	10	10.16	17.27	20.32	17.78																																																																																													
							70247-12**	12	12.70	19.81	22.86	20.32																																																																																													
							70247-14**	14	15.24	22.35	25.40	22.86																																																																																													
70247-16**							16	17.78	24.89	27.94	25.40																																																																																														
70247-20**							20	22.86	29.97	33.02	30.48																																																																																														
70247-24**							24	27.94	35.05	38.10	35.56																																																																																														
70247-26**							26	30.48	37.59	40.64	38.10																																																																																														
70247-30**							30	35.56	42.67	45.72	43.18																																																																																														
70247-34**							34	40.64	47.75	50.80	48.26																																																																																														
70247-40**							40	48.26	55.37	58.42	55.88																																																																																														
70247-44**							44	53.34	60.45	63.50	60.96																																																																																														
70247-48**							48	58.42	65.53	68.58	66.04																																																																																														
70247-50**							50	60.96	68.07	71.12	68.58																																																																																														
70247-56**							56	68.58	75.69	78.74	76.20																																																																																														
70247-60**							60	73.66	80.77	83.82	81.28																																																																																														
70247-64**							64	78.74	85.85	88.90	86.36																																																																																														
70247-72**	72	88.90	96.01	99.06	96.52																																																																																																				
B	NOTES: 1. PIN PUSHOUT FORCE (.9072KG)/2LBS MIN. 2. PIN SOLDERABILITY PER MOLEX SPEC. ES-152. 3. PRODUCT SPEC: PS-70246-100 APPLIES. 4. WAFER TO BE FLAT WITHIN .003 MM/MM. 5. DIMENSIONS FOR PLATING LOCATION: 5A MEASURE POINT FOR THICKNESS 5B MINIMUM COVERAGE 6 GOLD END OF PIN UNLESS OVERALL PLATED. 7 FINISH: - 51 : 15 MICRO INCHES MIN GOLD PLATE ON CONTACT AND 75 MICRO INCHES MIN TIN PLATE ON SOLDERTAIL BOTH OVER 50 MICRO INCHES MIN NICKEL OVERALL. - 52 : 30 MICRO INCHES MIN GOLD PLATE ON CONTACT AND 75 MICRO INCHES MIN TIN PLATE ON SOLDERTAIL BOTH OVER 50 MICRO INCHES MIN NICKEL OVERALL. - 54 : 5 MICRO INCHES MIN GOLD PLATE ON CONTACT AND 75 MICRO INCHES MIN TIN PLATE ON SOLDERTAIL. BOTH OVER 50 MICRO INCHES MIN NICKEL OVERALL. 8 CHECK WITH SALES OFFICE FOR AVAILABILITY. 9 DIM AT THE CENTRE OF THE SHROUDED WALL SHALL BE 5.91MM MIN. THIS SPEC IS VALID FOR ALL CKT SIZE. 10. MATERIAL: HSG: PBT, GLASS FILLED, UL94V-0, COLOUR: BLACK PIN: 0.64MM SQ. PIN PHOSPHOR BRONZE. 11 SOLDERTAIL POSITION TOLERANCE TO BE GAUGED. 12. PACKAGING SPECIFICATION: PK-87835-001.						PART 8 NUMBER	CKT SIZE	DIM A	DIM B	DIM C	DIM D																																																																																													
							70247-08**	08	7.62	14.73	17.78	15.24																																																																																													
							70247-10**	10	10.16	17.27	20.32	17.78																																																																																													
							70247-12**	12	12.70	19.81	22.86	20.32																																																																																													
							70247-14**	14	15.24	22.35	25.40	22.86																																																																																													
70247-16**							16	17.78	24.89	27.94	25.40																																																																																														
70247-20**							20	22.86	29.97	33.02	30.48																																																																																														
70247-24**							24	27.94	35.05	38.10	35.56																																																																																														
70247-26**							26	30.48	37.59	40.64	38.10																																																																																														
70247-30**							30	35.56	42.67	45.72	43.18																																																																																														
70247-34**							34	40.64	47.75	50.80	48.26																																																																																														
70247-40**							40	48.26	55.37	58.42	55.88																																																																																														
70247-44**							44	53.34	60.45	63.50	60.96																																																																																														
70247-48**							48	58.42	65.53	68.58	66.04																																																																																														
70247-50**							50	60.96	68.07	71.12	68.58																																																																																														
70247-56**							56	68.58	75.69	78.74	76.20																																																																																														
70247-60**							60	73.66	80.77	83.82	81.28																																																																																														
70247-64**							64	78.74	85.85	88.90	86.36																																																																																														
70247-72**	72	88.90	96.01	99.06	96.52																																																																																																				
A	NOTES: 1. PIN PUSHOUT FORCE (.9072KG)/2LBS MIN. 2. PIN SOLDERABILITY PER MOLEX SPEC. ES-152. 3. PRODUCT SPEC: PS-70246-100 APPLIES. 4. WAFER TO BE FLAT WITHIN .003 MM/MM. 5. DIMENSIONS FOR PLATING LOCATION: 5A MEASURE POINT FOR THICKNESS 5B MINIMUM COVERAGE 6 GOLD END OF PIN UNLESS OVERALL PLATED. 7 FINISH: - 51 : 15 MICRO INCHES MIN GOLD PLATE ON CONTACT AND 75 MICRO INCHES MIN TIN PLATE ON SOLDERTAIL BOTH OVER 50 MICRO INCHES MIN NICKEL OVERALL. - 52 : 30 MICRO INCHES MIN GOLD PLATE ON CONTACT AND 75 MICRO INCHES MIN TIN PLATE ON SOLDERTAIL BOTH OVER 50 MICRO INCHES MIN NICKEL OVERALL. - 54 : 5 MICRO INCHES MIN GOLD PLATE ON CONTACT AND 75 MICRO INCHES MIN TIN PLATE ON SOLDERTAIL. BOTH OVER 50 MICRO INCHES MIN NICKEL OVERALL. 8 CHECK WITH SALES OFFICE FOR AVAILABILITY. 9 DIM AT THE CENTRE OF THE SHROUDED WALL SHALL BE 5.91MM MIN. THIS SPEC IS VALID FOR ALL CKT SIZE. 10. MATERIAL: HSG: PBT, GLASS FILLED, UL94V-0, COLOUR: BLACK PIN: 0.64MM SQ. PIN PHOSPHOR BRONZE. 11 SOLDERTAIL POSITION TOLERANCE TO BE GAUGED. 12. PACKAGING SPECIFICATION: PK-87835-001.						PART 8 NUMBER	CKT SIZE	DIM A	DIM B	DIM C	DIM D																																																																																													
							70247-08**	08	7.62	14.73	17.78	15.24																																																																																													
							70247-10**	10	10.16	17.27	20.32	17.78																																																																																													
							70247-12**	12	12.70	19.81	22.86	20.32																																																																																													
							70247-14**	14	15.24	22.35	25.40	22.86																																																																																													
70247-16**							16	17.78	24.89	27.94	25.40																																																																																														
70247-20**							20	22.86	29.97	33.02	30.48																																																																																														
70247-24**							24	27.94	35.05	38.10	35.56																																																																																														
70247-26**							26	30.48	37.59	40.64	38.10																																																																																														
70247-30**							30	35.56	42.67	45.72	43.18																																																																																														
70247-34**							34	40.64	47.75	50.80	48.26																																																																																														
70247-40**							40	48.26	55.37	58.42	55.88																																																																																														
70247-44**							44	53.34	60.45	63.50	60.96																																																																																														
70247-48**							48	58.42	65.53	68.58	66.04																																																																																														
70247-50**							50	60.96	68.07	71.12	68.58																																																																																														
70247-56**							56	68.58	75.69	78.74	76.20																																																																																														
70247-60**							60	73.66	80.77	83.82	81.28																																																																																														
70247-64**							64	78.74	85.85	88.90	86.36																																																																																														
70247-72**	72	88.90	96.01	99.06	96.52																																																																																																				
Downloaded from Arrow.com DATE: 2019/11/06							THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION <table><tr><td colspan="2">DIMENSION UNITS</td><td colspan="2">SCALE</td><td colspan="4" rowspan="2">CURRENT REV DESC: MIGRATED TO NX</td><td colspan="4" rowspan="2"> molex </td></tr><tr><td>mm</td><td></td><td>NTS</td><td></td></tr><tr><td colspan="4">GENERAL TOLERANCES (UNLESS SPECIFIED)</td><td colspan="4" rowspan="5">EC NO: 626879 DRWN: ABABU01 2019/11/04 CHK'D: MRAMAKRISHNA 2019/11/06 APPR: MRAMAKRISHNA 2019/11/06</td><td colspan="4" rowspan="5">C-GRID, SHROUDED HEADER R/A (SLOTTED W/O STANDOFFS)</td></tr><tr><td></td><td>MM</td><td></td><td>INCH</td></tr><tr><td>4 PLACES</td><td>±</td><td></td><td>±</td></tr><tr><td>3 PLACES</td><td>±</td><td></td><td>±</td></tr><tr><td>2 PLACES</td><td>±</td><td>0.2</td><td>±</td></tr><tr><td>1 PLACE</td><td>±</td><td></td><td>±</td><td colspan="4" rowspan="2">INITIAL REVISION: DRWN: JENNIFER 1987/09/21 APPR: MLONG 2011/12/07</td><td colspan="2">DOCUMENT NUMBER</td><td>DOC TYPE</td><td>DOC PART</td><td>REVISION</td></tr><tr><td>0 PLACES</td><td>±</td><td></td><td>±</td><td colspan="2">SDA-70247-XX00-04</td><td>PSD</td><td>001</td><td>K</td></tr><tr><td colspan="4">ANGULAR TOL ± 3.0 °</td><td colspan="2">THIRD ANGLE PROJECTION</td><td>DRAWING</td><td>SERIES</td><td colspan="2">MATERIAL NUMBER</td><td colspan="2">CUSTOMER</td><td>SHEET NUMBER</td></tr><tr><td colspan="4">DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS</td><td colspan="2"></td><td>A3-SIZE</td><td>70247</td><td colspan="2">SEE TABLE</td><td colspan="2">GENERAL MARKET</td><td>2 OF 2</td></tr></table>							DIMENSION UNITS		SCALE		CURRENT REV DESC: MIGRATED TO NX				molex				mm		NTS		GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 626879 DRWN: ABABU01 2019/11/04 CHK'D: MRAMAKRISHNA 2019/11/06 APPR: MRAMAKRISHNA 2019/11/06				C-GRID, SHROUDED HEADER R/A (SLOTTED W/O STANDOFFS)					MM		INCH	4 PLACES	±		±	3 PLACES	±		±	2 PLACES	±	0.2	±	1 PLACE	±		±	INITIAL REVISION: DRWN: JENNIFER 1987/09/21 APPR: MLONG 2011/12/07				DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION	0 PLACES	±		±	SDA-70247-XX00-04		PSD	001	K	ANGULAR TOL ± 3.0 °				THIRD ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS						A3-SIZE	70247	SEE TABLE		GENERAL MARKET		2 OF 2
DIMENSION UNITS		SCALE		CURRENT REV DESC: MIGRATED TO NX				molex																																																																																																	
mm		NTS																																																																																																							
GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 626879 DRWN: ABABU01 2019/11/04 CHK'D: MRAMAKRISHNA 2019/11/06 APPR: MRAMAKRISHNA 2019/11/06				C-GRID, SHROUDED HEADER R/A (SLOTTED W/O STANDOFFS)																																																																																																	
	MM		INCH																																																																																																						
4 PLACES	±		±																																																																																																						
3 PLACES	±		±																																																																																																						
2 PLACES	±	0.2	±																																																																																																						
1 PLACE	±		±	INITIAL REVISION: DRWN: JENNIFER 1987/09/21 APPR: MLONG 2011/12/07				DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION																																																																																													
0 PLACES	±		±					SDA-70247-XX00-04		PSD	001	K																																																																																													
ANGULAR TOL ± 3.0 °				THIRD ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER		CUSTOMER		SHEET NUMBER																																																																																													
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS						A3-SIZE	70247	SEE TABLE		GENERAL MARKET		2 OF 2																																																																																													