

# Limitron™ KLU Class L 600Vac, 601-4000A, time-delay fuses

RoHS



## Catalog symbol:

- KLU-(amp)

## Description:

Bussmann® series Advanced protection KLU Class L time-delay, current-limiting fuses. Time-delay – 5 seconds (minimum) at 500% of rated current.

## Specifications:

### Ratings

Volts 600Vac

Amps 601-4000A\*

IR 200kA Vac RMS Sym.

\* Use KRP-CL for ratings from 225 to 600 amps.

### Agency information

- UL® Listed, Std. 248-10, Class L, Guide JDDZ, File E4273
- CSA® Certified, C22.2 No. 248.10, Class 1422-02, File 53787
- CE
- RoHS compliant

## Catalog numbers (amps)

KLU-601	KLU-1200	KLU-2500
KLU-650	KLU-1500	KLU-3000
KLU-700	KLU-1600	KLU-4000
KLU-800	KLU-1800	
KLU-1000	KLU-2000	

## Carton quantity:

Amp rating	Carton qty.
601-4000	1

## Features:

- Provides 10X better current limitation to help prevent equipment damage caused by short-circuit events.
- 200kA Interrupting rating complies with NEC® Section 110.9 for today's large capacity systems.
- Fast-acting fuse helps prevent equipment damage caused by short-circuit events.
- Copper links result in a minimum 5-second time-delay at 500% ampere rating.
- Ideal for critical industrial or commercial applications that have specific current limitation requirements.

## Recommended fuse blocks — 601 to 1200 amps<sup>†</sup>:

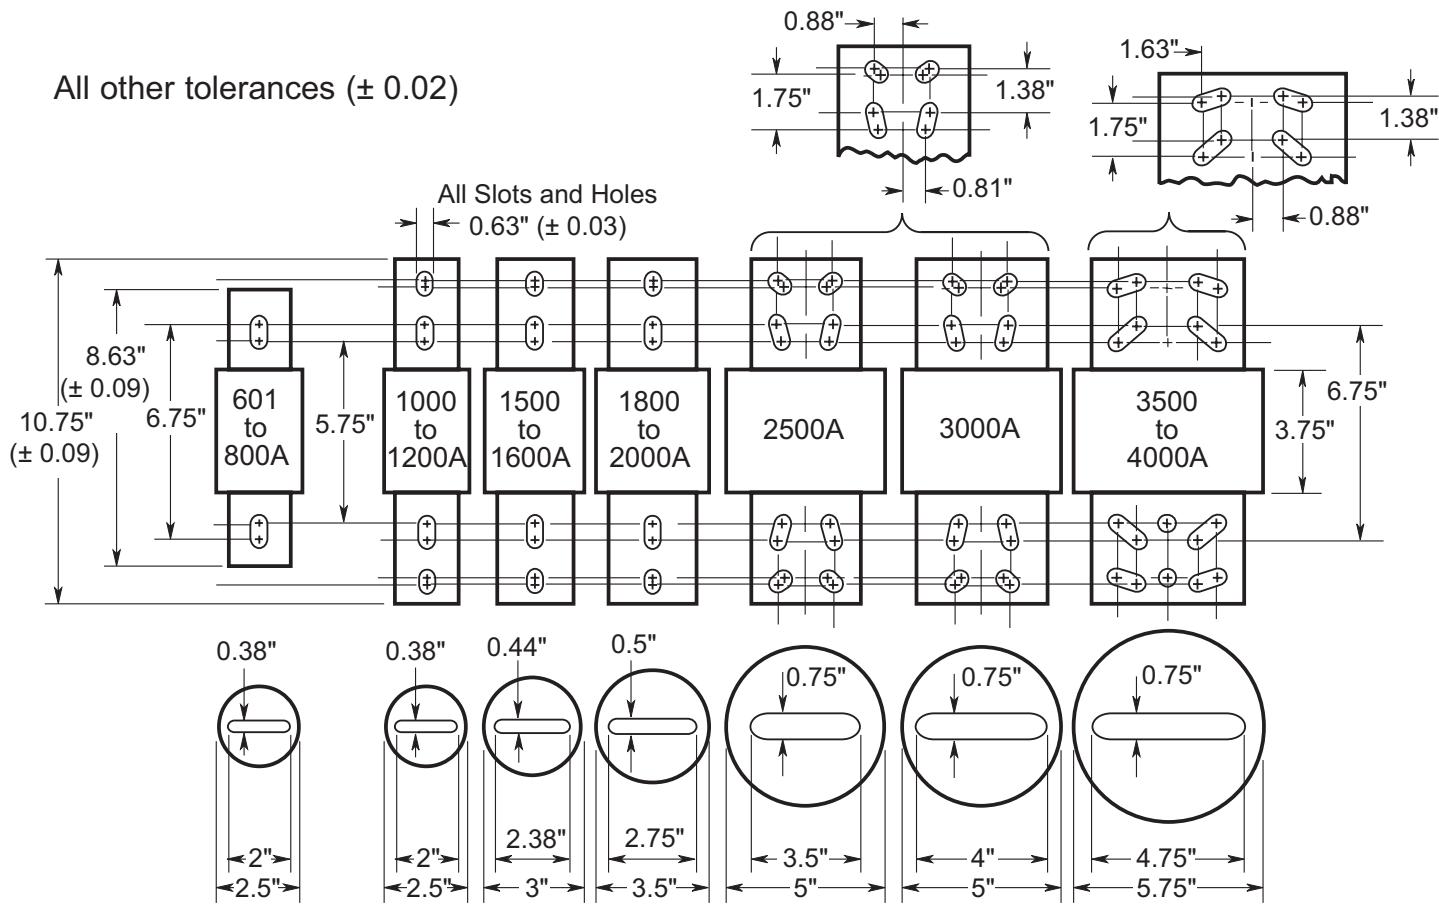
Catalog numbers	Poles
51215	1
51235	3

<sup>†</sup> No Agency listings available.  
No reducers available.

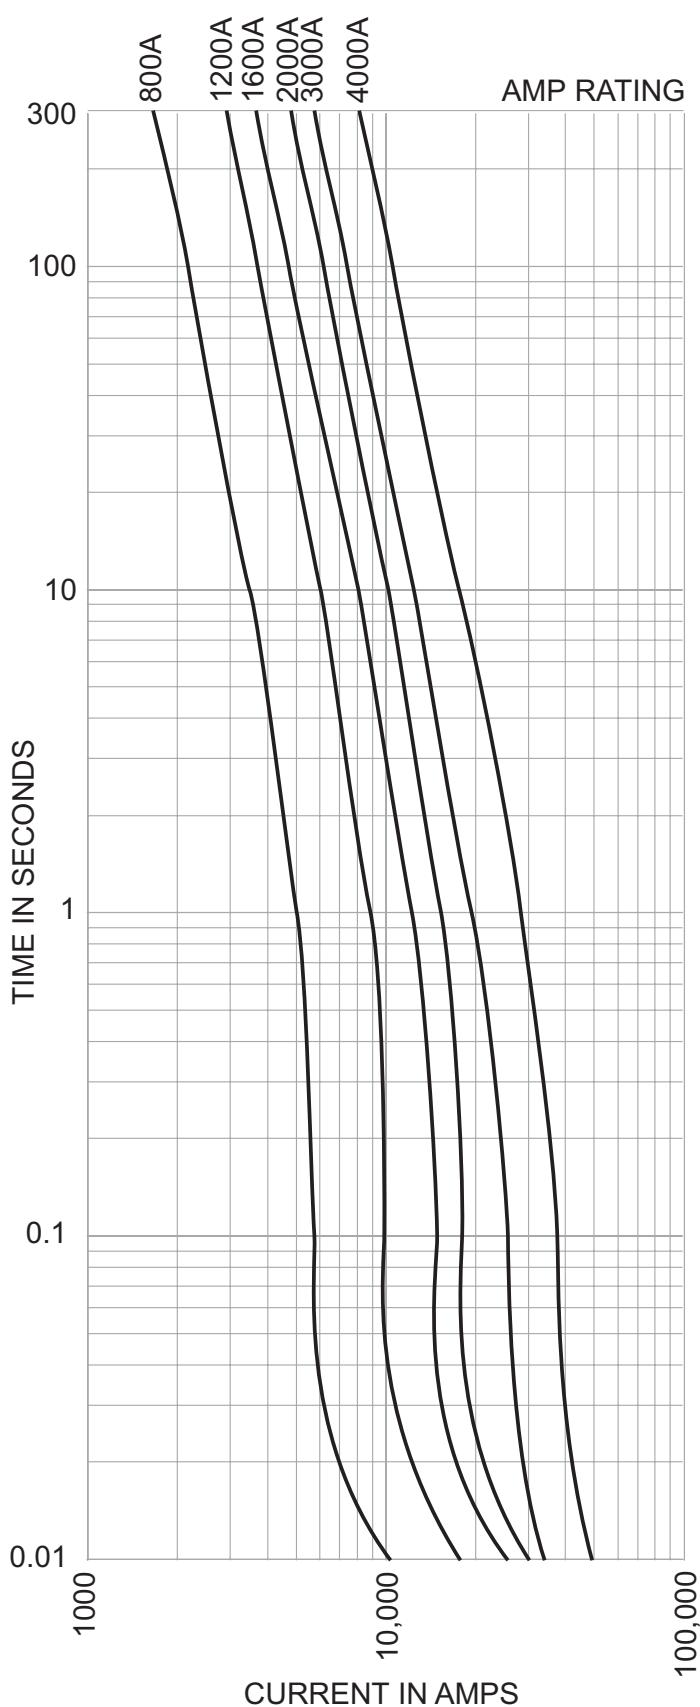
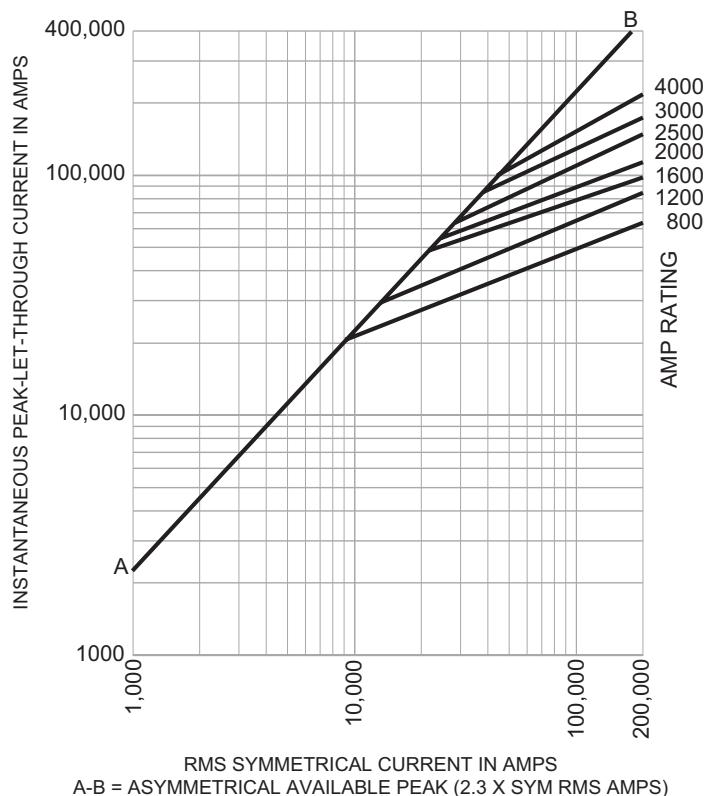
## Dimensions – in:

All other tolerances ( $\pm 0.02$ )

→ All Slots and Holes  
← 0.63" ( $\pm 0.03$ )



Terminals: Width ( $\pm 0.06$ ), Thickness ( $\pm 0.03$ )

**Time-current curves - average melt:****Current-limitation curves:**

The only controlled copy of this data sheet is the electronic read-only version located on the Eaton network drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

**Eaton**  
1000 Eaton Boulevard  
Cleveland, OH 44122  
[Eaton.com](http://Eaton.com)

Bussmann Division  
1114 Old State Road  
Ellisville, MO 63021  
United States  
[Eaton.com/bussmannseries](http://Eaton.com/bussmannseries)

© 2016 Eaton  
All Rights Reserved  
Printed in USA  
Publication No. 1013 — BU-SB13724  
February 2016

Eaton, Bussmann and Limitron are valuable trademarks of Eaton in the US and other countries. You are not permitted to use the Eaton trademarks without prior written consent of Eaton.

CSA is a registered trademark of the Canadian Standards Group.  
NEC is a registered trademark of the National Fire Protection Association, Inc.  
UL is a registered trademark of the Underwriters Laboratories, Inc.

For Eaton's Bussmann series product information,  
call **1-855-287-7626** or visit:  
**[Eaton.com/bussmannseries](http://Eaton.com/bussmannseries)**

Follow us on social media to get the latest product and support information.

