Product Line

- DeepTronica
- Single Pair Ethernet
- ZConnect
- Ceres
- X-Lok
- M Series
- FLOS & FLOS+
- Power
- RBL
- HS-Lok
- NMEA 2000
- Heavy Duty Shielded
- RJ
- USB
- SSL
- HDMI
- DVI
- Fiber Optic
- RF
- Cable Joiner
- Cable Gland
- Pressure Relief Vent
- LED Light Guide
- D-Sub
  - Standard
  - High Density
  - Accessory





SDB-25PFFS-SL8001

Operating Temperature: -40°C ~ +105°C
Transmission Speed: N/A
Shielded: Metal, Shielded
Jacket Material: N/A
Certificate: N/A

You must login first for view the price


Quantity − 1 + Check Stock

Add to Cart | Inquiry

Can't find? Customize your part

Mating Pair & Accessories

Connector Type ▾ Search

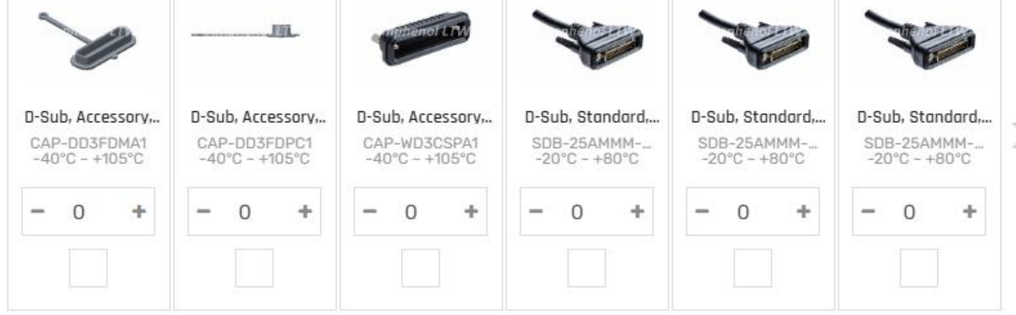

D-Sub, Accessory,...	D-Sub, Accessory,...	D-Sub, Accessory,...	D-Sub, Standard,...	D-Sub, Standard,...	D-Sub, Standard,...
CAP-DD3FDMA1 -40°C ~ +105°C	CAP-DD3FDPC1 -40°C ~ +105°C	CAP-WD3CSPA1 -40°C ~ +105°C	SDB-25AMMM-... -20°C ~ +80°C	SDB-25AMMM-... -20°C ~ +80°C	SDB-25AMMM-... -20°C ~ +80°C
− 0 +	− 0 +	− 0 +	− 0 +	− 0 +	− 0 +

Add to Cart | Inquiry

Specifications | Download / CAD

Nominal Current **5A**	Connector Type **Receptacle**
Shielded **Metal, Shielded**	No. of Contacts **25**
Connector Gender **Female**	Backshell **Straight Without Board Lock**
Mating Style **Screw Thread**	IP Rating **IP68**
Assembly Style **Solder**	

More Options

People Also Bought



SDB-25PFFS-SL8001 | ASSP-10-F-A-C-SA | M12A06ML-12AFL-... | MSAS08ML-SPBML-.. | 1BB-02AFMM-LL6A04

Downloaded from Arrow.com.