

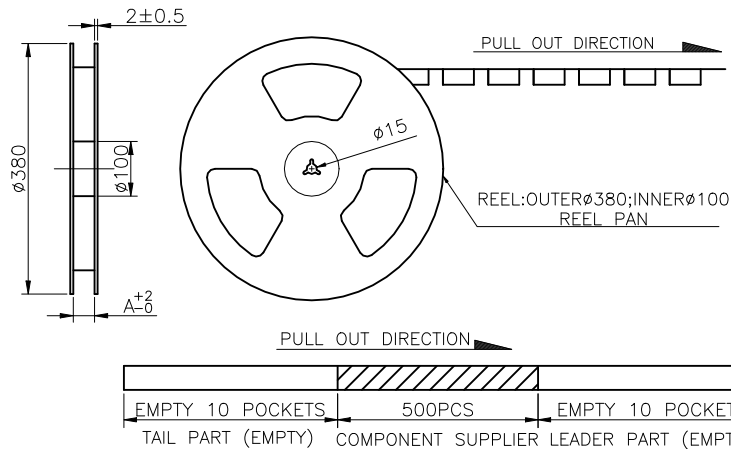




PULL OUT DIRECTION

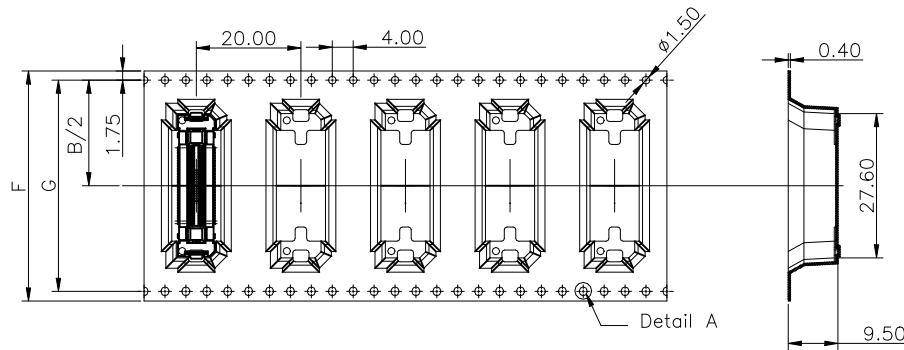


5. QTY LIST:

DIM	NO.	10pin	20~60pin	70~100pin	120pin
F		32.00	44.00	56.00	72.00
G		25.50	40.40	52.40	68.40
N		8	6	5	4
TOTAL(PCS)		4000	3000	2500	2000

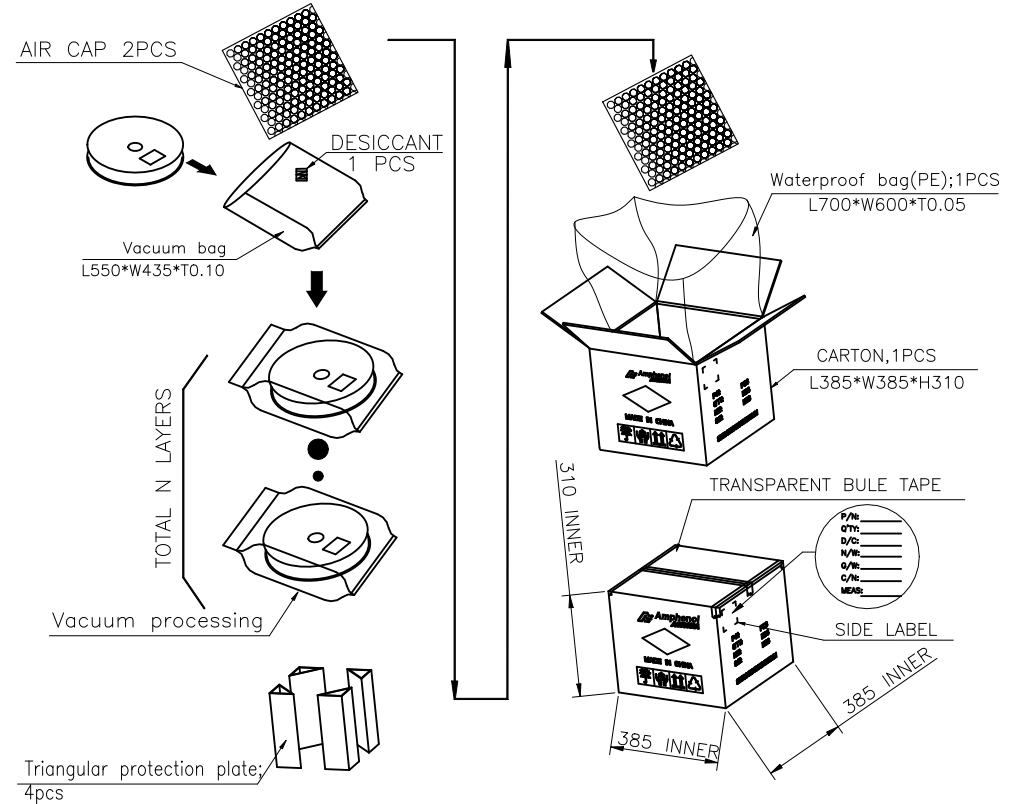

NOTES:

- MATERIAL:
 - CARRY TAPE: HIPS, T=0.50mm, CLEAR
 - REEL: HIPS, BLUE.
 - SHIM: PE, CLEAR.
- PRIMARY PACKING: 500PCS/REEL.
- SECONDARY PACKING: "N" REELS/CARTON ("TOTAL"=N*500/CARTON).
- PEELING RESISTANCE: 0.4N~1.4N(40~140gf);
PEELING ANGLE: 165°~180°;
PEELING SPEED: 300mm/minutes.

UNLESS OTHERWISE SPECIFIED TOLERANCES				ANGLE OF PROJECTION 		 Amphenol Aorora Technology (Huizhou) Co.,Ltd					
X.	±0.30	X. °	± 5'			TITLE: 0.5mm Pitch Floating BTB Plug connector					
X.X	±0.25	X.X °	± 4'								
X.XX	±0.20	X.XX °	± 3'								
X.XXX	±0.15	X.XXX °	± 2'								
LINEAR DIMS		ANGLES DIMS									
DWG NO.: A-S0686				DOC TYPE Customer Drw		SIZE A4 PART NUMBER: B322-1B7L1-112**-E100 REV. D					
MATERIAL		SEE NOTES		DRAWN DATE SH Chen 2023-11-29							
FINISHED		SEE NOTES		DESIGN DATE SH Chen 2023-11-29							
				CHECKED DATE Elven 2023-11-29							
				APPROVED DATE Rain 2023-11-29							
						SCALE		1:1	UNIT : mm	SHEET 2 OF 2	

This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of AOR. No part of the information shown on this document may be used in any way or disclosed to others without the written consent of AOR. © 2019 AOR