


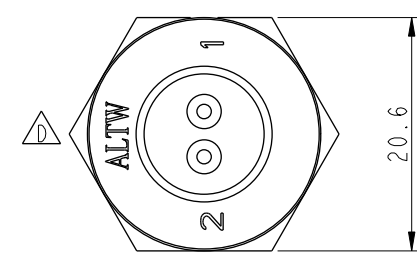
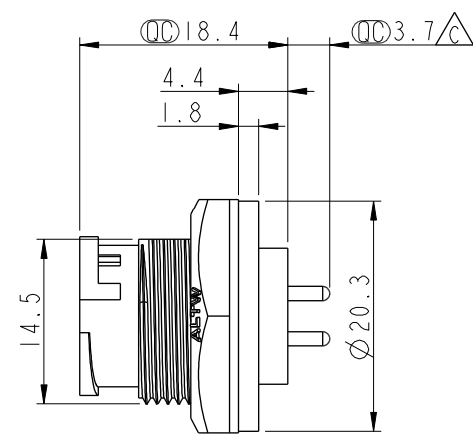


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LEN1270090	2012/01/17	Yulong	Change Dimensions Position
D	LEN1540237	2014/12/27	Jinhai	Change Logo
E	CI90274	2019/02/19	Ruru	Modify Note




PCB Layout

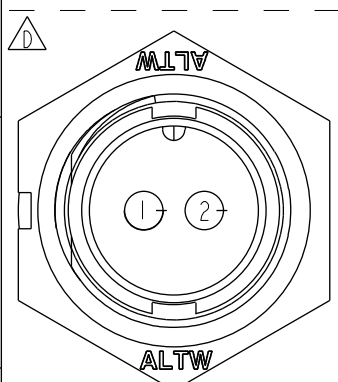

Pin Assignments
Front View

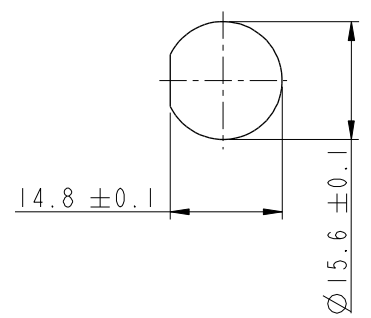

Recommended Panel Cut-Out

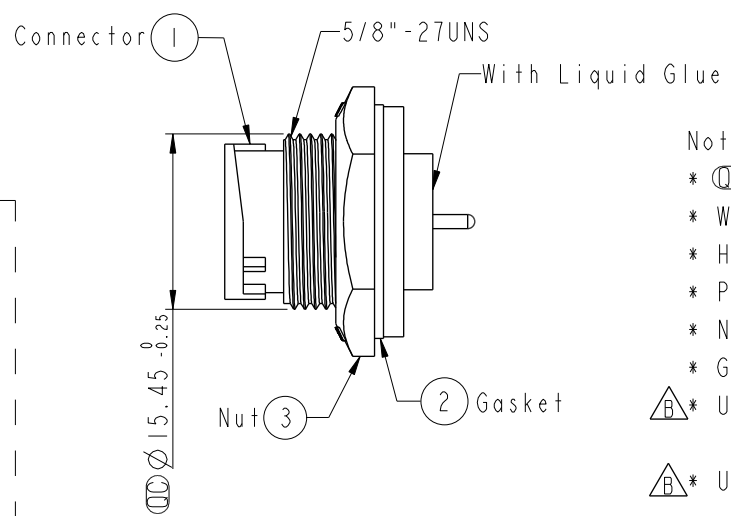

Note:

- * Important Dimension To Check.
- * Waterproof Rate: IP67, Unmated
- * Housing: Thermoplastic, Black
- * Pin: Copper Alloy, Gold Plated
- * Nut: Thermoplastic, Black
- * Gasket: Rubber, Black

- * Use with waterproof cap or dust cap
Panel Thickness Max: 3.0mm
- * Use without waterproof cap or dust cap
Panel Thickness Max: 4.5mm
- * Gasket and Nut are packed separately in PE bags.

UNIT: mm		TOLERANCE		TITLE		ITEM NO.		DRAWN BY		DATE	
.X ±0.25		.XX ±0.1		Standard		BB-02PMMP-LC7001		Ruru		2019-02-19	
.XXX ±0.05		ANGLES ±1°		Panel Lock 2Pin M Conn. M Pin		DWG NO.		CHECKED BY		DATE	
				SCALE 1:1		BB-02PMMP-LC7001		Rita		2019-02-19	
				REV. E		CUSTOMER		APPROVED BY		DATE	
				WC-REV. B.3		ALTW		Max		2019-02-19	
				Inspection item							

Amphenol LTW
安費諾亮泰企業股份有限公司