

MIL-STD-1553 TRANSFORMERS

Low Profile 3.3V Pulse Transformers
Ruggedized



These Non-QPL interface transformers are built and tested in AS9100/ISO 9001 approved facilities.

- ⊗ Designed for transceivers utilizing a single supply voltage to 3.3V
- ⊗ Single transformer package
- ⊗ Dual Ratio
- ⊗ Max Reflow Temperature: 225°C
- ⊗ Moisture Sensitivity Level:
 - ⊗ Q1553: Level 1
 - ⊗ SMQ1553, GL1553, DGL1553: Level 3
- ⊗ Applicable Standards:
 - ⊗ MIL-STD-1553B
 - ⊗ MIL-PRF-21038
 - ⊗ MIL-STD-202

Summary Performance Specifications

Droop	20% MAX
Overshoot	±1V MAX
Common Mode Rejection (CMR)	45dB MIN
Frequency Range (no load)	75kHz - 1MHz
Operating & Storage Temperature Range	-55°C to +125°C
Weight	5 grams MAX
Insulation Resistance	10K MΩ MIN @ 250Vdc
Dielectric Withstanding Voltage	100Vrms

Electrical Specifications @ 25°C

Part Number	Terminals	Ratio (±3%)	RDC (Ω MAX)	Impedance (Ω MIN)
Q1553-70	1-3:4-8 1-3:5-7	1CT:3CT 1CT:2.15CT	1-3 = 0.35 4-8 = 3.50	4-8 4000
Q1553-71	1-3:4-8 1-3:5-7	1CT:3.54CT 1CT:2.50CT	1-3 = 0.35 4-8 = 3.50	4-8 4000
SMQ1553-70	1-3:4-8 1-3:5-7	1CT:3CT 1CT:2.15CT	1-3 = 0.35 4-8 = 3.50	4-8 4000
SMQ1553-71	1-3:4-8 1-3:5-7	1CT:3.54CT 1CT:2.50CT	1-3 = 0.35 4-8 = 3.50	4-8 4000
GL1553-70	1-3:4-8 1-3:5-7	1CT:3CT 1CT:2.15CT	1-3 = 0.80 4-8 = 3.50	4-8 4000
GL1553-71	1-3:4-8 1-3:5-7	1CT:3.54CT 1CT:2.50CT	1-3 = 0.80 4-8 = 3.50	4-8 4000
DGL1553-70	1-3:16-13/5-7:12-9 1-3:15-14/5-7:11-10	1CT:3CT 1CT:2.15CT	1-3, 5-7 = 0.80 16-13, 12-9 = 3.50	16-13 & 12-9 4000
DGL1553-71	1-3:16-13/5-7:12-9 1-3:15-14/5-7:11-10	1CT:3.54CT 1CT:2.50CT	1-3, 5-7 = 0.80 16-13, 12-9 = 3.50	16-13 & 12-9 4000

NOTES:

1. Add suffix "NL" for RoHS compliant version; i.e. Q1553-70 becomes Q1553-70NL. NL parts have 100% SN Lead Finish (MSL:4)





Mechanicals

Electrical Schematics

Q1553

Dimensions: inch [mm]

Tolerance (unless otherwise specified): ±0.010 [0.25]



Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2020. iNRCORE, LLC. All rights reserved.

M128.H (01/22)

MIL-STD-1553 TRANSFORMERS



Low Profile 3.3V Pulse Transformers
Ruggedized



Mechanicals

Electrical Schematics



SMQ1553

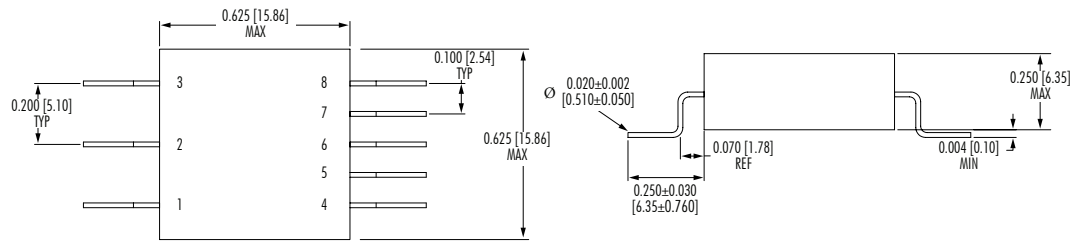

Mechanicals

Electrical Schematics



GL1553

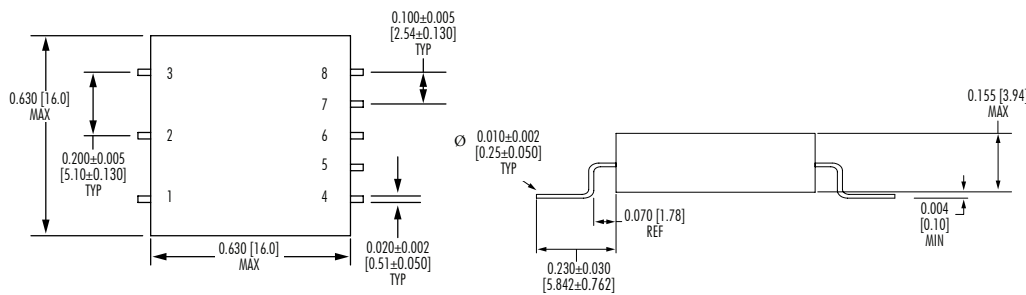

Mechanicals

Electrical Schematics


DGL1553

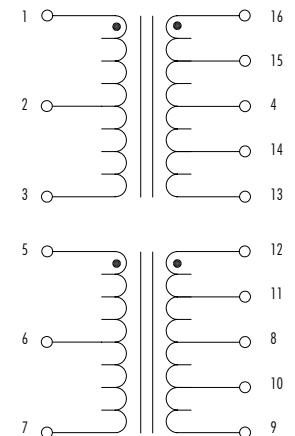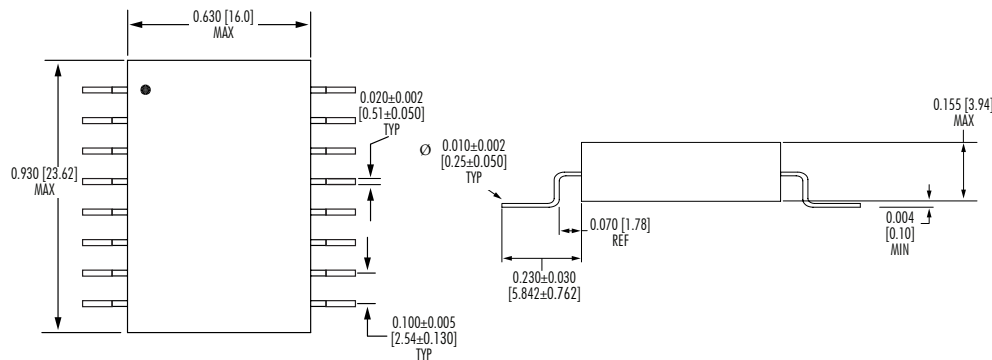

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2020. iNRCORE, LLC. All rights reserved.

M128.H (01/22)

Tin/Lead Recommended Reflow Profile (Based on J-STD-020D)

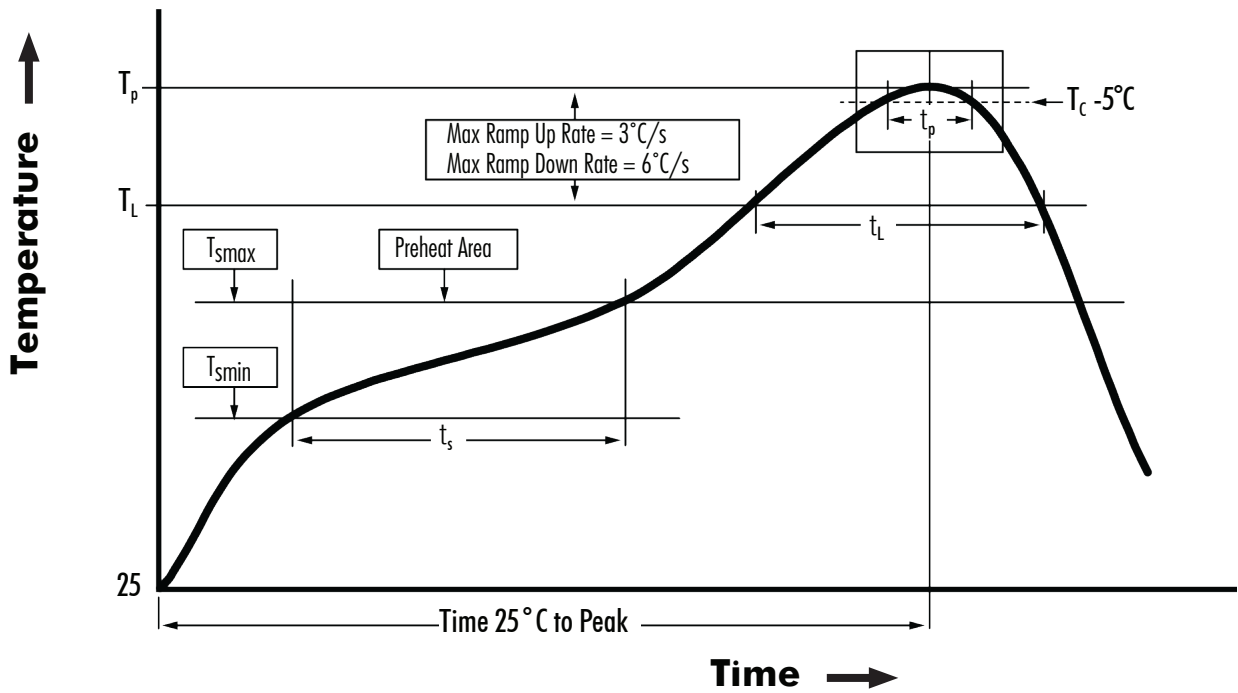

T_{SMIN} (°C)	T_{SMAX} (°C)	T_L (°C)	T_P (°C MAX)	t_s (s)	t_L (s)	t_p (s MAX)	Ramp-up rate (T_L to T_P)	Ramp-down rate (T_P to T_L)	Time 25°C to peak temperature (s MAX)
100	150	183	225	60 - 120	60 - 150	20	3°C/s MAX	6°C/s MAX	360

- NOTES:
1. All temperatures measured on the package leads.
 2. Maximum number of reflow cycles not to exceed 2.
 3. Reflow cycle applies only to surface mount parts.



iNRCORE, LLC
311 Sinclair Road, Bristol, PA 19007-6812 USA
Tel: +1.215.781.6400 Fax: +1.215.781.6430

www.iNRCORE.com

M128.H (01/22)

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2020. iNRCORE, LLC. All rights reserved.