

Materials

1. Center contact, C5191 phosphor bronze, 2 μ m nickel plated
2. Insulator, PBT + 15% glass fiber, black
3. Shell, C2700 brass, 2 μ m nickel plated

Electrical requirements

Dielectric strength: 1 min @ 500 Vac
Insulation resistance: 100 M Ω @ 500 Vdc
Contact resistance: 30 m Ω or less

Mechanical requirements


Insertion force: 0.5-3 kgf
Withdrawal force: 0.4-2 kgf
Durability: 5000 mating cycles while maintaining; 0.3-2 kgf insertion force, 0.2-1.5 kgf withdrawal force and a less than 100 m Ω contact resistance.

Environmental requirements

Damp test: 40 °C, RH 90-100% for 96 hrs. Cool to ambient and recover for 2 hours. Maintain dielectric strength of 500 Vac for 1 min, insulation resistance of 50 M Ω @ 500 Vdc minimum and a contact resistance of 100 m Ω or less.

Dry test: 70 °C, RH 70-85% for 96 hrs. Cool to ambient and recover for 2 hours. Maintain insulation resistance of 50 M Ω @ 500 Vdc minimum and a contact resistance of 100 m Ω or less.

Salt spray test: 35 °C, RH 90-95%, 5% NaCl mist for 24 hrs. Wash parts after test. Maintain mechanical requirements and a contact resistance of less than 80 m Ω .

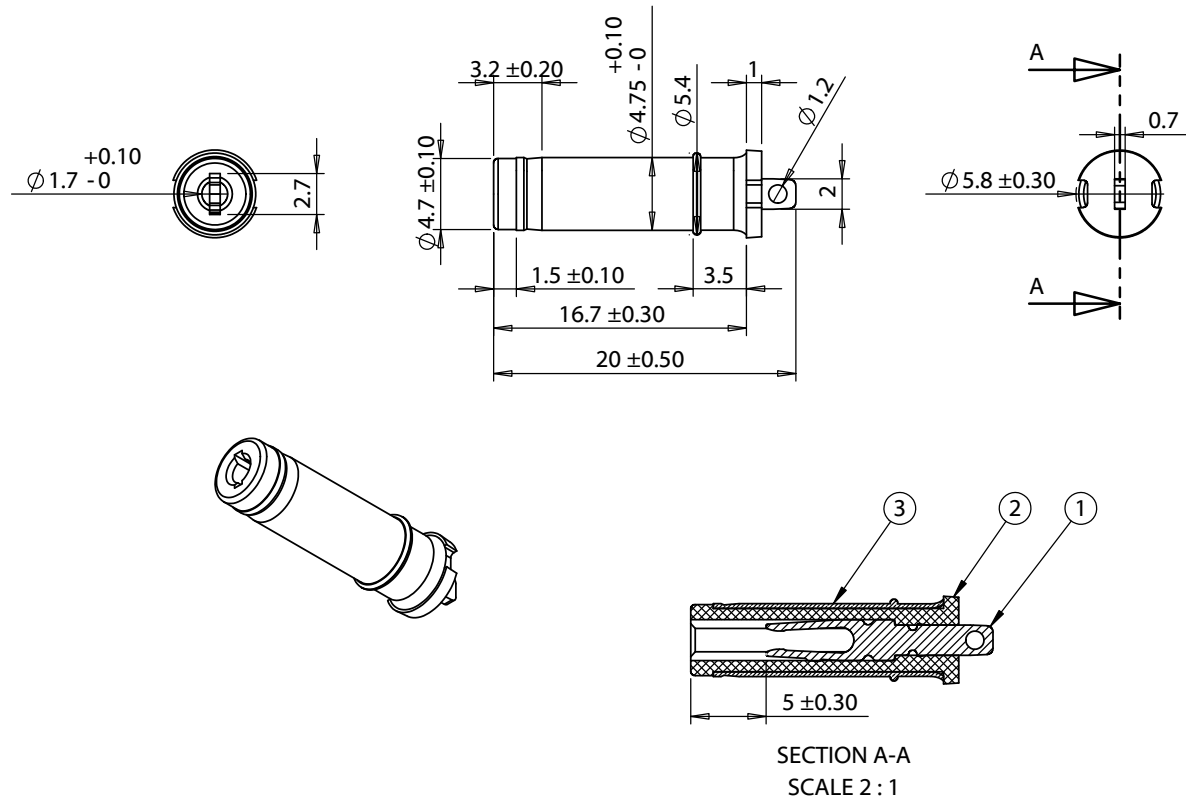


Revision:	Date:	Description:	Prepared:	Notes:	TENSILITY tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com		
A	9/2/2009	Initial release	Verified:	RoHS compliant Function test: no open, no short circuit, no intermittent			
A1	11/9/2012	Added test data	Dimensions are in millimeters. Tolerances: X: ± 0.3 mm X.X: ± 0.1 mm X.XX: ± 0.05 mm	Description:	Size:	Part number:	
				Connector, dc plug, 4.75x1.7xL20 mm, EIAJ-3, molding style, spring contacts	A	50-00028	
					Scale: 5:1		Sheet 1 of 2

Ratings

Maximum Operating Voltage: 48 Vdc
Maximum Operating Current: 6.0 A

Operating Temperature Range

-25 to 70 °C, relative humidity of 85% or less

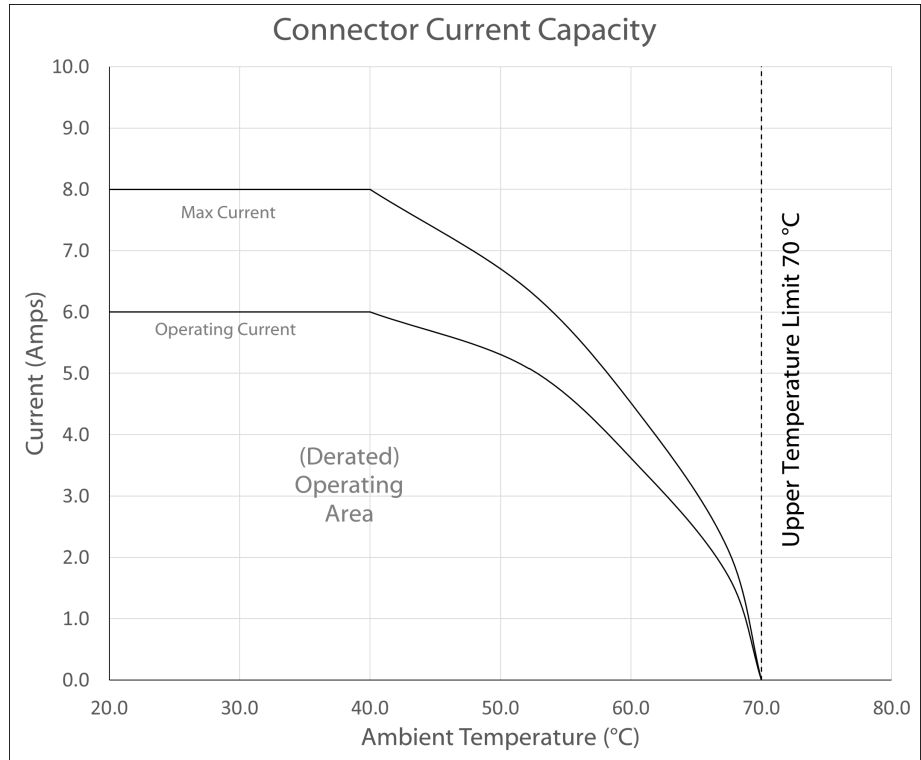

Testing based on IEC 60512-5-2. Max current curve generated with isolated test article under controlled environmental conditions, and does not take into account external factors such as housings, mating cables, or other circuitry. Operating current curve (derated by 20% of maximum values) accounts for external factors, and manufacturing variation.

Revision:	Date:	Description:	Prepared:	Notes:	TENSILITY tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com		
A	9/2/2009	Initial release	Verified:	RoHS compliant			
A1	11/9/2012	Added test data		Function test: no open, no short circuit, no intermittent	Size:	Part number:	
				Description:	A	50-00028	
				Connector, dc plug, 4.75x1.7xL20 mm, EIAJ-3, molding style, spring contacts	Scale: 5:1		Sheet 2 of 2