

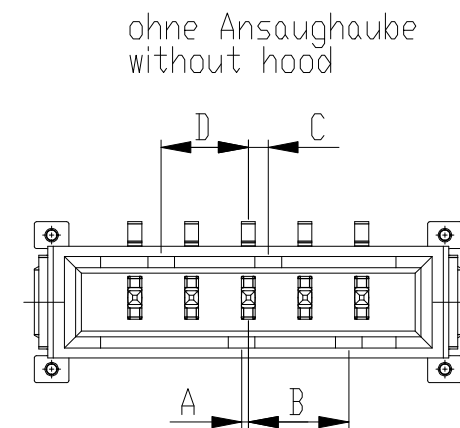
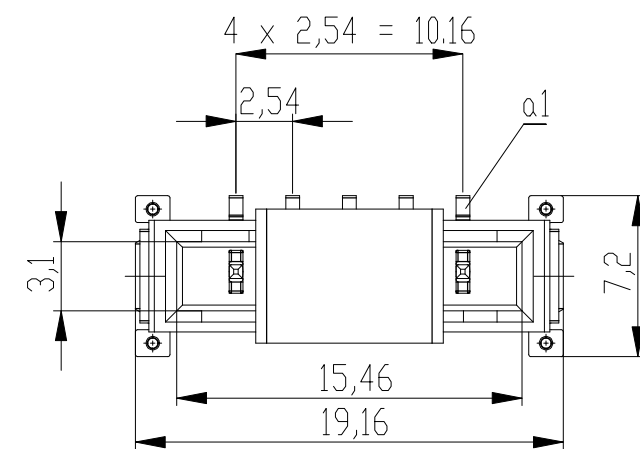
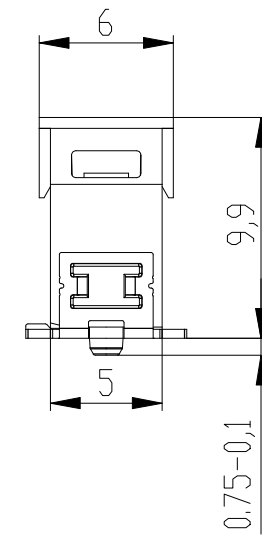


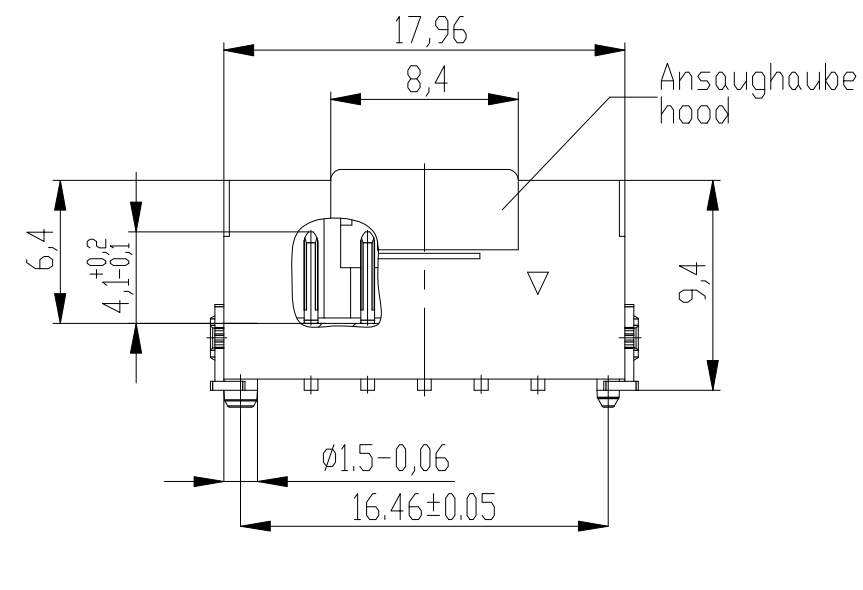

Leiterplatten-Layout Vorschlag für SMT
PCB-Layout Proposal for SMT

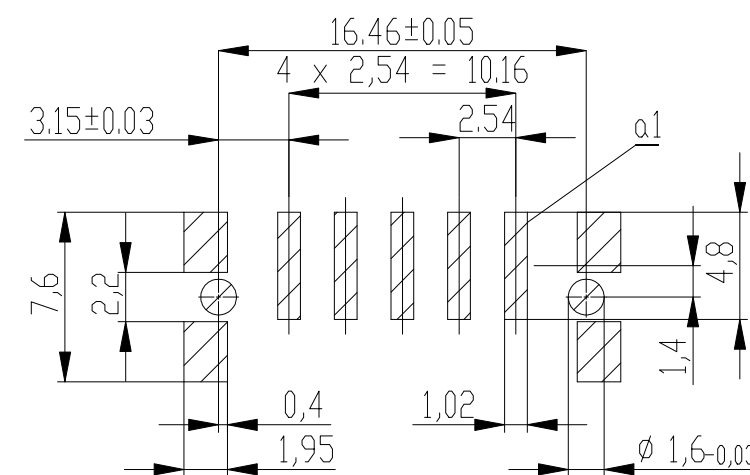


Anforderungsstufe 1
Performance Level 1

Kontaktbereich vergoldet
Mating Area gold plating


Anschlussbereich verzinkt 4-6 µm
Terminal Area 4-6 µm tin plating

Koplanarität der Anschlüsse ≤ 0,1 mm
Coplanarity Area of Termination ≤ 0,1 mm

Verpackt in Gurtverpackung
Tape on Reel Packaging
Verpackungseinheit: 320 Stück
Packaging unit: 320 pcs

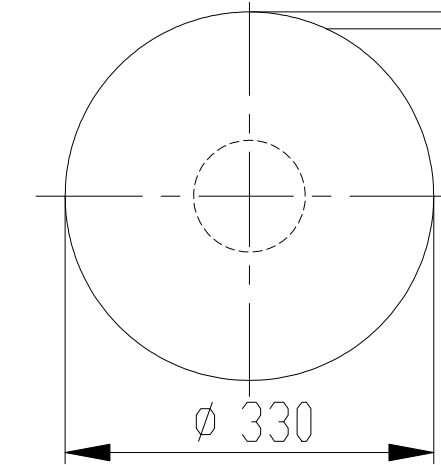


Abspulrichtung - Reel off Direction

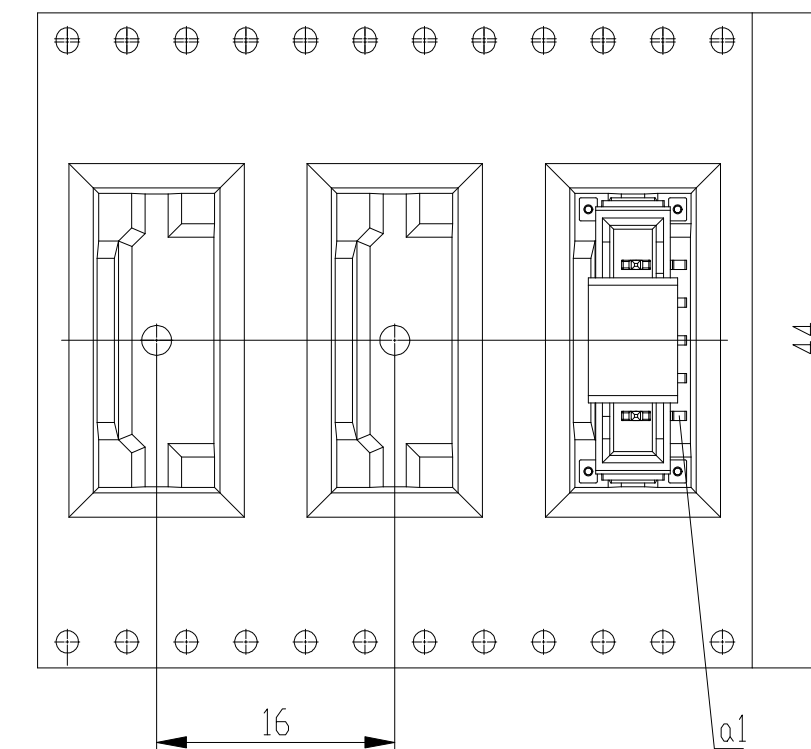

454205-E		weiß white	0,3	4,5	0,9	3,9	Codierung wie Variante schwarz Encoding such variant black
254834-E		rot red	3,9	0,9	4,5	0,3	
254833-E		grün green	2,7	2,1	3,3	1,5	
254832-E		blau blue	1,5	3,3	2,1	2,7	
254831-E		schwarz black	0,3	4,5	0,9	3,9	
Ident-Nr. part-no.	Codierung coding	Farbe color	A	B	C	D	Bemerkung note

Copyright by TE Connectivity
Proprietary notice pursuant to ISO 9001 to be observed.

Information:				Tolerances		 All Dimensions in mm		Scale 3:1											
Customer drawing:				Subject to modification without prior notice. Drawing will not be updated.		Designation													
THIS DRAWING IS A CONTROLLED DOCUMENT.						ERNI-M 2,54 SRC-P, 5-polig													
<table><tr><td>g</td><td></td><td>29.04.2013</td><td></td></tr><tr><td>Index</td><td></td><td>Date</td><td></td></tr></table>				g		29.04.2013		Index		Date		 TE Connectivity		C- 224914-E				I	
				g		29.04.2013													
Index		Date																	
Class				SRCP		A2													