
THIS DRAWING IS A CONTROLLED DOCUMENT.


| LOC | DIST |
|---|---|
| FX | 00 |

REVISIONS

| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|---|---|---|---|---|
| | A | REVISED PER ECO-10-000500 | 20JAN2010 | MBH | BB |
| | A1 | REVISED PER ECO-12-015851 | 05SEP2012 | DLD | SLM |
| | A2 | REVISED PER ECO-13-005998 | 05APR2013 | DLD | SLM |
| | B | REVISED PER ECO-20-006565 | 12MAY2020 | AB | AS |



SCALE 5:1

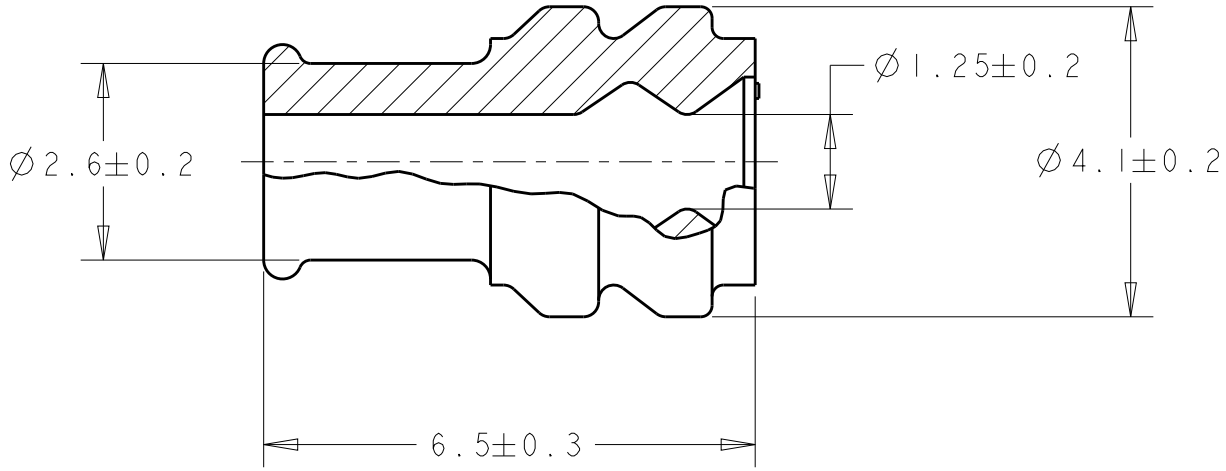


1. FOR INSULATION Ø1.35 TO Ø2.1mm.

2. MATERIAL: SILICONE
   COLOR: RED

3. INSULATION CRIMP MEASUREMENTS ARE DEPENDENT ON WIRE INSULATION TYPE AND OUTSIDE DIAMETER. INSULATION CRIMP MUST BE SUFFICIENT TO KEEP SEAL FROM SLIDING OUT OF CRIMP WHEN INSERTING INTO CONNECTOR CAVITY BUT NOT TEAR THE SEAL.

2098582-1

PART NUMBER

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY -
ALL RIGHTS RESERVED.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±-
1 PLC ±-
2 PLC ±-
3 PLC ±-
4 PLC ±-
ANGLES ±1°

DWN HARISH.M 22OCT2009
CHK B.BUCHTER 22OCT2009
APVD B.BUCHTER 22OCT2009

PRODUCT SPEC -

APPLICATION SPEC -

WEIGHT -

MATERIAL -

FINISH -

TE Connectivity

NAME MCON CABLE SEAL, 50 DURO-METER SILO 3.45 - 3.70mm DIAMETER

| SIZE | CAGE CODE | DRAWING NO | RESTRICTED TO |
|---|---|---|---|
| A4 | 00779 | C-2098582 | - |

Customer Drawing

SCALE 10:1 SHEET 1 OF 1 REV B

1469-35 (3/11)

Downloaded from Arrow.com.