
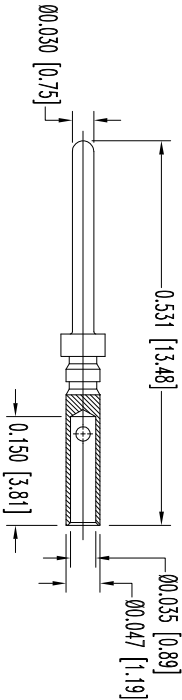
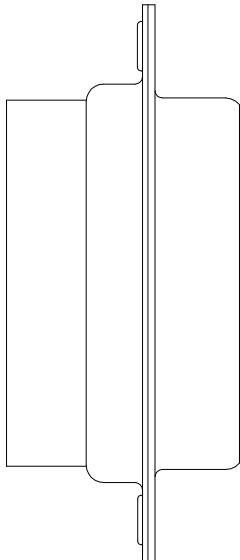
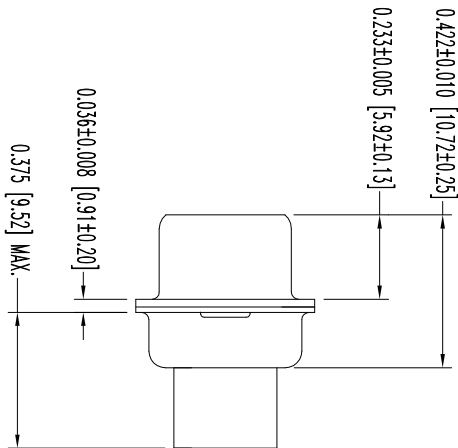


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO CONNECT POSITRONIC. IT IS TO BE USED ONLY FOR THE INFORMATION PROVIDED HEREIN. NO PART OF THIS DRAWING IS TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT PERMISSION IN WRITING FROM CONNECT POSITRONIC. THE USER EMPLOYER'S SUCH INFORMATION AT HIS OWN DISCRETION. CONNECT POSITRONIC MAKES NO WARRANTY, REPRESENTATION, OR ENDORSEMENT OF ANY KIND, AND ASSUMES NO LIABILITY FOR ANY RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

SK6443

DATE	REV	REVISION/RECORD	APP	DR	CK
8-9-05	NC	ECO 24484	COLE	YK	TK
3-30-10	A	ECO 32308	COLE	BE	SV

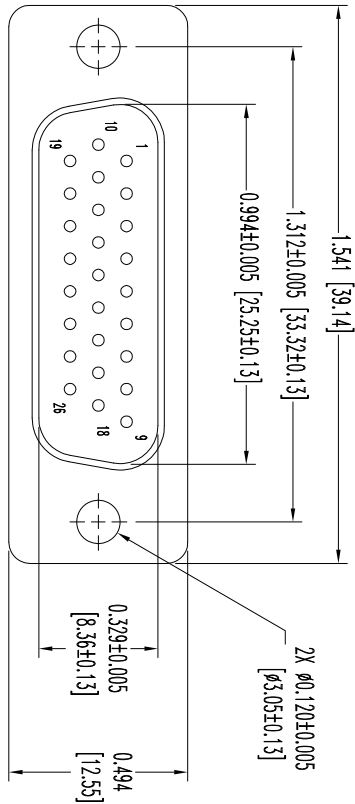

26X MALE CONTACT
ENLARGED


NOTES:

1. MATERIALS AND FINISHES:
INSULATOR: GLASS FILLED POLYESTER PER ASTM D5927, UL 94V-0, BLUE COLOR.
CONTACTS: PRECISION MACHINED HIGH TENSILE COPPER ALLOY, GOLD FLASH OVER NICKEL PLATE.
SHELLS: STEEL WITH TIN PLATE.
2. DETAILED PRODUCT, ELECTRICAL, AND MECHANICAL INFORMATION IS AVAILABLE IN THE LATEST HIGH DENSITY D-SUBMINIATURE PRODUCT PUBLICATION. VISIT CONNECTPOSITRONIC.COM/PRODUCTS/59/HIGHDENSITYD-SUBMINIATURE OR CONNECTPOSITRONIC.COM.
3. CONNECTORS ARE ROHS COMPLIANT PER ROHS DIRECTIVE 2002/95/EC OF 27 JAN 2003.
4. DIMENSIONS ARE IN INCHES [MILLIMETERS].



POSITRONIC
INDUSTRIES INC.
www.connectpositronic.com

FSCM 28198



DECIMAL TOL.
± 0.015 [0.38]

DD SERIES

SCALE
N.T.S.

YK

TITLE

DD26M1000X/AA

DATE

8-9-05

DRAWING NUMBER

SK6443

REV.

A