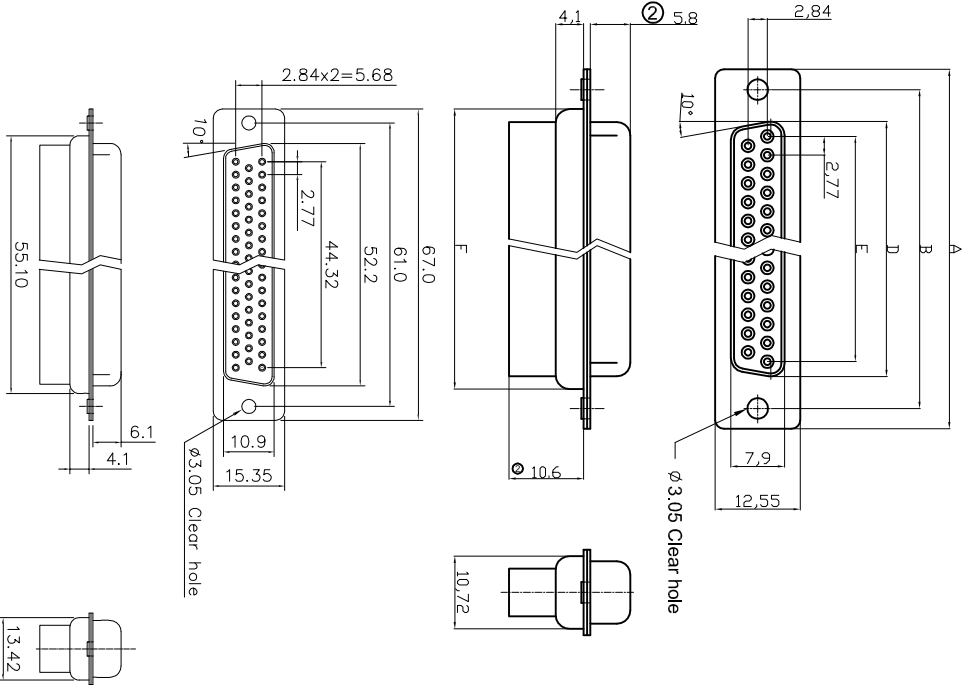


	1	2	3	4	5	6	7																																																															
A	RoHS compliant Unit: mm  File No.: E198287  ② Dimensions <table><thead><tr><th>Positions</th><th>A</th><th>B</th><th>D</th><th>E</th><th>F</th></tr></thead><tbody><tr><td>09</td><td>30.81</td><td>24.99</td><td>16.33</td><td>11.08</td><td>19.02</td></tr><tr><td>15</td><td>39.20</td><td>33.30</td><td>24.70</td><td>19.39</td><td>27.70</td></tr><tr><td>25</td><td>53.05</td><td>47.04</td><td>38.40</td><td>33.24</td><td>41.10</td></tr><tr><td>37</td><td>69.40</td><td>63.50</td><td>54.80</td><td>49.86</td><td>57.30</td></tr></tbody></table> ③ NOTES: MATERIAL 1. Insulator Material: Glass-filled thermoplastic PBT, UL94V-0 rated 2. Contact Material: Brass or Phosphor Bronze 3. Shell : Steel, 100 μ" Tin Over 50μ" min Nickel 4. Clinch Nut: Brass, 100μ" min Nickel Plated 5. Boardlock: Brass, 100μ" min Nickel Plated 6. Screwlock: Brass, 100μ" min Nickel Plated ELECTRICAL 1. Current Rating : 3 AMP 2. Voltage Rating : 250V AC/rms 60Hz 3. Contact Resistance: 20mΩ Max at 1 AMP DC 4. Insulation Resistance: 1000MΩ at 500 VDC 5. Withstand Voltage: 1000V AC/rms 60Hz for 1 minute ② ③ ⑥. Operating Temperature: -55°C to +105°C							Positions	A	B	D	E	F	09	30.81	24.99	16.33	11.08	19.02	15	39.20	33.30	24.70	19.39	27.70	25	53.05	47.04	38.40	33.24	41.10	37	69.40	63.50	54.80	49.86	57.30																																	
Positions								A	B	D	E	F																																																										
09								30.81	24.99	16.33	11.08	19.02																																																										
15								39.20	33.30	24.70	19.39	27.70																																																										
25								53.05	47.04	38.40	33.24	41.10																																																										
37	69.40	63.50	54.80	49.86	57.30																																																																	
B																																																																						
C																																																																						
D																																																																						
E																																																																						
F																																																																						
G	<table><thead><tr><th>Scale</th><th>Free</th><th></th><th></th><th></th><th></th><th></th></tr></thead><tbody><tr><td colspan="2">TOLERANCE</td><td></td><td></td><td></td><td>Date</td><td>Name</td></tr><tr><td>X.</td><td>±0.38</td><td></td><td></td><td>Drawn</td><td>22.12.2008</td><td>Dean</td></tr><tr><td>X.X</td><td>±0.25</td><td>⑤ Add this 50 poles drawing</td><td>27.02.2015</td><td>Winnie</td><td></td><td></td></tr><tr><td>X.XX</td><td>±0.13</td><td>③ Update operating temperature</td><td>26.05.2014</td><td>Amy</td><td></td><td></td></tr><tr><td>DIM</td><td>TOL</td><td>② Update</td><td>09.08.2012</td><td>Winnie</td><td></td><td></td></tr><tr><td>X. °</td><td>±3°</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>X.X°</td><td>±1.0°</td><td>① Drawn</td><td>22.12.2008</td><td>Dean</td><td></td><td></td></tr><tr><td>Angle</td><td>TOL</td><td>Id.</td><td>Modification</td><td>Date</td><td>Name</td><td></td></tr></tbody></table>						Scale	Free						TOLERANCE					Date	Name	X.	±0.38			Drawn	22.12.2008	Dean	X.X	±0.25	⑤ Add this 50 poles drawing	27.02.2015	Winnie			X.XX	±0.13	③ Update operating temperature	26.05.2014	Amy			DIM	TOL	② Update	09.08.2012	Winnie			X. °	±3°						X.X°	±1.0°	① Drawn	22.12.2008	Dean			Angle	TOL	Id.	Modification	Date	Name		
Scale	Free																																																																					
TOLERANCE					Date	Name																																																																
X.	±0.38			Drawn	22.12.2008	Dean																																																																
X.X	±0.25	⑤ Add this 50 poles drawing	27.02.2015	Winnie																																																																		
X.XX	±0.13	③ Update operating temperature	26.05.2014	Amy																																																																		
DIM	TOL	② Update	09.08.2012	Winnie																																																																		
X. °	±3°																																																																					
X.X°	±1.0°	① Drawn	22.12.2008	Dean																																																																		
Angle	TOL	Id.	Modification	Date	Name																																																																	
H	 ASSMANN WSW-No. A-DF CR/XX/FZ Customer-No. Drawing-No. ASS 1368 CO Replace rev04 Sheet																																																																					
1	2	3	4	5	6	7																																																																