
PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	NRN 47426	05/23	
			SEE PDM

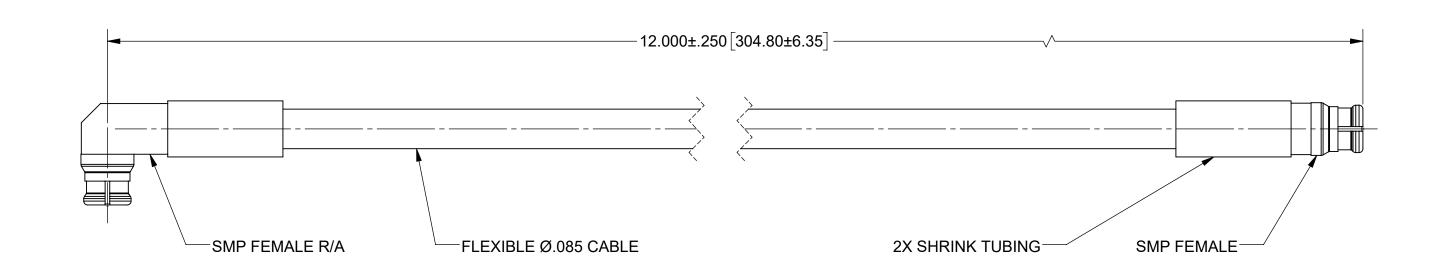

COMPONENTS:

SMP FEMALE R/A (1222-4005) CONNECTORS

SMP FEMALE (1221-4009)

FLEXIBLE Ø.085 CABLE (200-70-139) CABLE:

SHRINK TUBING: M23053/5

PERFORMANCE:

IMPEDANCE: FREQ. RANGE:

50 OHMS DC TO 40.0 GHz.

	MATERIAL:	SEE NOTES
	FINISH:	SEE NOTES

SURFACE AREA: N/A

PROPRIETARY

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.

DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' ±15'

DECIMAL: .X ±.030 .XX ±.010 .XXX ±.005

INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994

THIRD ANGLE PROJECTION

UNLESS OTHERWISE SPECIFIED

1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS]
2) ALL DIMENSIONS ARE AFTER PLATING,
3) BREAK CORNERS & EDGES 005 R. MAX.
4) CHAM. 1ST & LAST THREADS.
5) SURFACE ROUGHNESS 63-MIL-STD-10.
6) DIA: S ON COMMON CENTERS TO BE CONCENTRIC WITHIN. 005 T.I.R.
7) REMOVE ALL BURRS

DRAWN: KRR 05/10/23 CHECKED: SEE PDM APPROVED: SEE PDM

MICROWAVE

TITLE: SMP FEMALE R/A TO SMP FEMALE 12" CABLE ASSEMBLY FOR Ø.085 CABLE

7012-2098 В