
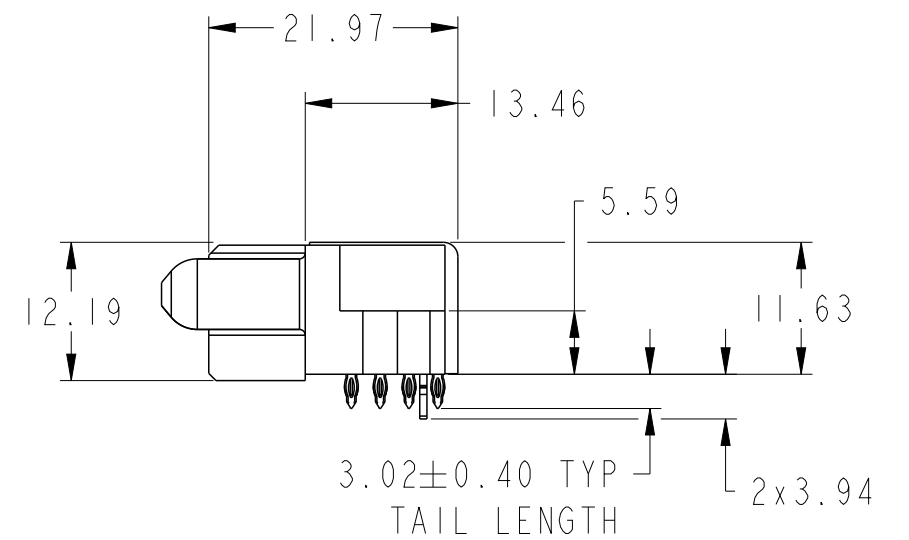
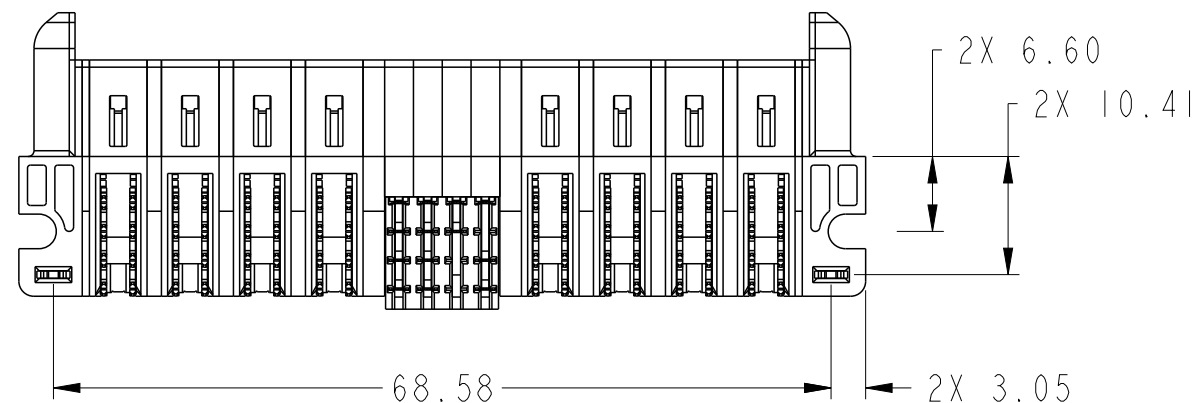
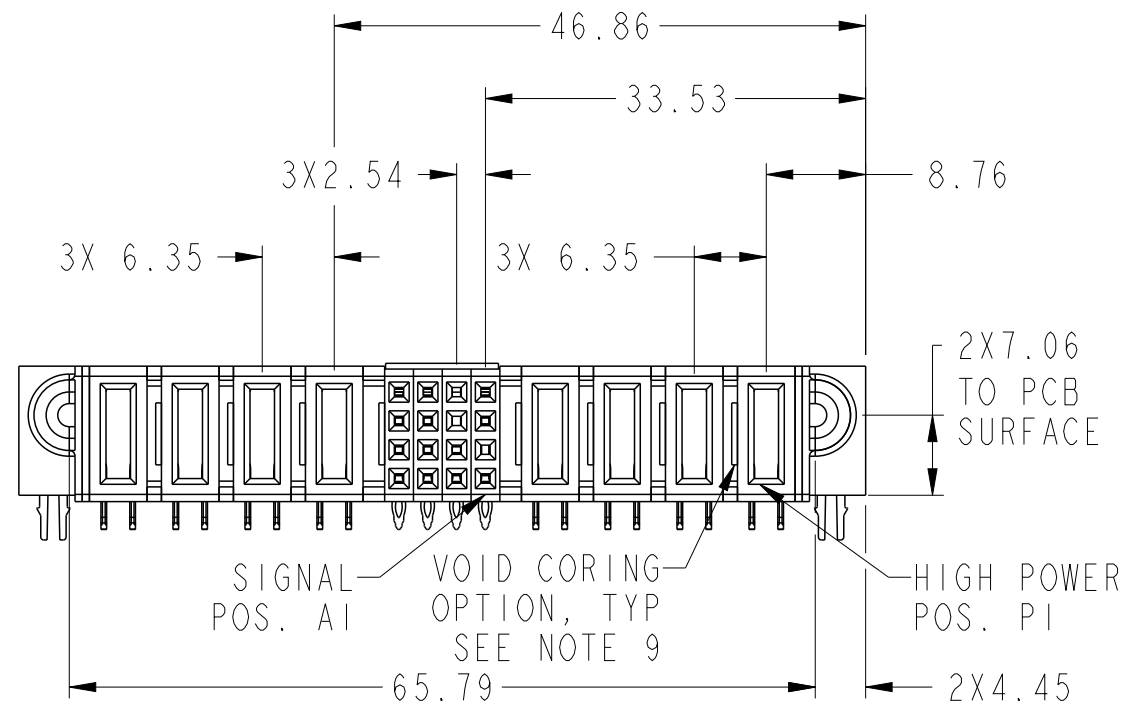


PRODUCT NUMBER SEE SHEET 2

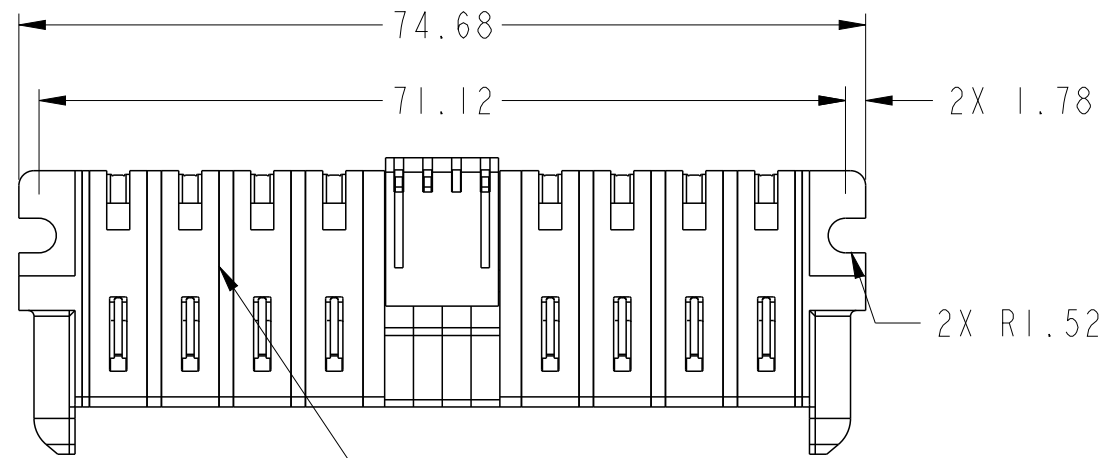

spec ref				dr	Peng-Bing Fu	2012/10/07	projection		size	A3	scale	3:2		
tolerance std ISO 406 ISO 1101	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Vicking Liu	2016/10/31					ecn no			ELX-DG-25114-1
				chr	Fancy Zhang	2016/11/02					rel level			Released
				appr	Pei-Ming Zheng	2016/11/02					product family			PwrBlade+
surface ISO 1302	linear	0.X	±0.5	Amphenol FCi	title 4HP 16S + 4HP RA RECEPTACLE PF				dwg no 10106127-8004001	rev B				
		0.XX	±0.25											
		0.XXX	±0.10											
	angular	0°	±2°		cat. no.		Product - Customer Drw				sheet 1 of 3			

NOTES:

- 1) PRODUCT MARK:
PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE .
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
-HOUSING : HIGH TEMP THERMOPLASTIC WITH GLASS FIBER, UL94V-0, BLACK.
-POWER CONTACT : HIGH CONDUCTIVITY COPPER ALLOY.
-SIGNAL CONTACT : COPPER ALLOY.
- 3) PLATING SPECIFICATION : 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS ARE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15+/-0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN SN
OVER 0.0254-0.0762MM CU PLATING TO ACHIEVE A 1.02+/-0.07MM HOLE.
- 8) THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY
REGULATIONS AS DESCRIBED IN GS-47-0004.
- 9) THE VOID CORING IN BETWEEN POWER MODULES, SIGNAL MODULES AND
END MODULES ARE OPTIONAL AND THE SHAPE MAY BE DIFFERENT FOR
OPTIMIZE THE MOLDING PROCESS. THE VOID CORING WILL NOT EFFECT
TO PRODUCT FUNCTION.
- 10) PRODUCT SPECIFICATION : GS-12-658.
APPLICATION SPECIFICATION : GS-20-141.
PRODUCT PACKAGE SPECIFICATION: GS-14-1502.

spec ref				dr		Peng-Bing Fu	2012/10/07		projection		MM		size		A3	scale		3:2			
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED				eng		Vicking Liu		2016/10/31						ecn no ELX-DG-25114-1					
ISO 406						chr		Fancy Zhang		2016/11/02											
ISO 1101						appr		Pei-Ming Zheng		2016/11/02											
														product family		PwrBlade+		rel level		Released	
surface		linear		0.X		±0.5		Amphenol FCI		title		4HP 16S + 4HP		dwg no		10106127-8004001		rev		B	
				0.XX		±0.25															
				0.XXX		±0.10															
		ISO 1302		angular		0°															