


D

C


-

A[illegible]


1471-9 (1/15)

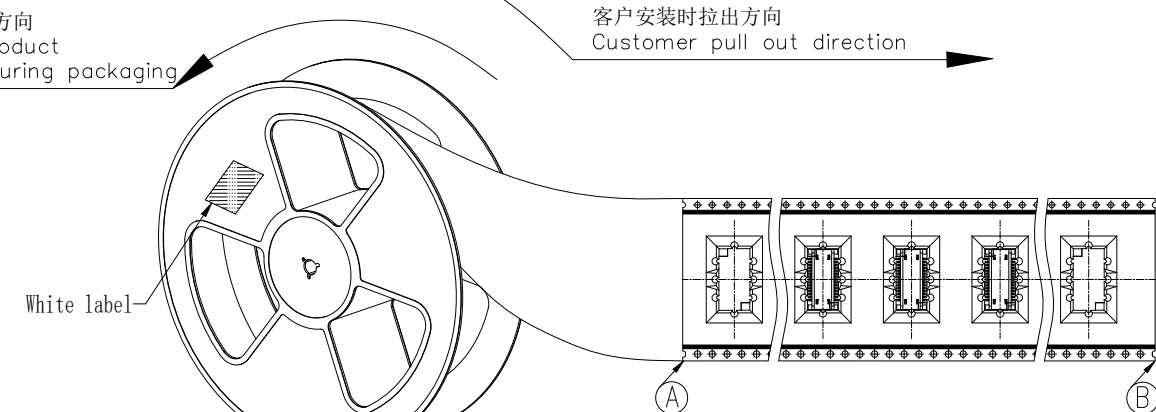

Before package, pay attention to leave more than 160mm(min) empty, after put the products into the carrier groove, packing with the cover bend then,
Note: the tension between tape and cover bend is 30g~120g




Cutaway view

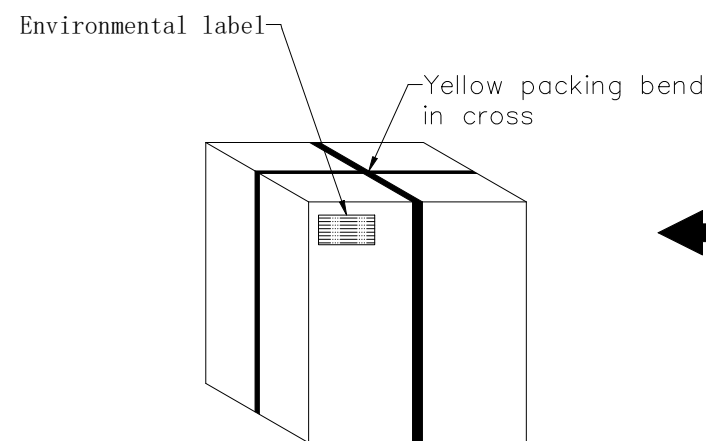


Outer Box: CTN-18K

No.4:
Seal,pack,label.

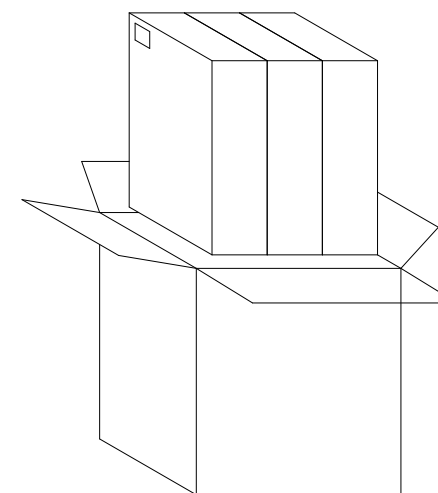

Put inner box into outer box,
(3pcs inner box/outer box)
pay attention to the unified label direction.

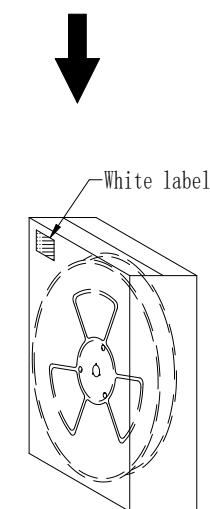

Inner Box: CTN-18E

Pack the reel in the PE-32 waterproof bag packing,
put 1pcs drying agent,
seal it with vacuum machine and
put it into the inner box,
seal it with sealing glue, with labels.

PIN	TE P/N	W	S	F	PCS/Reel	PCS/Inner Box	PCS/Outer Box
30	2487888-3	44.0±0.30	40.40±0.15	20.20±0.15	110	220	660
40	2487888-4	56.0±0.30	52.40±0.15	26.20±0.15	110	110	330
50	2487888-5	56.0±0.30	52.40±0.15	26.20±0.15	110	110	330
60	2487888-6	56.0±0.30	52.40±0.15	26.20±0.15	110	110	330
70	2487888-7	56.0±0.30	52.40±0.15	26.20±0.15	110	110	330
80	2487888-8	72.0±0.30	68.40±0.15	34.20±0.15	110	110	330
100	1-2487888-0	72.0±0.30	68.40±0.15	34.20±0.15	110	110	330
120	1-2487888-2	88.0±0.30	84.40±0.15	42.20±0.15	110	110	330

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN SUJANJAL 26JUN2024		 TE Connectivity	
		CHK SUJANJAL 26JUN2024			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 0.50 1 PLC ± 0.30 2 PLC ± 0.20 3 PLC ± — 4 PLC ± — ANGLES ± 1°		APVD SATHISH 26JUN2024 NAME 0.8MM BOARD TO BOARD CONN. PLUG SMT TYPE H=19.75MM	
		PRODUCT SPEC APPLICATION SPEC —		SIZE A2	
MATERIAL —		WEIGHT 0		CAGE CODE 00779	
FINISH —		CUSTOMER DRAWING		DRAWING NO C-2487888	
				RESTRICTED TO —	
				SCALE 1:1	
				SHEET 2 of 2	
				REV A1	