


# CGHV60040D

40 W, 6.0 GHz, GaN HEMT Die

## Description

Wolfspeed's CGHV60040D is a gallium nitride (GaN) High Electron Mobility Transistor (HEMT). GaN has superior properties compared to silicon or gallium arsenide, including higher breakdown voltage, higher saturated electron drift velocity, and higher thermal conductivity. GaN HEMTs offer greater power density and wider bandwidths compared to Si and GaAs transistors.

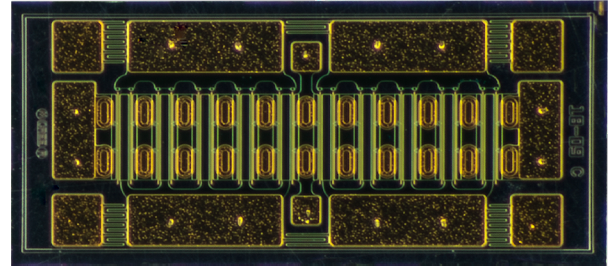

PN: CGHV60040D

## Features

- 18 dB Typical Small Signal Gain at 4 GHz
- 17 dB Typical Small Signal Gain at 6 GHz
- 65% Typical Power Added Efficiency
- 40 W Typical  $P_{SAT}$
- 50 V Operation
- High Breakdown Voltage
- Up to 6 GHz Operation

## Applications

- Cellular Infrastructure
- Class A, AB, Linear amplifiers suitable for OFDM, W-CDMA, EDGE, CDMA waveforms

## Packaging Information



- Bare die are shipped in Gel-Pak® containers
- Non-adhesive tacky membrane immobilizes die during shipment

 Large Signal Models Available for ADS and MWO





## Absolute Maximum Ratings (not simultaneous)

| Parameter                                                    | Symbol          | Rating    | Units    | Conditions               |
|--------------------------------------------------------------|-----------------|-----------|----------|--------------------------|
| Drain-Source Voltage                                         | $V_{DS}$        | 150       | $V_{DC}$ | 25°C                     |
| Gate-Source Voltage                                          | $V_{GS}$        | -10, +2   |          |                          |
| Storage Temperature                                          | $T_{STG}$       | -65, +150 | °C       |                          |
| Operating Junction Temperature                               | $T_J$           | 225       |          |                          |
| Maximum Drain Current <sup>1</sup>                           | $I_{DMAX}$      | 3.2       | A        | 25°C                     |
| Maximum Forward Gate Current                                 | $I_{GMAX}$      | 5.2       | mA       |                          |
| Thermal Resistance, Junction to Case (packaged) <sup>2</sup> | $R_{\theta JC}$ | 5.10      | °C/W     | 85°C, 20.8 W Dissipation |
| Thermal Resistance, Junction to Case (die only)              |                 | 3.27      |          |                          |
| Mounting Temperature                                         | $T_s$           | 320       | °C       | 30 seconds               |

Notes:

<sup>1</sup> Current limit for long term, reliable operation

<sup>2</sup> Eutectic die attach using 80/20 AuSn mounted to a 10 mil thick Cu15Mo85 carrier

## Electrical Characteristics (Frequency = 6 GHz unless otherwise stated; $T_c = 25^\circ\text{C}$ )

| Characteristics                       | Symbol     | Min. | Typ. | Max.   | Units    | Conditions                                                                                                      |
|---------------------------------------|------------|------|------|--------|----------|-----------------------------------------------------------------------------------------------------------------|
| <b>DC Characteristics</b>             |            |      |      |        |          |                                                                                                                 |
| Gate Pinch-Off Voltage                | $V_P$      | -3.8 | -3.0 | -2.3   | V        | $V_{DS} = 10\text{ V}$ , $I_D = 5.2\text{ mA}$                                                                  |
| Drain Current <sup>1</sup>            | $I_{DSS}$  | 4.2  | 5.2  | —      | A        | $V_{DS} = 6\text{ V}$ , $V_{GS} = 2.0\text{ V}$                                                                 |
| Drain-Source Breakdown Voltage        | $V_{BR}$   | 125  | —    | —      | V        | $V_{GS} = -8\text{ V}$ , $I_D = 5.2\text{ mA}$                                                                  |
| On Resistance                         | $R_{ON}$   | —    | 0.56 | —      | $\Omega$ | $V_{DS} = 0.1\text{ V}$                                                                                         |
| Gate Forward Voltage                  | $V_{G-ON}$ | —    | 1.9  | —      | V        | $I_{GS} = 5.2\text{ mA}$                                                                                        |
| <b>RF Characteristics</b>             |            |      |      |        |          |                                                                                                                 |
| Small Signal Gain                     | $G_{SS}$   | —    | 17   | —      | dB       | $V_{DD} = 50\text{ V}$ , $I_{DQ} = 65\text{ mA}$                                                                |
| Saturated Power Output <sup>2,3</sup> | $P_{SAT}$  | —    | 40   | —      | W        |                                                                                                                 |
| Drain Efficiency <sup>4</sup>         | $\eta$     | —    | 65   | —      | %        | $V_{DD} = 50\text{ V}$ , $I_{DQ} = 65\text{ mA}$ , $P_{SAT} = 40\text{ W}$                                      |
| Intermodulation Distortion            | IM3        | —    | -30  | —      | dBc      | $V_{DD} = 50\text{ V}$ , $I_{DQ} = 65\text{ mA}$ , $P_{OUT} = 40\text{ W PEP}$                                  |
| Output Mismatch Stress                | VSWR       | —    | —    | 10 : 1 | $\Psi$   | No damage at all phase angles,<br>$V_{DD} = 50\text{ V}$ , $I_{DQ} = 65\text{ mA}$ , $P_{OUT} = 40\text{ W CW}$ |
| <b>Dynamic Characteristics</b>        |            |      |      |        |          |                                                                                                                 |
| Input Capacitance                     | $C_{GS}$   | —    | 7.1  | —      | pF       | $V_{DS} = 50\text{ V}$ , $V_{GS} = -8\text{ V}$ , $f = 1\text{ MHz}$                                            |
| Output Capacitance                    | $C_{DS}$   | —    | 1.6  | —      |          |                                                                                                                 |
| Feedback Capacitance                  | $C_{GD}$   | —    | 0.15 | —      |          |                                                                                                                 |

Notes:

<sup>1</sup> Scaled from PCM data


<sup>2</sup>  $P_{SAT}$  is defined as  $I_G = 0.52\text{ mA}$

<sup>3</sup> Pulsed 100 $\mu\text{sec}$ , 10%

<sup>4</sup> Drain Efficiency =  $P_{OUT} / P_{DC}$



DIE Dimensions (units in microns)

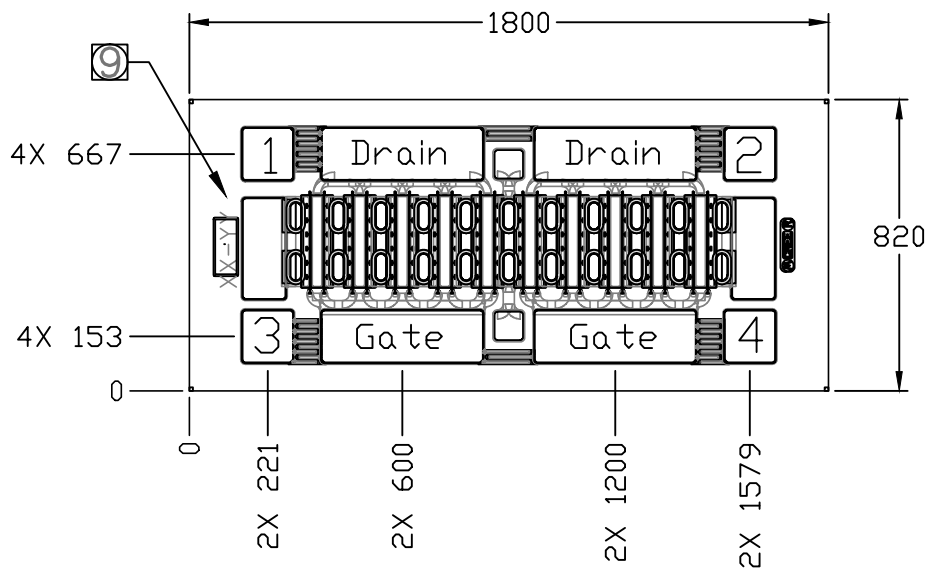

| Pad          | Size (microns) |
|--------------|----------------|
| Drain        | 464 x 156      |
| Gate         | 464 x 156      |
| Interconnect | 156 x 152      |

Overall die size 1800 x 820 (+0/-50) microns, die thickness 100 microns.  
All Gate and Drain pads must be wire bonded for electrical connection.


Assembly Notes:

- Recommended solder is AuSn (80/20) solder. Refer to Wolfspeed’s website for the Eutectic Die Bond Procedure application note at <https://www.wolfspeed.com/rf/document-library>
- Vacuum collet is the preferred method of pick-up.
- The backside of the die is the Source (ground) contact.
- Die back side gold plating is 5 microns thick minimum.
- Thermosonic ball or wedge bonding are the preferred connection methods.
- Gold wire must be used for connections.
- Use the die label (XX-YY) for correct orientation.


Electrostatic Discharge (ESD) Classifications

| Parameter        | Symbol | Class | Classification Level           | Test Methodology    |
|------------------|--------|-------|--------------------------------|---------------------|
| Human Body Model | HBM    | TBD   | ANSI/ESDA/JEDEC JS-001 Table 3 | JEDEC JESD22 A114-D |

## Typical Performance

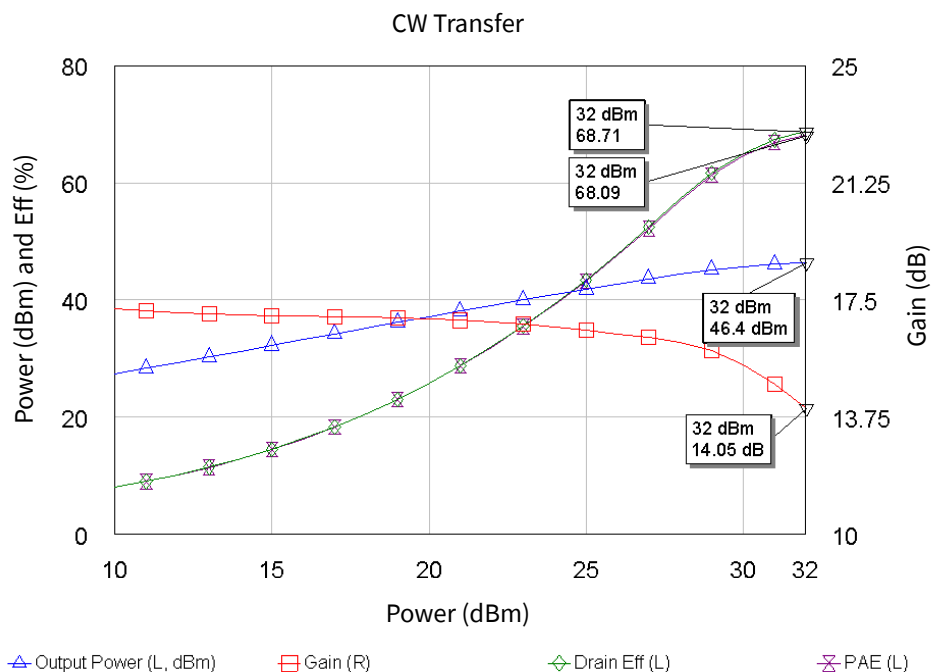

**Figure 1.** CGHV60040D Output Power, Gain and Efficiency vs Input Power at  $T_{CASE} = 25^{\circ}\text{C}$   
 $V_{DD} = 50\text{ V}$ ,  $I_{DQ} = 65\text{ mA}$ , Frequency = 2.7 GHz

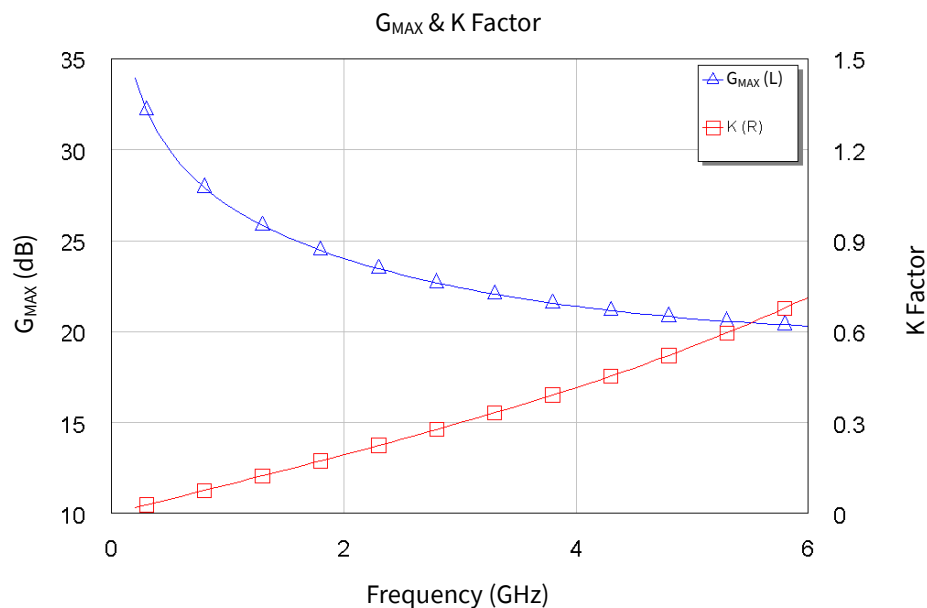

**Figure 2.** CGHV60040D  $G_{MAX}$  and K Factor vs. Frequency at  $T_{CASE} = 25^{\circ}\text{C}$   
 $V_{DD} = 50\text{ V}$ ,  $I_{DQ} = 500\text{ mA}$



## Typical Die S-Parameters (Small Signal, $V_{DS} = 50\text{ V}$ , $I_{DQ} = 65\text{ mA}$ , magnitude/angle)

| Frequency | Mag S11 | Ang S11 | Mag S21 | Ang S21 | Mag S12 | Ang S12 | Mag S22 | Ang S22 |
|-----------|---------|---------|---------|---------|---------|---------|---------|---------|
| 0.500     | 0.935   | -124.81 | 17.697  | 105.17  | 0.018   | 16.26   | 0.468   | -61.04  |
| 0.600     | 0.932   | -132.78 | 15.111  | 99.07   | 0.019   | 10.39   | 0.461   | -66.42  |
| 0.700     | 0.930   | -138.77 | 13.108  | 93.98   | 0.019   | 5.52    | 0.462   | -71.19  |
| 0.800     | 0.929   | -143.42 | 11.520  | 89.59   | 0.019   | 1.35    | 0.468   | -75.54  |
| 0.900     | 0.929   | -147.12 | 10.235  | 85.69   | 0.019   | -2.32   | 0.478   | -79.56  |
| 1.000     | 0.929   | -150.12 | 9.175   | 82.18   | 0.019   | -5.62   | 0.491   | -83.30  |
| 1.100     | 0.930   | -152.61 | 8.287   | 78.96   | 0.018   | -8.62   | 0.506   | -86.79  |
| 1.200     | 0.931   | -154.70 | 7.532   | 75.98   | 0.018   | -11.38  | 0.521   | -90.07  |
| 1.300     | 0.932   | -156.49 | 6.884   | 73.19   | 0.018   | -13.94  | 0.537   | -93.16  |
| 1.400     | 0.933   | -158.04 | 6.320   | 70.57   | 0.018   | -16.34  | 0.553   | -96.07  |
| 1.500     | 0.934   | -159.39 | 5.827   | 68.10   | 0.018   | -18.59  | 0.570   | -98.82  |
| 1.600     | 0.936   | -160.58 | 5.391   | 65.75   | 0.017   | -20.72  | 0.586   | -101.42 |
| 1.700     | 0.937   | -161.64 | 5.003   | 63.51   | 0.017   | -22.73  | 0.602   | -103.88 |
| 1.800     | 0.939   | -162.59 | 4.657   | 61.38   | 0.017   | -24.64  | 0.617   | -106.22 |
| 1.900     | 0.940   | -163.45 | 4.346   | 59.35   | 0.016   | -26.45  | 0.633   | -108.45 |
| 2.000     | 0.941   | -164.24 | 4.065   | 57.40   | 0.016   | -28.18  | 0.647   | -110.56 |
| 2.100     | 0.943   | -164.95 | 3.810   | 55.53   | 0.016   | -29.82  | 0.661   | -112.57 |
| 2.200     | 0.944   | -165.61 | 3.579   | 53.73   | 0.016   | -31.39  | 0.675   | -114.49 |
| 2.300     | 0.946   | -166.22 | 3.367   | 52.01   | 0.015   | -32.89  | 0.688   | -116.32 |
| 2.400     | 0.947   | -166.79 | 3.174   | 50.35   | 0.015   | -34.32  | 0.701   | -118.07 |
| 2.500     | 0.948   | -167.32 | 2.996   | 48.75   | 0.015   | -35.70  | 0.713   | -119.74 |
| 2.600     | 0.950   | -167.82 | 2.833   | 47.21   | 0.014   | -37.01  | 0.724   | -121.34 |
| 2.700     | 0.951   | -168.29 | 2.682   | 45.73   | 0.014   | -38.26  | 0.735   | -122.87 |
| 2.800     | 0.952   | -168.73 | 2.542   | 44.29   | 0.014   | -39.47  | 0.745   | -124.33 |
| 2.900     | 0.953   | -169.14 | 2.413   | 42.91   | 0.014   | -40.62  | 0.755   | -125.74 |
| 3.000     | 0.954   | -169.54 | 2.294   | 41.57   | 0.013   | -41.73  | 0.765   | -127.08 |
| 3.200     | 0.957   | -170.27 | 2.079   | 39.03   | 0.013   | -43.81  | 0.782   | -129.62 |
| 3.400     | 0.959   | -170.94 | 1.892   | 36.65   | 0.012   | -45.72  | 0.798   | -131.95 |
| 3.600     | 0.960   | -171.55 | 1.729   | 34.42   | 0.012   | -47.49  | 0.812   | -134.12 |
| 3.800     | 0.962   | -172.11 | 1.585   | 32.31   | 0.011   | -49.12  | 0.825   | -136.13 |
| 4.000     | 0.964   | -172.64 | 1.458   | 30.33   | 0.011   | -50.63  | 0.837   | -137.99 |
| 4.200     | 0.965   | -173.13 | 1.346   | 28.45   | 0.010   | -52.03  | 0.848   | -139.73 |
| 4.400     | 0.966   | -173.59 | 1.246   | 26.67   | 0.010   | -53.32  | 0.857   | -141.35 |
| 4.600     | 0.967   | -174.02 | 1.156   | 24.99   | 0.009   | -54.51  | 0.866   | -142.87 |
| 4.800     | 0.969   | -174.43 | 1.076   | 23.38   | 0.009   | -55.62  | 0.874   | -144.29 |
| 5.000     | 0.970   | -174.82 | 1.004   | 21.85   | 0.009   | -56.64  | 0.882   | -145.63 |
| 5.200     | 0.970   | -175.19 | 0.939   | 20.39   | 0.008   | -57.59  | 0.888   | -146.88 |
| 5.400     | 0.971   | -175.54 | 0.880   | 19.00   | 0.008   | -58.46  | 0.894   | -148.07 |
| 5.600     | 0.972   | -175.88 | 0.826   | 17.66   | 0.008   | -59.27  | 0.900   | -149.18 |
| 5.800     | 0.973   | -176.20 | 0.777   | 16.37   | 0.007   | -60.01  | 0.905   | -150.24 |
| 6.000     | 0.973   | -176.51 | 0.732   | 15.14   | 0.007   | -60.69  | 0.910   | -151.24 |

To download the s-parameters in s2p format, go to the [CGHV40320D](#) Product page and click on the documentation tab.



Part Number System

CGHV60040D

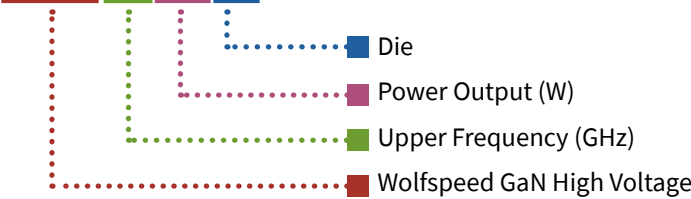


Table 1.

| Parameter                    | Value    | Units |
|------------------------------|----------|-------|
| Upper Frequency <sup>1</sup> | 6.0      | GHz   |
| Power Output                 | 40       | W     |
| Package                      | Bare Die | —     |


Note:  
<sup>1</sup> Alpha characters used in frequency code indicate a value greater than 9.9 GHz. See Table 2 for value.

Table 2.

| Character Code | Code Value                     |
|----------------|--------------------------------|
| A              | 0                              |
| B              | 1                              |
| C              | 2                              |
| D              | 3                              |
| E              | 4                              |
| F              | 5                              |
| G              | 6                              |
| H              | 7                              |
| J              | 8                              |
| K              | 9                              |
| Examples:      | 1A = 10.0 GHz<br>2H = 27.0 GHz |



Product Ordering Information

| Order Number | Description | Unit of Measure | Image                                                                               |
|--------------|-------------|-----------------|-------------------------------------------------------------------------------------|
| CGHV60040D   | GaN HEMT    | Each            |  |

**For more information, please contact:**

4600 Silicon Drive  
Durham, NC 27703 USA  
Tel: +1.919.313.5300  
[www.wolfsspeed.com/RF](http://www.wolfsspeed.com/RF)

Sales Contact  
[RFSales@wolfsspeed.com](mailto:RFSales@wolfsspeed.com)

RF Product Marketing Contact  
[RFMarketing@wolfsspeed.com](mailto:RFMarketing@wolfsspeed.com)

## Notes & Disclaimer

---

Specifications are subject to change without notice. “Typical” parameters are the average values expected by Wolfsspeed in large quantities and are provided for information purposes only. Wolfsspeed products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death. No responsibility is assumed by Wolfsspeed for any infringement of patents or other rights of third parties which may result from use of the information contained herein. No license is granted by implication or otherwise under any patent or patent rights of Wolfsspeed.

© 2014-2022 Wolfsspeed, Inc. All rights reserved. Wolfsspeed® and the Wolfstreak logo are registered trademarks and the Wolfsspeed logo is a trademark of Wolfsspeed, Inc.  
PATENT: <https://www.wolfsspeed.com/legal/patents>

*The information in this document is subject to change without notice.*