

MST

SMD current sensing resistor- metal strip



Applications

- Switched-mode power supply (SMPS)
- Voltage regulator module
- Power management
- Stepper motor drives


Environmental compliance




Product features

- Low sensing resistance
- 0603 (1608 metric) to 0805 (2013 metric)
- High power dissipation
- Moisture sensitivity level (MSL): 1


Table 1. Part numbering configuration scheme

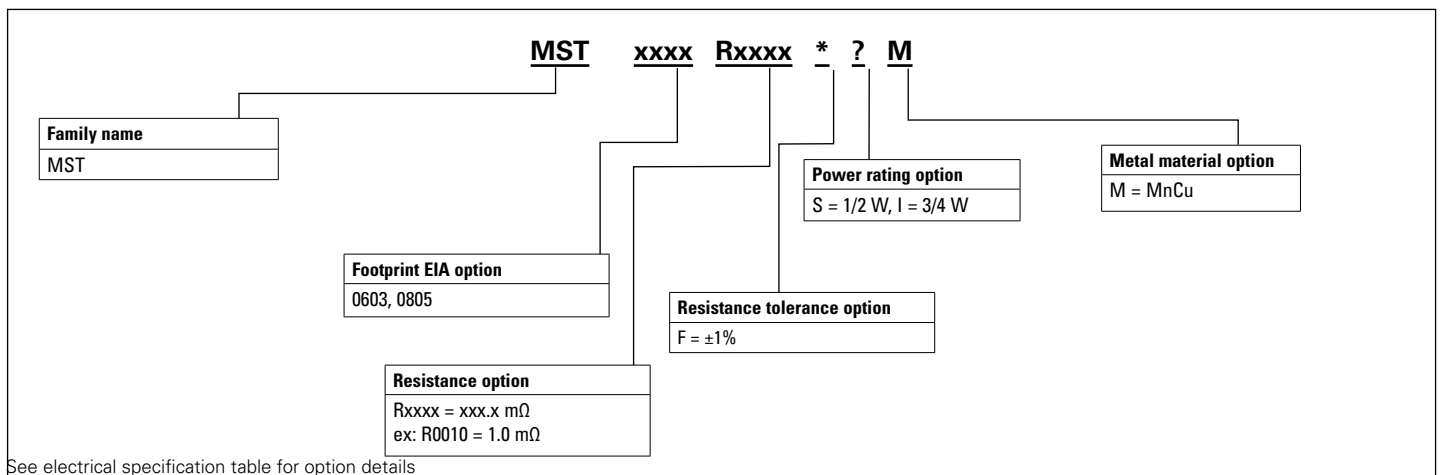

Mechanical parameters- Inches [mm]

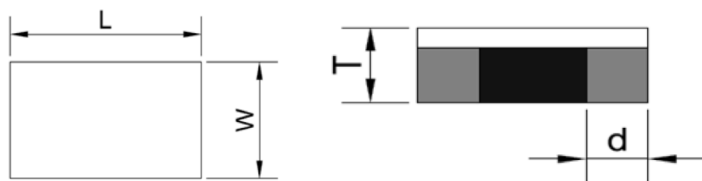


Construction

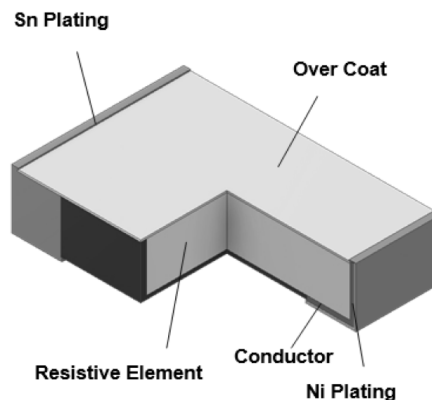

Family	Size code	L	W	d	T
MST0603 R = 1	0603 [1608]	0.063 ± 0.006 [1.60 ± 0.15]	0.031 ± 0.008 [0.08 ± 0.20]	0.024 ± 0.008 [0.60 ± 0.20]	0.016 ± 0.004 [0.40 ± 0.10]
MST0603 R > 1	0603 [1608]	0.063 ± 0.006 [1.60 ± 0.15]	0.031 ± 0.008 [0.08 ± 0.20]	0.014 ± 0.008 [0.35 ± 0.20]	0.016 ± 0.004 [0.40 ± 0.10]
MST0805 R ≤ 2	0805 [2013]	0.081 ± 0.006 [2.05 ± 0.15]	0.051 ± 0.008 [1.30 ± 0.20]	0.014 ± 0.008 [0.35 ± 0.20]	0.016 ± 0.004 [0.40 ± 0.10]
MST0805 R > 2	0805 [2013]	0.081 ± 0.006 [2.05 ± 0.15]	0.051 ± 0.008 [1.30 ± 0.20]	0.014 ± 0.008 [0.35 ± 0.20]	0.010 ± 0.004 [0.25 ± 0.10]

Recommended PCB layout- mm

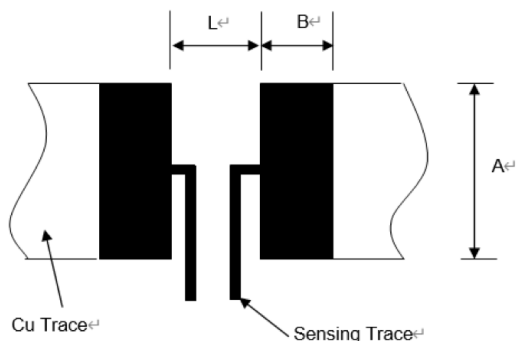

Family	Resistance (mΩ)	A	L	B
MST0603	R = 1	1.0	0.45	0.75
MST0603	R > 1	1.0	0.80	0.75
MST0805	1.5 ≤ R ≤ 3	1.4	0.80	1.2

1. The copper foil minimum thickness of PCB needs 3 oz.
2. PCB layout dimension tolerance is +/-0.1 mm.
3. The resistance will change slightly after soldered; it is dependent on PCB pad size design and it's necessary to consider the effect of the resistance increase or decrease.

Part marking

Family	Marking
MST0603	No marking
MST0805	No marking

Electrical specifications

Part number	Size	Resistance value mΩ (Part number code)	Resistance tolerance (Part number code)	Power rating (Part number code)	TCR (ppm/°C)	Operating temperature
MST0603Rxxx*?M	0603 (1608 metric)	1 (0010)	±1% (F)	1/2 W (S)	± 50	-55 °C to +155 °C
MST0603Rxxx*?M	0603 (1608 metric)	2 (0020)	±1% (F)	1/2 W (S)	± 50	-55 °C to +155 °C
MST0805Rxxx*?M	0805 (2013 metric)	1.5 (0015)	±1% (F)	3/4 W (I)	± 50	-55 °C to +155 °C
MST0805Rxxx*?M	0805 (2013 metric)	2 (0020)	±1% (F)	3/4 W (I)	± 50	-55 °C to +155 °C
MST0805Rxxx*?M	0805 (2013 metric)	3 (0030)	±1% (F)	3/4 W (I)	± 50	-55 °C to +155 °C

Rxxx = Enter resistance code option from table above xxx= resistance code (xxx.x mΩ ex: R0010 = 1.0 mΩ)

* = Enter resistance tolerance code option from table above (F= ±1%)

? = Enter power rating code option from table above (S = 1/2W, I = 3/4W)


M= MnCu (Metal material)

Packaging information- mm

Supplied in tape and reel on a 7.0" diameter reel (EIA-481 compliant)


Size	Tape	Quantity
0603	7 inch paper	5K
0805	7 inch paper	5K

Tape carrier and dimensions

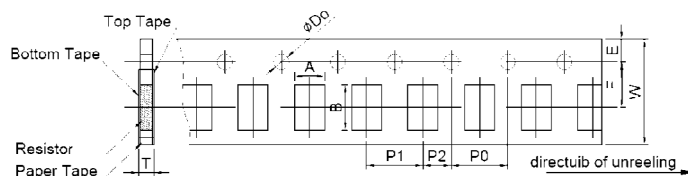

Dimension	0603	0805
E	1.75 ± 0.1	1.75 ± 0.1
F	3.5 ± 0.05	3.5 ± 0.05
P2	2.0 ± 0.1	2.0 ± 0.1
D0	1.50 ± 0.1	1.50 ± 0.1
P0	4.0 ± 0.1	4.0 ± 0.1
W	8.0 ± 0.1	8.0 ± 0.2
P1	4.0 ± 0.1	4.0 ± 0.1
A0	1.1 ± 0.1	1.6 ± 0.15
B0	1.9 ± 0.1	2.4 ± 0.2
T	0.64 ± 0.1	0.64 ± 0.1

Reel dimensions-mm

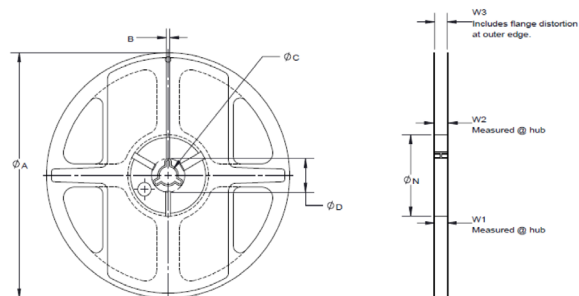


Size	A	B	C	D	N	W1	W2	W3
0603	178 ± 2.0	3.5 ± 0.5	13.0 ± 1.0	na	60 ± 1.0	9.0 ± 1.0	11.4 ± 1.0	na
0805	178 ± 2.0	3.5 ± 0.5	13.0 ± 1.0	na	60 ± 1.0	9.0 ± 1.0	11.4 ± 1.0	na

General specifications

Temperature coefficient of resistance: IEC 60115-1 4.8 JIS-C5201-4.8 +25 ° to +125 °C
Short time overload: IEC60115-1-4.13 JIS-C5201-4.13 5 X rated power for 5 s
Load life: IEC60115-1-4.25.1 JIS-C5201-4.25.1 1000 hours at rated power , +70 °C, 1.5 hours “ON ”, 0.5 hours “OFF”
Load life with humidity: IEC60115-1-4.24 JIS-C5201-4.24 1000 hours at rated power , +40 °C ± 2 °C, 90~95% RH 1.5 hours “ON ”, 0.5 hours “OFF”
Temperature cycling: IEC60115-1-4.19 JIS-C5201-4.19 -55 °C (30 minutes) / +125 °C (30 minutes) 1000 cycles
Resistance to soldering heat: IEC60115-1-4.18 JIS-C5201-4.18 +260 °C ± 5 °C solder , 10 seconds ± 1 second dwell .
Solderability: IEC60115-1-4.17 JIS-C5201-4.17 +245 °C ±5 °C solder, 2 seconds ±0.5 seconds dwell.
Board flex: IEC60115-1-4.33 JIS-C5201-4.33 Bending width 2 mm
High temperature exposure: IEC60115-1-4.23.2 JIS-C5201-4.23.2 +155 °C , 1000 hours
Low temperature storage: EC60115-1- 4.23.4 JIS-C5201-4.23.4 -55 °C, 1000 hours
Insulation Resistance: IEC60115-1-4.6 JIS-C5201-4.6 100 V DC for 1 minute

Temperature derating curve

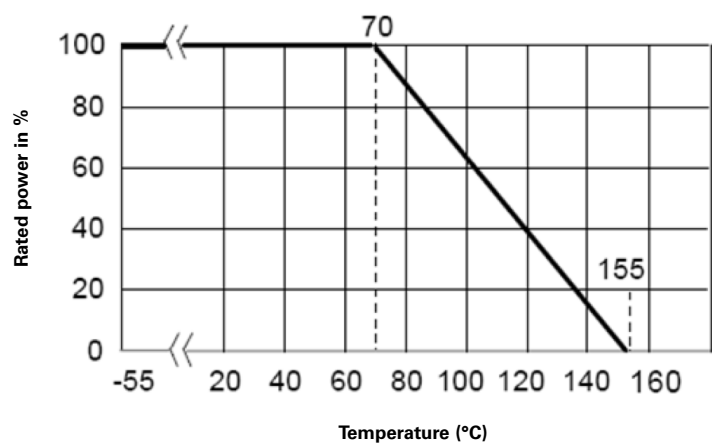

Rated current & voltage

The rated Current and Voltage are calculated by the following formula:

$I=\sqrt{P \div R}$

I: Rated current (A)

P: Rated power (W)

$V=\sqrt{P \times R}$

V: Rated voltage (V)

R: Resistance value (Ω)

Solder reflow profile

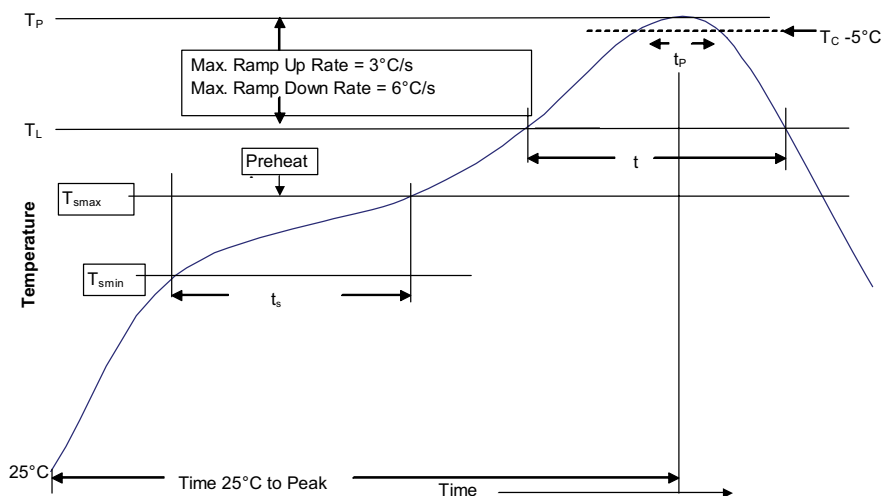


Table 1 - Standard SnPb solder (T_C)

Package thickness	Volume mm ³ <350	Volume mm ³ ≥350
<2.5 mm	235 °C	220 °C
≥2.5 mm	220 °C	220 °C

Table 2 - Lead (Pb) free solder (T_C)

Package thickness	Volume mm ³ <350	Volume mm ³ 350 - 2000	Volume mm ³ >2000
<1.6 mm	260 °C	260 °C	260 °C
1.6 – 2.5 mm	260 °C	250 °C	245 °C
>2.5 mm	250 °C	245 °C	245 °C

Reference J-STD-020

Profile feature	Standard SnPb solder	Lead (Pb) free solder
Preheat and soak		
• Temperature min. (T_{smin})	100 °C	150 °C
• Temperature max. (T_{smax})	150 °C	200 °C
• Time (T_{smin} to T_{smax}) (t_s)	60-120 seconds	60-150 seconds
Ramp up rate T_L to T_p	3 °C/ second max.	3 °C/ second max.
Liquidous temperature (T_L)	183 °C	217 °C
Time (t_L) maintained above T_L	60-150 seconds	60-120 seconds
Peak package body temperature (T_p)*	Table 1	Table 2
Time (t_p)* within 5 °C of the specified classification temperature (T_C)	20 seconds*	10 seconds*
Ramp-down rate (T_p to T_L)	6 °C/ second max.	6 °C/ second max.
Time 25 °C to peak temperature	6 minutes max.	8 minutes max.

* Tolerance for peak profile temperature (T_p) is defined as a supplier minimum and a user maximum.

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

Eaton
Electronics Division
1000 Eaton Boulevard
Cleveland, OH 44122
United States
Eaton.com/electronics

© 2022 Eaton
All Rights Reserved
Printed in USA
Publication No. ELX1184 BU-ELX22044
June 2022

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Follow us on social media to get the latest product and support information.

