


LUXEON IR Compact for Automotive Line

High power infrared emitters with automotive qualification, enabling the next level of design flexibility



The LUXEON IR Compact for Automotive Line high power infrared emitters are tailored to application needs by offering a variety of products at multiple infrared wavelengths. LUXEON IR Compact emitters are designed with innovative LUXEON technology to provide industry-leading performance. Through best-in-class thermal conductivity, LUXEON IR Compact for Automotive Line has excellent performance at actual operating conditions. All LUXEON IR Compact for Automotive Line LEDs are AEC-Q102 qualified.

FEATURES AND BENEFITS

Available in 850nm and 940nm wavelengths to provide optimized performance for each type of application

Radiant power: 1050mW (850nm) and 1150mW (940nm) for greater system performance

Compact package of 1.9mm x 1.37mm with a 2-pad configuration provides the highest power density in the industry for a new level of miniaturization

Ultra-low R_{th} of 2.8-3.1°C/W, the industry's best thermal conductivity, solves thermal challenges and supports space saving designs

PRIMARY APPLICATIONS

Driver Monitoring Systems

Biometric Identification

Lane Departure Systems

Night Vision Systems

Table of Contents

General Product Information	2
Product Test Conditions	2
Part Number Nomenclature	2
Radiometric Power Maintenance	2
Environmental Compliance	2
Performance Characteristics	3
Product Selection Guide	3
Optical Characteristics	3
Electrical and Thermal Characteristics	3
Absolute Maximum Ratings	4
Characteristic Curves	5
Spectral Power Distribution Characteristics	5
Light Output Characteristics	5
Forward Current Characteristics	6
Wavelength Shift Characteristics	7
Radiation Pattern Characteristics	7
Permissible Pulse Handling Characteristics	8
Product Bin and Labeling Definitions	9
Decoding Product Bin Labeling	9
Radiometric Power Bins	9
Peak Wavelength Bins	10
Forward Voltage Bins	10
Mechanical Dimensions	11
Reflow Soldering Guidelines	12
JEDEC Moisture Sensitivity	12
Solder Pad Design	13
Packaging Information	13
Pocket Tape Dimensions	13
Reel Dimensions	14

General Product Information

Product Test Conditions

LUXEON IR Compact for Automotive Line emitters are tested and binned with a 20ms monopulse of 1A at a junction temperature, T_j , of 25°C.

Part Number Nomenclature

Part numbers for LUXEON IR Compact for Automotive Line follow the convention below:

L 1 I Z – A **B B B** X X X X X X X X

Where:

B B B – designates nominal peak wavelength

X X X X X X X X – reserved for further customization

Therefore, the following part number is used for a LUXEON IR Compact for Automotive emitter with a peak wavelength of 850nm:

L 1 I Z – A **8 5 0** 0 0 0 0 0 0 0 0

Radiometric Power Maintenance

Please contact your local Sales Representative or Lumileds Technical Solutions Manager for more information about the long-term performance of this product.

Environmental Compliance

Lumileds LLC is committed to providing environmentally friendly products to the solid-state lighting market. LUXEON IR Compact for Automotive Line is compliant to the European Union directives on the restriction of hazardous substances in electronic equipment, namely the RoHS Directive 2011/65/EU and REACH Regulation (EC) 1907/2006. Lumileds LLC will not intentionally add the following restricted materials to its products: lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls (PBB) or polybrominated diphenyl ethers (PBDE).

Performance Characteristics

Product Selection Guide

Table 1. Product performance of LUXEON IR Compact for Automotive Line at 1000 mA, $T_j = 25^\circ\text{C}$

PEAK WAVELENGTH ^[1] (nm)	TYPICAL FWHM BEAM ANGLE (°)	RADIOMETRIC POWER ^[2] (mW)		TYPICAL RADIANT INTENSITY (mW/sr)	PART NUMBER
		MINIMUM	TYPICAL		
850	150	900	1050	250	L1IZ-A850000000000
940	150	1000	1150	300	L1IZ-A940000000000

Notes for Table 1:

1. Lumileds maintains a tolerance of ± 2 nm on peak wavelength measurements.
2. Lumileds maintains a tolerance of $\pm 7\%$ on radiometric power measurements.

Optical Characteristics

Table 2. Optical characteristics of the LUXEON IR Compact for Automotive Line at 1000 mA, $T_j = 25^\circ\text{C}$

PART NUMBER	PEAK WAVELENGTH ^[1] (nm)			TYPICAL SPECTRUM FWHM (nm)	TYPICAL TEMPERATURE COEFFICIENT OF PEAK WAVELENGTH ^[2] (nm/°C)
	MINIMUM	TYPICAL	MAXIMUM		
L1IZ-A850000000000	840	850	875	35	0.26
L1IZ-A940000000000	925	940	960	50	0.29

Notes for Table 2:

1. Lumileds maintains a tolerance of ± 2 nm on peak wavelength measurements.
2. Measured between 25°C and 85°C .

Electrical and Thermal Characteristics

Table 3. Thermal Characteristics for LUXEON IR Compact for Automotive derived from thermal transient measurements at 1000 mA (DC) and 25°C stage temperature.

PART NUMBER	THERMAL RESISTANCE JUNCTION-TO-CASE (K/W)				TYPICAL TEMPERATURE COEFFICIENT OF PEAK WAVELENGTH ^[3] (nm/°C)
	RΘ _{j-c} el ^[1]		RΘ _{j-c} real ^[2]		
	TYPICAL	MAXIMUM	TYPICAL	MAXIMUM	
L1IZ-A8500000000000	3.1	3.9	4.7	6.1	0.26
L1IZ-A9400000000000	2.8	3.6	4.7	6.1	0.29

Notes for Table 3:

1. Ratio between temperature difference (junction $\leftrightarrow$ case) and electrical input power (references JESD51-51, JESD51-14)
2. Ratio between temperature difference (junction $\leftrightarrow$ case) and dissipated heat, i.e. emitted light taken into account (references JESD51-51, JESD51-14)
3. Measured between 25°C and 85°C .

Table 4. Electrical characteristics for LUXEON IR Compact for Automotive Line at 1000 mA, $T_j = 25^\circ\text{C}$

PART NUMBER	FORWARD VOLTAGE ^[1] (V_f)			TYPICAL TEMPERATURE COEFFICIENT OF FORWARD VOLTAGE ^[2] (mV/°C)	TYPICAL RISE TIME (ns)	TYPICAL FALL TIME (ns)
	MINIMUM	TYPICAL	MAXIMUM			
L1IZ-A850000000000	2.7	3.1	3.7	-4.6	12	16
L1IZ-A940000000000	2.3	2.9	3.4	-2.6	12	16

Notes for Table 4:

1. Lumileds maintains a tolerance of $\pm 1\%$ on forward voltage measurements.
2. Measured between 25°C and 85°C .

Absolute Maximum Ratings

Table 5. Absolute maximum ratings for LUXEON IR Compact for Automotive Line

PARAMETER	MAXIMUM PERFORMANCE
DC Forward Current ^[1, 2]	1500 mA
Peak Pulsed Forward Current ^[1, 3]	5000 mA
Emitter Junction Temperature ^[1] (DC & Pulse)	145 °C
ESD Sensitivity (ANSI/ESDA/JEDEC JS-001-2012)	Class 3B
Operating Case Temperature ^[1]	-40 °C to 125 °C
Emitter Storage Temperature	-40 °C to 125 °C
SMD Process Classification Temperature	260 °C per JEDEC J-STD-020E
Allowable Reflow Cycles	3
Reverse Voltage (V_{reverse})	LUXEON IR LEDs are not designed to be driven in reverse bias

Notes for Table 5:

1. Proper current derating must be observed to maintain the junction temperature below the maximum allowable junction temperature.
2. Residual periodic variations due to power conversion from alternating current (AC) to direct current (DC), also called "ripple," are acceptable if the following conditions are met:
 - The frequency of the ripple current is 100Hz or higher
 - The average current for each cycle does not exceed the maximum allowable DC forward current
 - The maximum amplitude of the ripple does not exceed the maximum peak pulsed forward current
3. For pulse handling capability details see figure 9.

Characteristic Curves

Spectral Power Distribution Characteristics

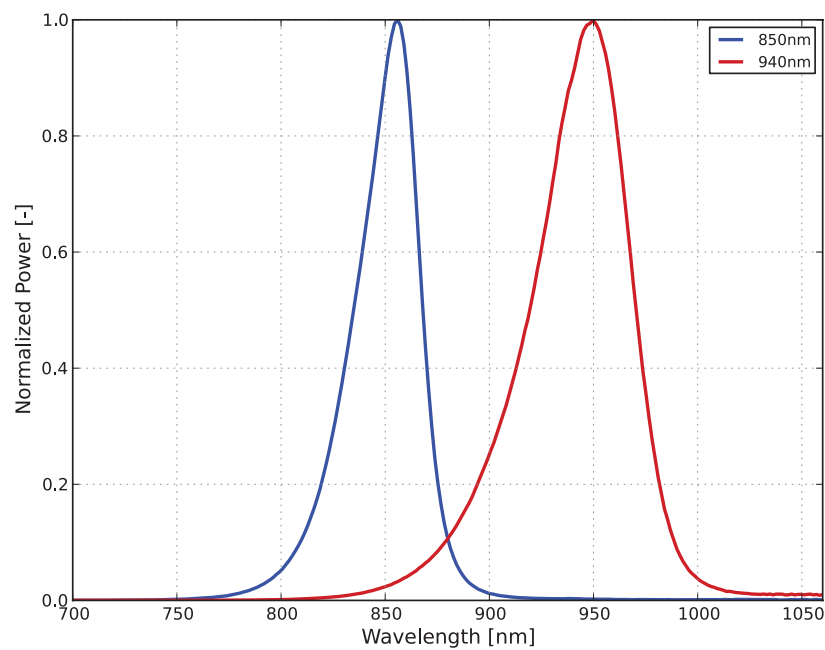


Figure 1. Typical normalized power vs. wavelength for LUXEON IR Compact for Automotive Line at 1A, $T_j = 25\text{ }^{\circ}\text{C}$

Light Output Characteristics

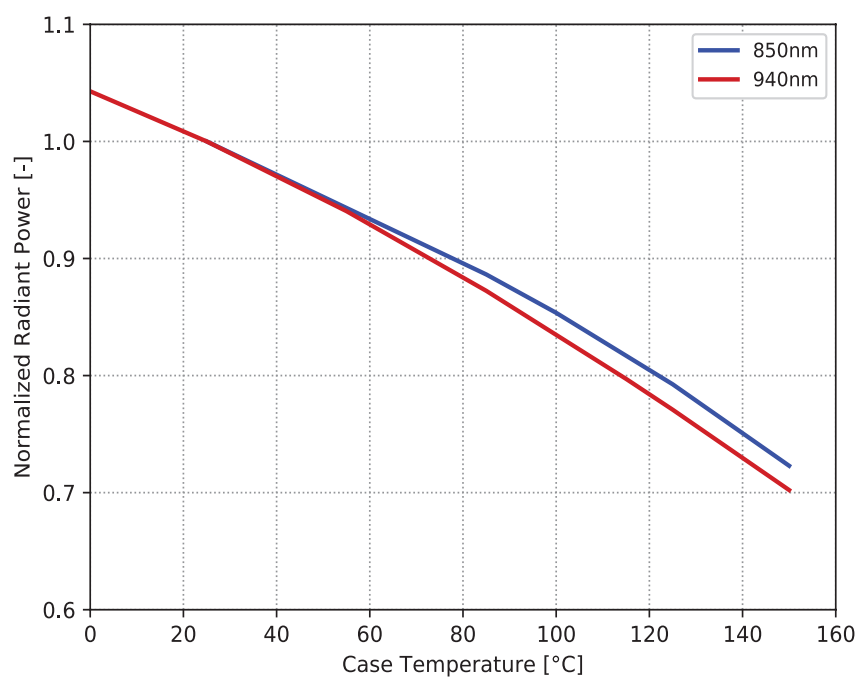


Figure 2. Typical normalized radiant power vs. case temperature for LUXEON IR Compact for Automotive Line at 1A

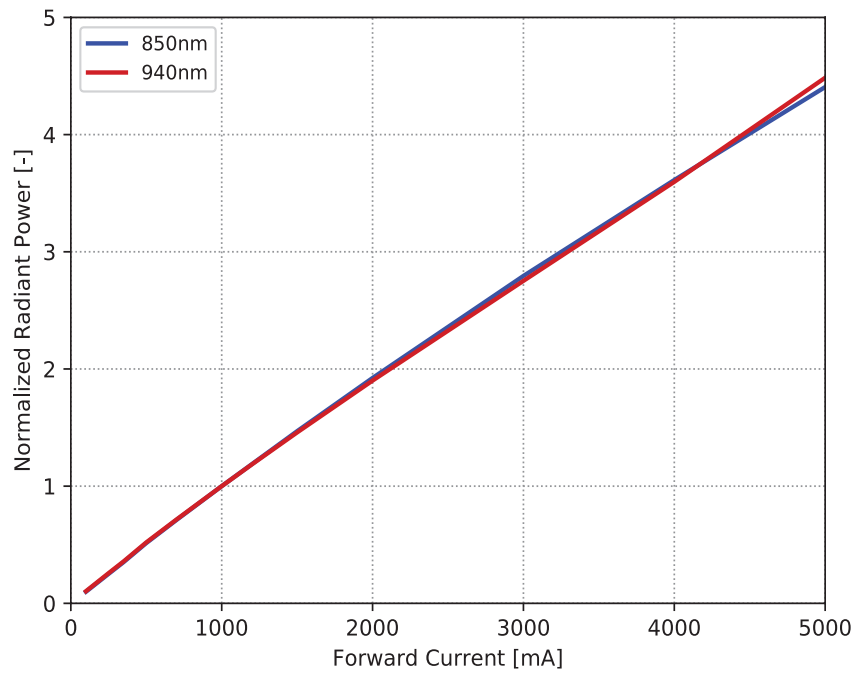


Figure 3. Typical normalized radiant power vs. forward current for LUXEON IR Compact for Automotive Line at $T_j = 25\text{ }^{\circ}\text{C}$

Forward Current Characteristics

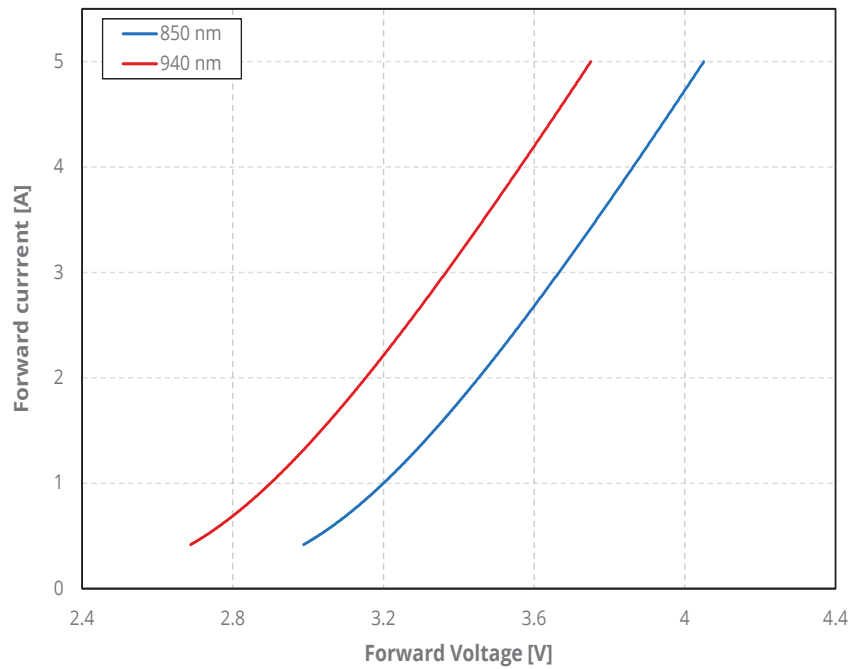


Figure 4. Typical forward current vs. forward voltage for LUXEON IR Compact for Automotive Line at $T_j = 25\text{ }^{\circ}\text{C}$

Wavelength Shift Characteristics

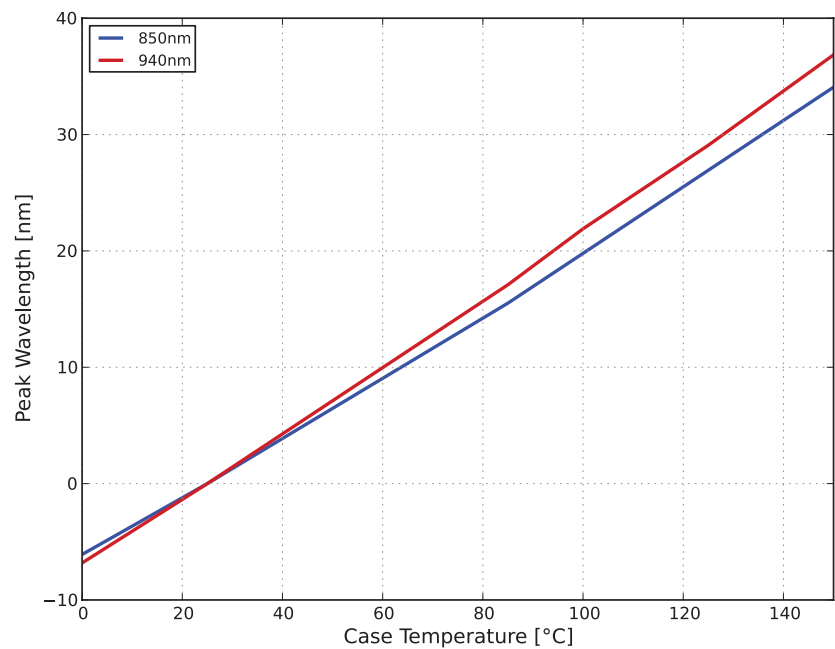


Figure 5. Typical peak wavelength shift vs. case temperature for LUXEON IR Compact for Automotive Line at 1A

Radiation Pattern Characteristics

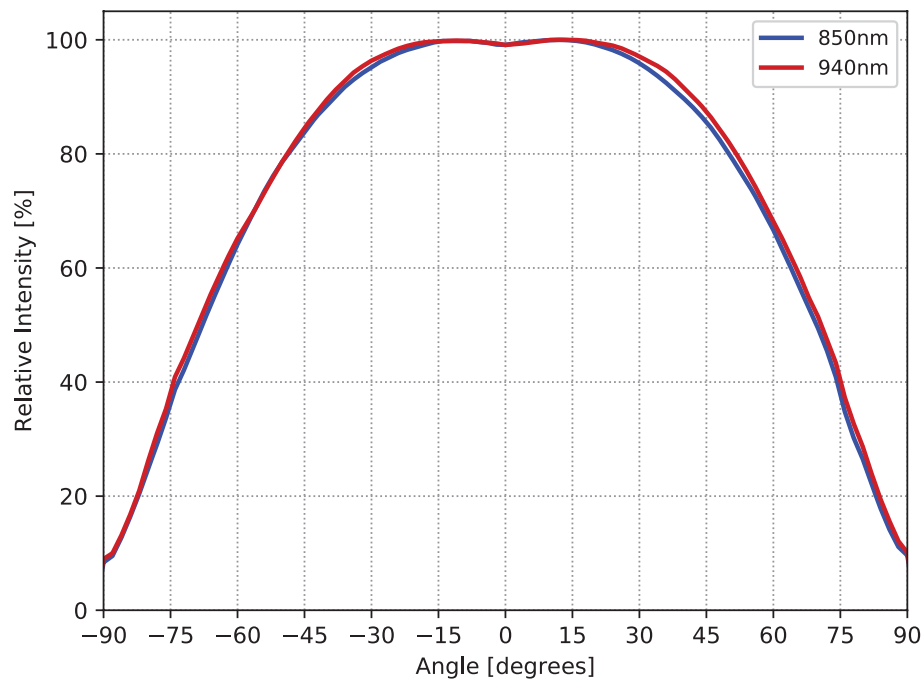


Figure 6. Typical radiation pattern for LUXEON IR Compact for Automotive Line at 1A, T_j = 25 °C

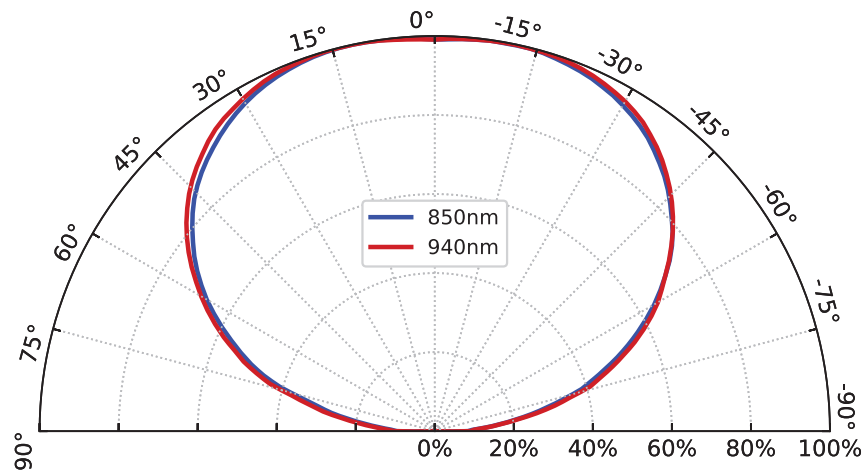


Figure 7. Typical polar radiation pattern for LUXEON IR Compact for Automotive Line at 1A, $T_j = 25\text{ }^{\circ}\text{C}$

Permissible Pulse Handling Characteristics

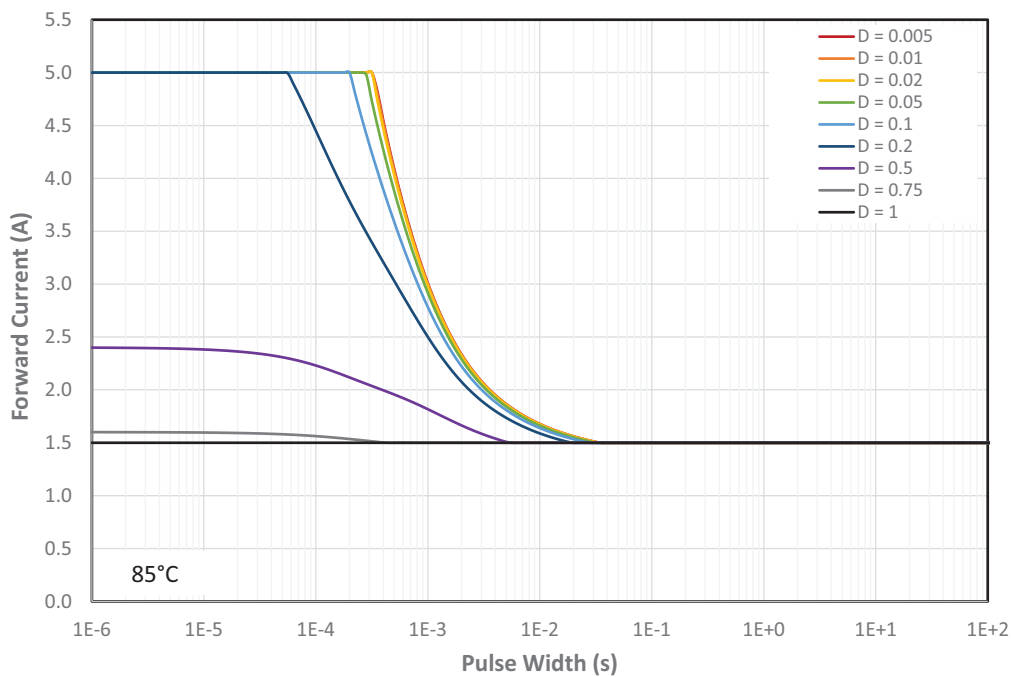


Figure 8. Permissible pulse handling capability for LUXEON IR Compact for Automotive Line at $T_c = 85\text{ }^{\circ}\text{C}$

Product Bin and Labeling Definitions

Decoding Product Bin Labeling

In the manufacturing of semiconductor products, there are variations in performance around the average values given in the technical datasheet. For this reason, Lumileds bins components for luminous flux or radiometric power, color point, peak or dominant wavelength and forward voltage.

LUXEON IR Compact for Automotive Line emitters are labeled using a 4-digit alphanumeric CAT code following the format below:

A B C D

Where:

- A** – designates radiometric power bin (example: J = 900 to 950 mW, N = 1200 to 1300 mW)
- B C** – designates peak wavelength bin (example: 8K = 845 nm to 850 nm, 9H = 935 nm to 940 nm)
- D** – designates forward voltage bin (example: D = 2.5 to 3.0 V, F = 3.5 to 4.0 V)

Therefore, a LUXEON IR Compact for Automotive emitter with a radiometric power range of 1200 to 1300 mW, peak wavelength range of 845 to 850 nm and a forward voltage range of 2.5 to 3.0 V has the following CAT code:

N 8 K D

Radiometric Power Bins

Table 6 lists the standard radiometric power bins for LUXEON IR Compact for Automotive Line emitters. Although several bins are outlined, product availability in a particular bin varies by production run and by product performance. Not all bins are available in all CCTs.

Table 6. Radiometric power bin definitions for LUXEON IR Compact for Automotive Line at 1A, $T_j = 25^\circ\text{C}$

BIN	RADIOMETRIC POWER ⁽¹⁾ (mW)	
	MINIMUM	MAXIMUM
J	900	950
K	950	1000
L	1000	1100
M	1100	1200
N	1200	1300
P	1300	1400
Q	1400	1500
R	1500	1600

Notes for Table 6:

1. Lumileds maintains a tolerance of $\pm 7\%$ on radiometric power measurements.

Peak Wavelength Bins

Table 7. Peak wavelength bins for LUXEON IR Compact for Automotive Line at 1A, $T_j = 25\text{ }^{\circ}\text{C}$

BIN	PEAK WAVELENGTH ⁽¹⁾ (nm)	
	MINIMUM	MAXIMUM
8J	840	845
8K	845	850
8L	850	855
8M	855	860
8N	860	865
8P	865	870
8Q	870	875
9D	915	920
9E	920	930
9F	925	930
9G	930	935
9H	935	940
9J	940	945
9K	945	950
9L	950	955
9M	955	960

Notes for Table 7:

1. Lumileds maintains a tolerance of $\pm 0.5\text{nm}$ on peak wavelength measurements.

Forward Voltage Bins

Table 8. Forward voltage bin definitions for LUXEON IR Compact for Automotive Line at 1A, $T_j = 25\text{ }^{\circ}\text{C}$

BIN	FORWARD VOLTAGE ⁽¹⁾ (V_f)	
	MINIMUM	MAXIMUM
C	2.0	2.5
D	2.5	3.0
E	3.0	3.5
F	3.5	4.0

Notes for Table 8:

1. Lumileds maintains a tolerance of $\pm 1\%$ on forward voltage measurements.

Mechanical Dimensions

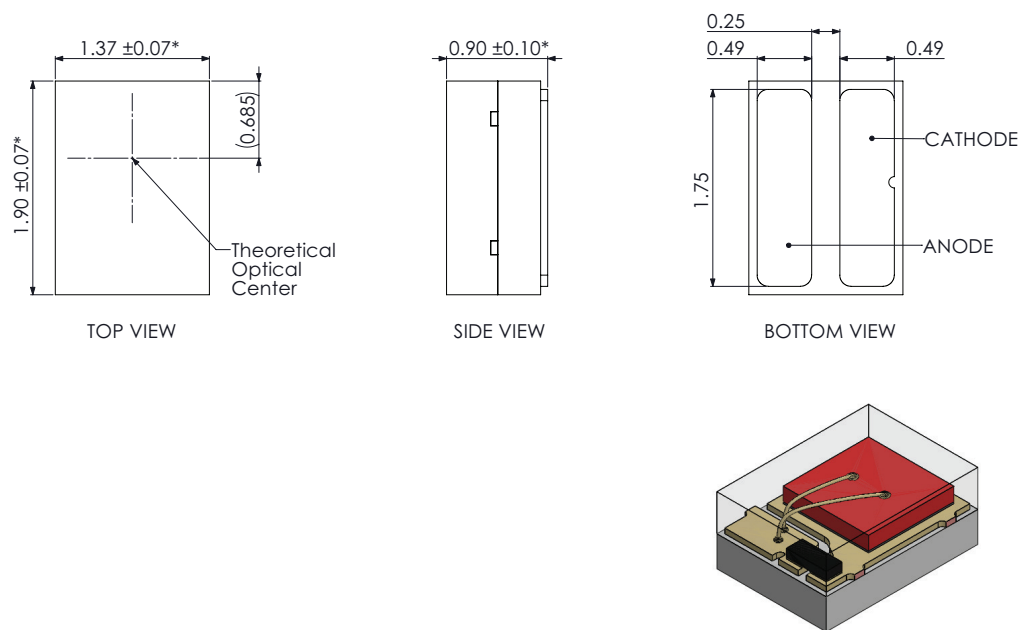


Figure 9. Mechanical dimensions for LUXEON IR Compact for Automotive Line

Notes for Figure 9:
1. Drawings are not to scale.
2. All dimensions are in millimeters.

Reflow Soldering Guidelines

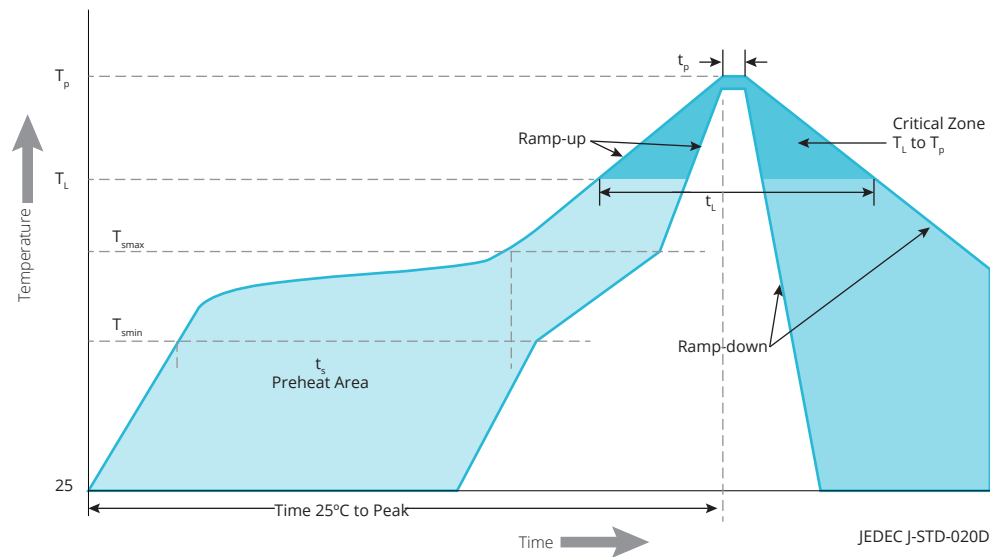


Figure 10. Visualization of the acceptable reflow temperature profile as specified in Table 8

Table 9. Reflow profile characteristics for LUXEON IR Compact for Automotive Line

PROFILE FEATURE	LEAD-FREE ASSEMBLY
Preheat Minimum Temperature (T_{smin})	150 °C
Preheat Maximum Temperature (T_{smax})	200 °C
Preheat Time (t_{smin} to t_{smax})	120 seconds
Ramp-Up Rate (T_L to T_p)	3 °C / second maximum
Liquidus Temperature (T_L)	217 °C
Time Maintained Above Temperature T_L (t_L)	150 seconds
Peak / Classification Temperature (T_p)	260 °C
Time Within 5°C of Actual Peak Temperature (t_p)	10 to 30 seconds
Ramp-Down Rate (T_p to T_L)	6 °C / second maximum
Time 25°C to Peak Temperature	8 minutes maximum

JEDEC Moisture Sensitivity

Table 10. Moisture sensitivity levels for LUXEON IR Compact for Automotive Line

LEVEL	FLOOR LIFE		SOAK REQUIREMENTS STANDARD	
	TIME	CONDITIONS	TIME	CONDITIONS
1	Unlimited	≤30 °C / 85% RH	168 Hours +5 / -0	8°C / 85% RH

Solder Pad Design

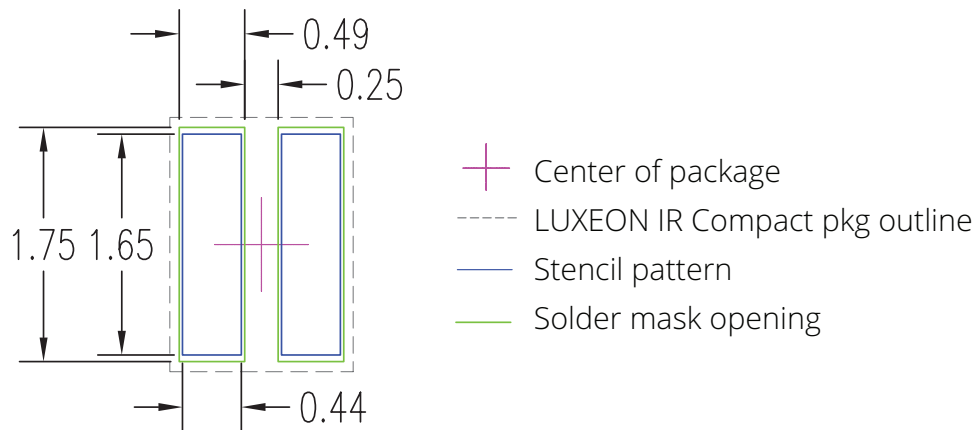


Figure 11. Recommended PCB solder pad layout for LUXEON IR Compact for Automotive Line

Notes for Figure 11:

1. Drawings are not to scale.
2. All dimensions are in millimeters.
3. Electrode pads are symmetric.

Packaging Information

Pocket Tape Dimensions

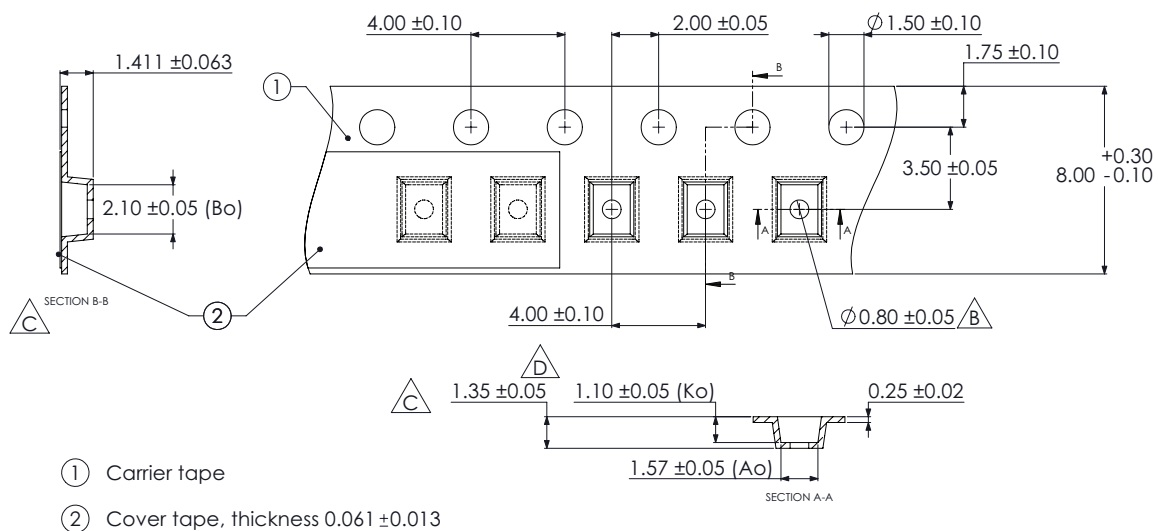


Figure 12. Pocket tape dimensions for L1IZ-AXXX0000000000

Notes for Figure 12:

- Notes for Figure 12:
1. Drawings are not to scale.
 2. All dimensions are in millimeters.

Reel Dimensions

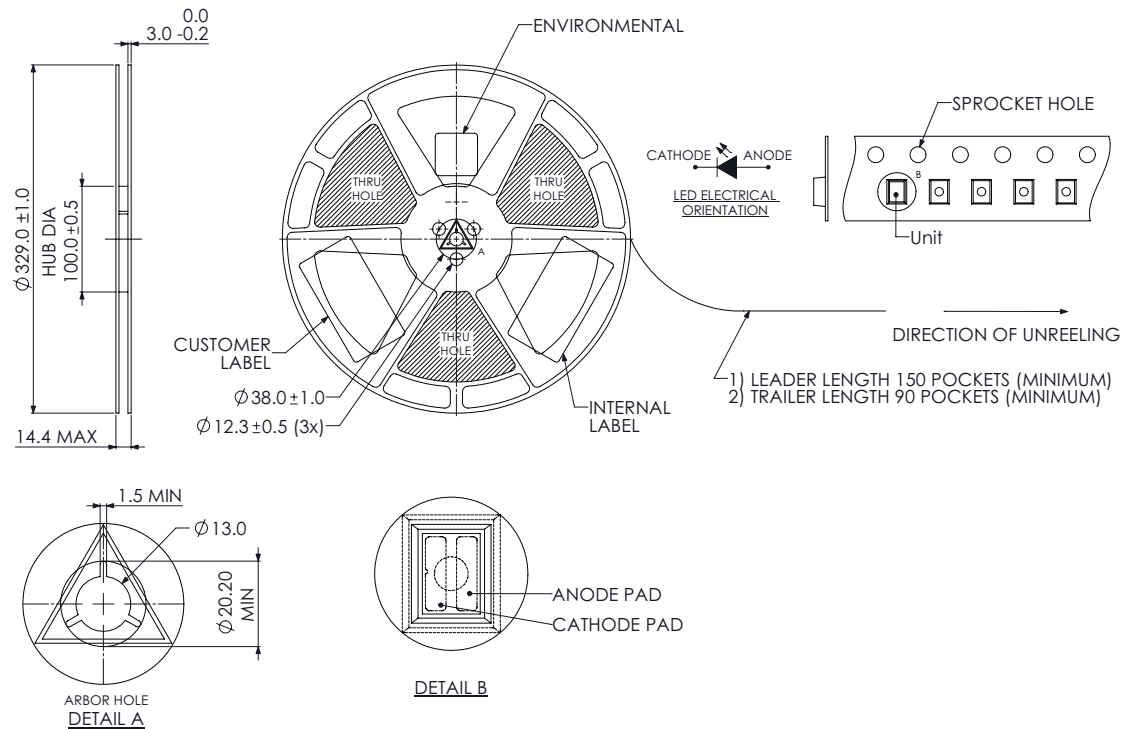


Figure 13. Reel dimensions for L1IZ-AXXX000000000

Notes for Figure 13:
1. Drawings are not to scale.
2. All dimensions are in millimeters.

About Lumileds

Companies developing automotive, mobile, IoT and illumination lighting applications need a partner who can collaborate with them to push the boundaries of light. With over 100 years of inventions and industry firsts, Lumileds is a global lighting solutions company that helps customers around the world deliver differentiated solutions to gain and maintain a competitive edge. As the inventor of Xenon technology, a pioneer in halogen lighting and the leader in high performance LEDs, Lumileds builds innovation, quality and reliability into its technology, products and every customer engagement. Together with its customers, Lumileds is making the world better, safer, more beautiful—with light.

To learn more about our lighting solutions, visit lumileds.com.



©2022 Lumileds Holding B.V. All rights reserved.
LUXEON is a registered trademark of the Lumileds Holding B.V. in the United States and other countries.
lumileds.com

Neither Lumileds Holding B.V. nor its affiliates shall be liable for any kind of loss of data or any other damages, direct, indirect or consequential, resulting from the use of the provided information and data. Although Lumileds Holding B.V. and/or its affiliates have attempted to provide the most accurate information and data, the materials and services information and data are provided “as is,” and neither Lumileds Holding B.V. nor its affiliates warrants or guarantees the contents and correctness of the provided information and data. Lumileds Holding B.V. and its affiliates reserve the right to make changes without notice. You as user agree to this disclaimer and user agreement with the download or use of the provided materials, information and data. A listing of Lumileds product/patent coverage may be accessed at lumileds.com/patents.

DS234 LUXEON IR Compact for Automotive
Product Datasheet 20220225

Downloaded from [Arrow.com](https://arrow.com)