


FEED-THROUGH MULTI-CONNECTION

35 or 32mm DIN Rail

Connect multiple wires to a single terminal block and eliminate reliability problems encountered when connecting two wires into a single clamp. Two versions are available.

Type CMC1-2 features a single screw-cage clamp for 22-10 AWG wires on one side and two clamps on the other side for 22-10 AWG wires.

Type CMC2-2 has two identical clamps for 22-10 AWG wires on both sides.

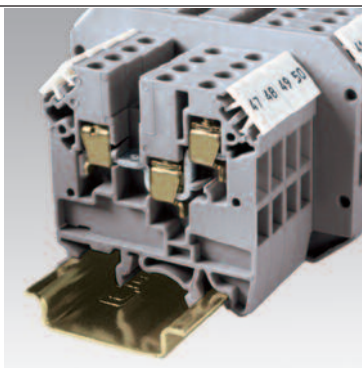

CMC1-2			CMC2-2		
Terminal Width			6 mm		
Height x Length			47 x 46.5 mm		
Stripping Length			9 mm		
Insulation Material			Polyamide 6.6		
Type of Connection			3 screw clamps & 1 tapped hole for cross connection		
Approvals					
Wire Range			22-10AWG 0.5-4 sq.mm 22-10 AWG		
Voltage Rating			600 V 600 V 600 V		
Current Rating			35 A 32 A 35 A		
Torque			7 lb-in. 0.5 Nm 7 lb-in.		
Terminal Block			Cat. No.	Std. Pk.	Cat. No.
End Plate			CMC1-2	100	CMC2-2
DIN Rail			EPCMC1-2	50	EPCMC2-2
for ordering information refer to page 62					
End Stop			CA702	50	CA702
for ordering information refer to page 63			CA802	50	CA802
Internal Jumper			CA722/2	100	CA722/2
			CA722/3	50	CA722/3
			CA722/4	50	CA722/4
			CA722/10	10	CA722/10
			CA722/100	5	CA722/100
Insulated Internal Jumper			CA742/2	100	CA742/2
			CA742/3	50	CA742/3
			CA742/4	50	CA742/4
			CA742/10	10	CA742/10
			CA742/100	5	CA742/100
Current Bars			CA703/1	100	CA703/1
			CA704/1	100	CA704/1
			CA705/1	100	CA705/1
			CA732/10	100	CA732/10
			CA732/10-A	100	CA732/10-A
			CA732/100	10	CA732/100
Shorting Sleeve & Screw			CA707/S/Q/01	100	CA707/S/Q/01
External Jumper			CA713/2	100	CA713/2
for use in upper level			CA713/3	100	CA713/3
			CA713/4	50	CA713/4
			CA713/10	25	CA713/10
Marking Tags (MT Type)			MT6	100	MT6



COLOR BLOCKS

(other than grey standard)

When ordering please add color suffix to Cat. No.

Example: CTS2.5U-N/R

Color	Ordering Suffix
Red	R
Blue	BU
Black	BL
Orange	O
Green	G
Yellow	Y
White	W
Beige	BG
Dark Brown	DB