


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND ITS SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE, SINCE THE INFORMATION WAS OBTAINED FROM THE MANUFACTURER. POSITRONIC ASSUMES NO RESPONSIBILITY FOR USER ERRORS OR SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

| DATE    | REV | REVISION RECORD | APP | DR | CK |
|---------|-----|-----------------|-----|----|----|
| 1-16-09 | NC  | ECO 30492       | RCW | YK | TK |
|         |     |                 |     |    |    |
|         |     |                 |     |    |    |
|         |     |                 |     |    |    |
|         |     |                 |     |    |    |

SK10211

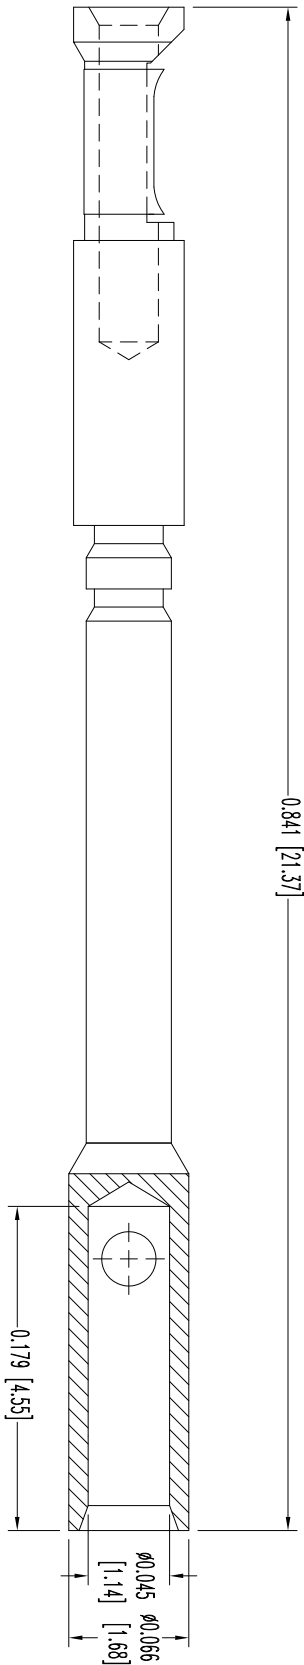

- NOTES:
1. MATERIALS AND FINISHES:  
CONTACT: BRASS, GOLD FLASH OVER NICKEL FINISH.  
RETAINER: BERYLLIUM COPPER, GOLD FLASH OVER NICKEL FINISH.
  2. ELECTRICAL CHARACTERISTICS:  
WORKING VOLTAGE: 300 V r.m.s.
  3. TEMPERATURE RANGE: -55°C TO +125°C.
  4. DIMENSIONS ARE IN INCHES [MILLIMETERS].



**POSITRONIC INDUSTRIES INC.**  
www.connectpositronic.com  
FSCM 28198



DECIMAL TOL.  
± 0.015 [0.38]

DD SERIES

SCALE  
N.T.S.

DRAWN BY  
YK

APPROVED BY  
R WILLIAMS

TITLE

FC8020D2

ANGULAR TOL.  
± 5°

DATE  
1-16-09

DRAWING NUMBER  
SK10211

REV.  
NC