

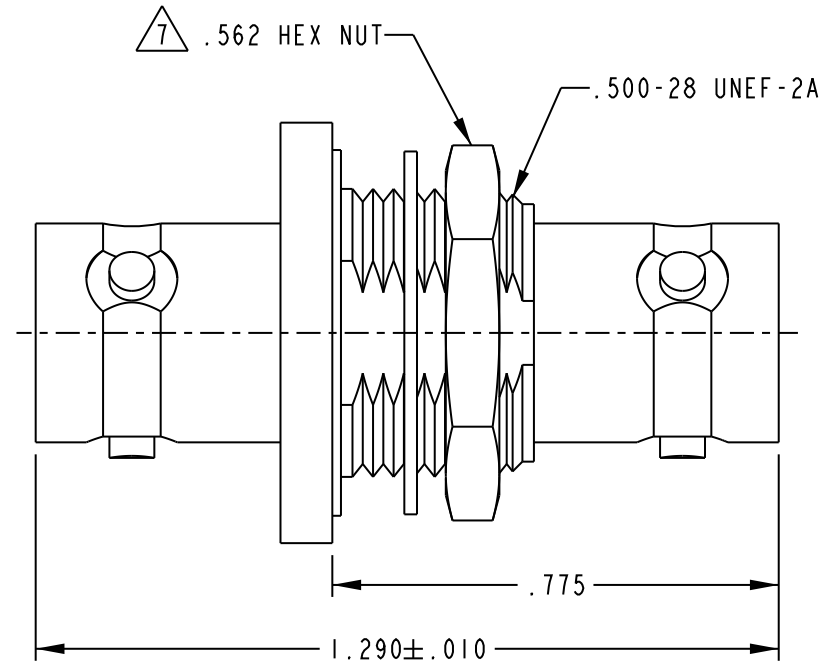


DATA CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO EMERSON CONNECTIVITY SOLUTIONS AND SHALL NOT BE DISCLOSED, COPIED OR USED FOR PROCUREMENT OR MANUFACTURE WITHOUT EXPRESS WRITTEN PERMISSION

REVISIONS			
REV	DESCRIPTIONS	DATE	APPROVED
H	ECO 53006	2/7/11	T. KOHLER

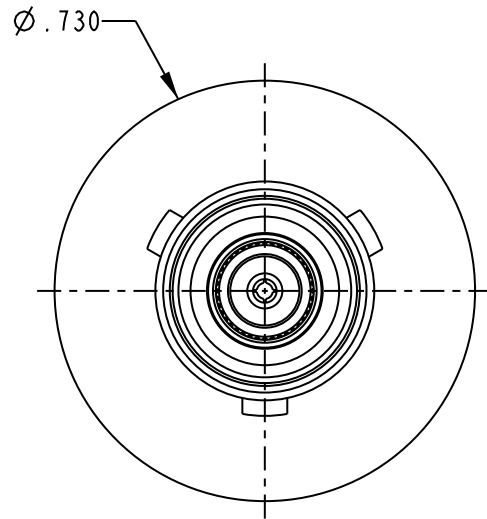

BJ78HS SHOWN

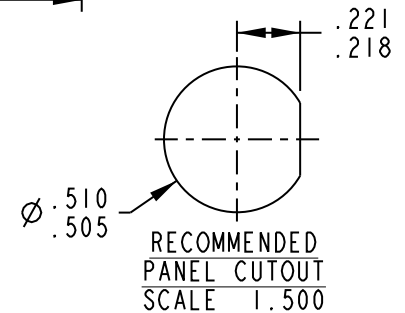

- △ 7. FOR BJ78HSS, 5/8 HEX NUT.
6. FOR BJ78HSS, REPLACE 8-1520-17 WITH 805-1304-3
5. MATERIAL & CONSTRUCTION: MEET THE REQUIREMENTS OF MIL-C-49142 WHERE APPLICABLE.
4. DIELECTRIC WITHSTANDING VOLTAGE: 500 V COMMON MADE VOLTAGE BETWEEN CIRCUITS.
3. LEAK RATE: 1×10^{-8} CC/SEC MAX OF TRACER GAS AT ATMOSPHERIC PRESURE.
2. HERMETICALLY SEALED TWINAX/TRIAX FEED THRU ADAPTER FOR MOUNTING IN BULKHEAD .187 THK MAX.

△ 1. PASSIVATED STAINLESS STEEL.

NOTES: UNLESS OTHERWISE SPECIFIED.

INTERPRET DRAWING PER MIL-STD-100. DIMENSIONS ARE IN INCHES AND INCLUDE FINISH THICKNESS UNLESS OTHERWISE SPECIFIED.		TOL: UNLESS SPECIFIED. .XX ± .005 .XXX ± .005 .XXXX ± .005 ANGLE ±		 cinch CONNECTIVITY SOLUTIONS a bel group	Cinch Connectivity Solutions 299 Johnson Ave. Ste. 100 Waseca, MN 56093 1-800-247-8256		
DRN C. WALLACE	4/7/11	MATERIAL: 			TITLE: BJ78HS, BJ78HSS		
CHK T. KOHLER	4/8/11	FINISH: 					
QUALITY				SIZE A	CAGE CODE 14949	DRAWING NO. 305-0063	REV. H
MANUF							
APPROVED							
PROT FILE NO. 305-0063		DO NOT SCALE DWG		SCALE 2/1	DATE 5/5/11	SHEET 1 OF 2	