
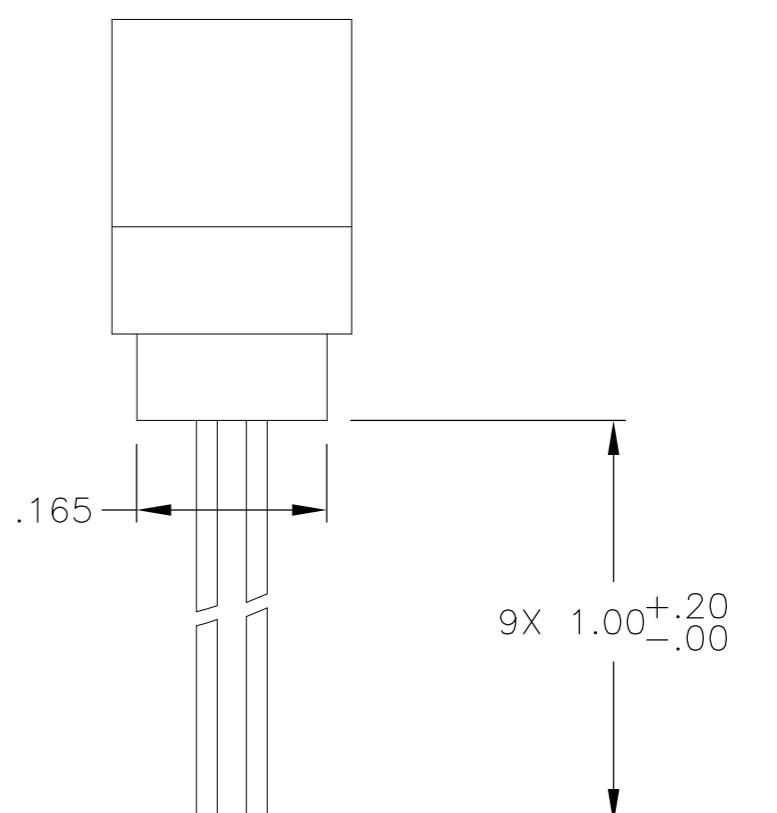
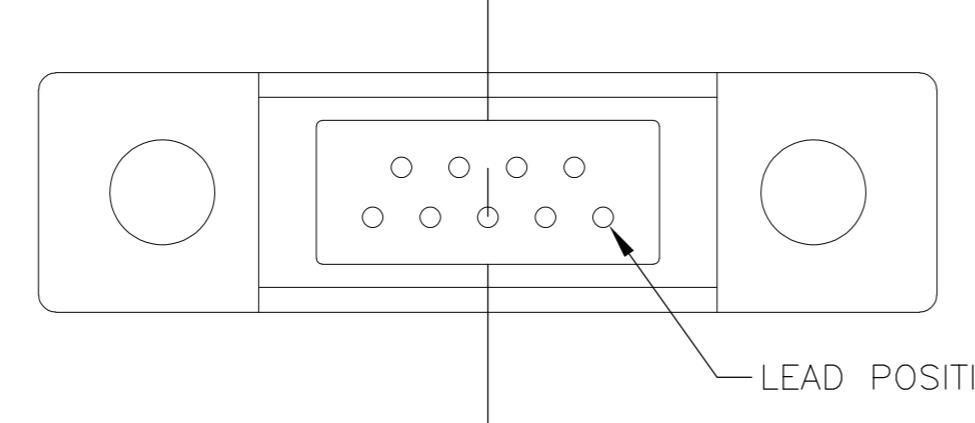
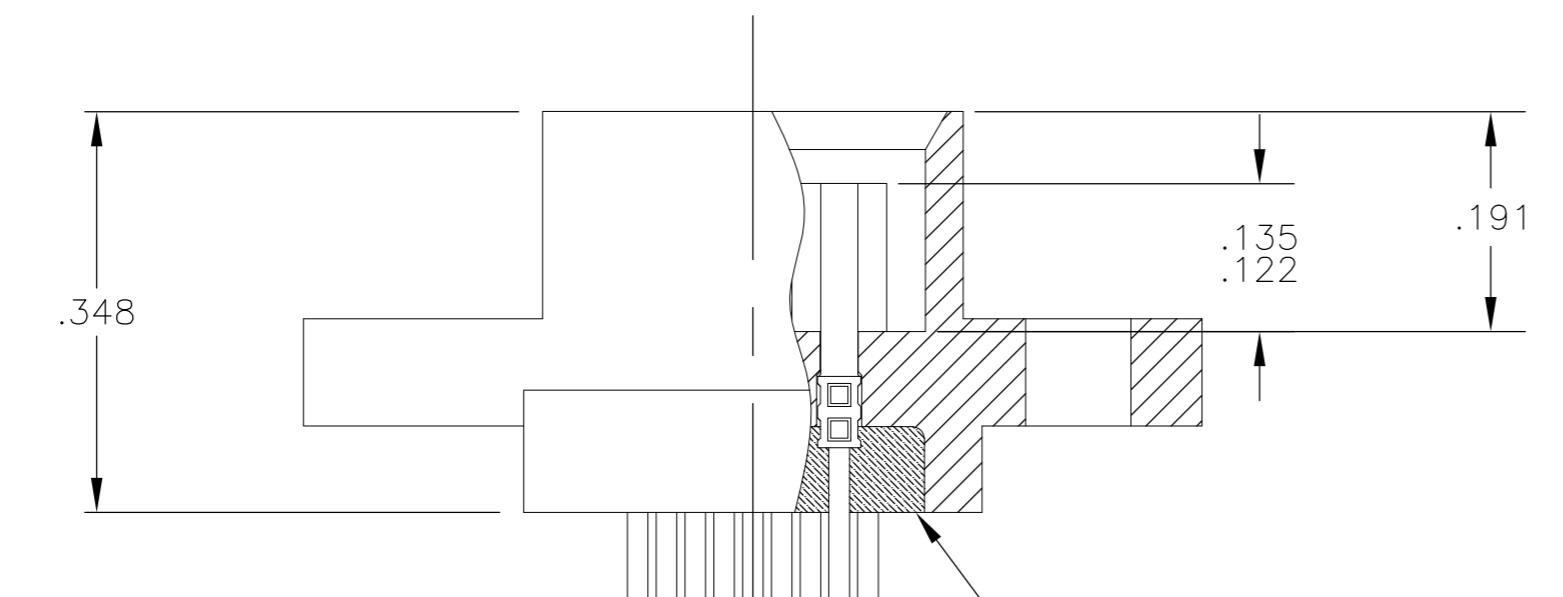


THIS DRAWING IS UNPUBLISHED.
 RELEASED FOR PUBLICATION
 - - -
 © COPYRIGHT - By -
 ALL RIGHTS RESERVED.

REVISIONS
 LOC — DIST —
 P LTR —
 A1 UPDATE PER ECO-11-007825
 DATE 04/13/11 DWN APVD

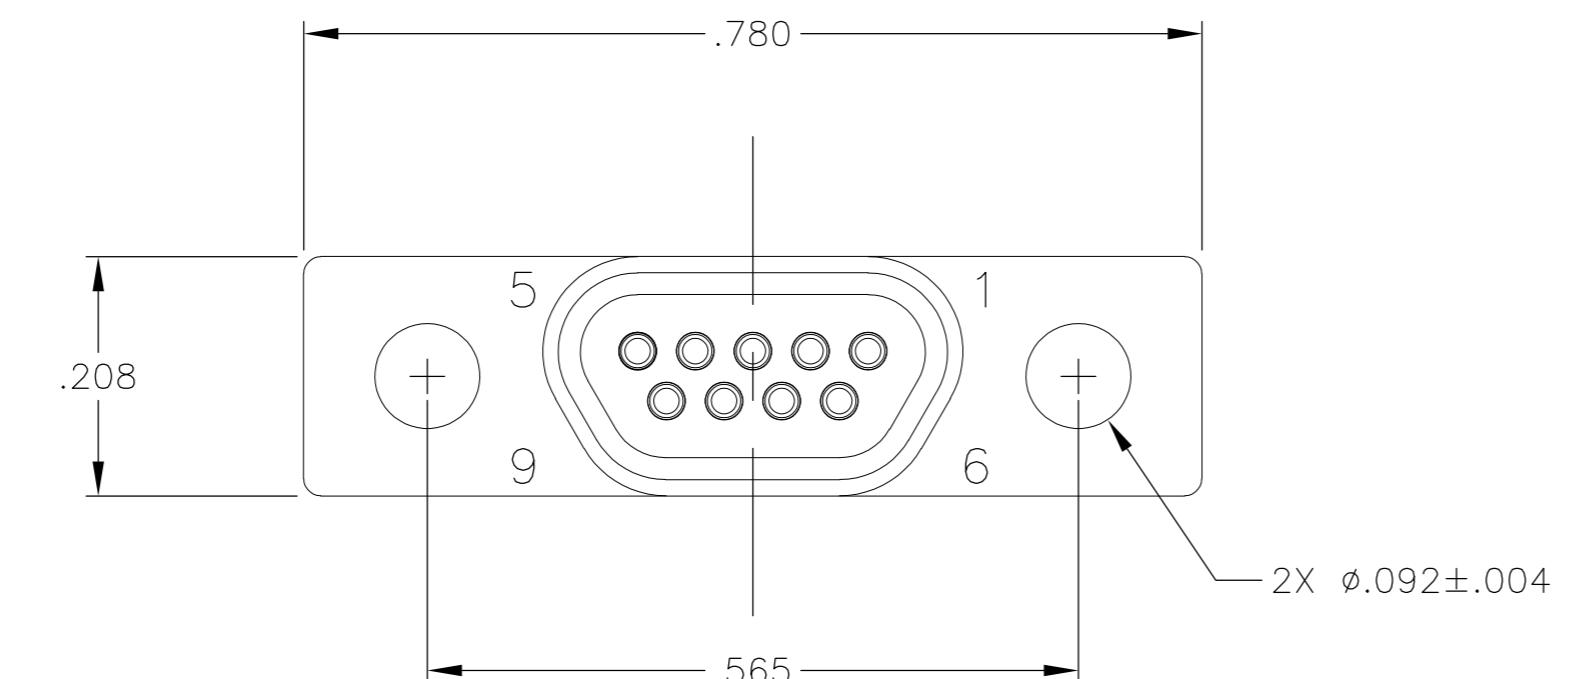

1 SHELL MAT'L: POLYPHENYLENE SULFIDE IN ACCORDANCE WITH ASTM D4037
 CONTACT MAT'L: COPPER ALLOY, GOLD PLATED

LEAD MAT'L: COPPER ALLOY, GOLD PLATED AND Sn63Pb37 SOLDER DIPPED

2 NO EPOXY ABOVE NOTED SURFACE

3 THIS ASSEMBLY WILL MEET THE DIMENSIONAL AND PERFORMANCE REQUIREMENTS OF MIL-DTL-83513, BUT IS NOT QPL DUE TO INSULATOR MATERIAL.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M STORRY CHK —	26 MAR 08	TE Connectivity
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD M STORRY PRODUCT SPEC	26 MAR 08	
	0 PLC ± — 1 PLC ± — 2 PLC ± .01 3 PLC ± .005 4 PLC ± — ANGLES ± 1°	— — — — — —	— — — — — —	MCDR RECEPTACLE ASSEMBLY, 9 POSITION, 25AWG SOLID LEADS, RYTON INSULATOR, MICRODOT P/N 095-0604-2649
MATERIAL	FINISH	WEIGHT	—	SIZE CAGE CODE DRAWING NO A2 98278 C-6-1532238-7
				RESTRICTED TO —
				CUSTOMER DRAWING
			SCALE 6:1	1 OF 1 REV A1