
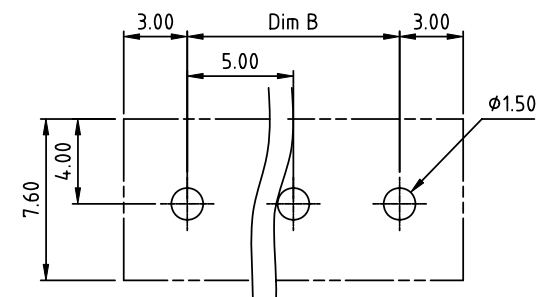
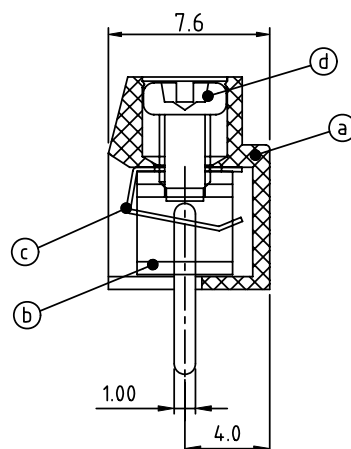
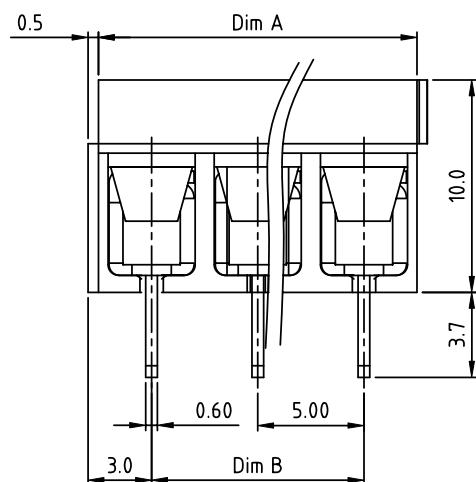


PRODUCT NUMBER	PITCH
T3xx04x400J0G	5.00 mm

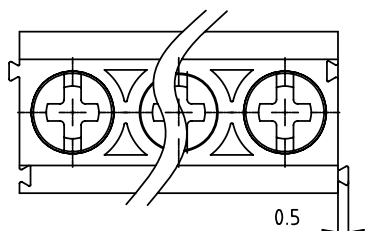

RECOMMENDED P.C.B LAYOUT
TOP VIEW

Material:

- Item (a) Terminal housing: Thermoplastic (UL 94V-0)
- Item (b) Terminal body: Brass stamping Tin plated,
- Item (c) Wire guard: Stainless steel
- Item (d) Terminal screw: Steel Zinc plating" +/ - "combination type

Electrical cULus/TUV

- Voltage rating: 300VAC/250VAC
- Current rating: 8A/12A
- Wire range:
- Solid wire(AWG): 14-26/0.2-2.5mm²
- Stranded wire(AWG): 14-26/0.2-2.5mm²
- Torque: 3.5Lb-In/0.4Nm
- Screw: M2.5
- Wire strip length: 5-6mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C/ -40°C to +105°C
- Soldering temperature: 260°C±5°C/5 Sec
- Safety Approval: cULus TUV

N = Number of poles
Dim A = N x 5.0
Dim B = (N-1) x 5.0

Poles	Tolerance
4-5p	±0.10
6-10p	±0.15
11-15p	±0.20
16-20p	±0.25
21-24p	±0.30

PART NO.: T3 xx 04 x 4 00J0 G

Solid block	Body Color	RoHS compliant
No. of poles	0 Black (RAL9005)	(lead<4%)
04 4 poles	2 Red (RAL3001/D)	In copper Alloy
05 5 poles	3 Orange(RAL2011/P)	
...	4 Yellow(RAL1018/A)	
...	5 Green(RAL6018/T)	
24 24 poles	6 Blue (RAL5015/A)	
	8 Grey(RAL7035/D)	
	9 White(RAL1102)	
	C Green(RAL6018/U)	

mat'l. code				surface ASME Y14.5	tolerance ASME Y14.5	projection	product family
ltr	ecn	no	dr	date	tolerances unless otherwise specified		TERMINAL BLOCK
					angles		title
					0.015	MM	TERMINAL BLOCK
					X±0.5		WIRE PROTECTOR, 180D WIRE INLET
					X.X±0.3		dwg no
					X.X±0.1		sheet 1 of 1 size
							T3xx04x400J0G A4
							type
							CUSTOMER Drawing
sheet	revision	A					
index	sheet	1					