



To kara more about CN Semiconductor, please visit our website at www.onsemi.com

Please note. As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (_), the underscore (_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at www.onsemi.com. Please email any questions regarding the system integration to Fairchild guestions@onsemi.com.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products for any particular purpose, nor does ON Semiconductor assume any liability to make changes without further notice to any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expense

February 2011


FJH1101 Ultra Low Leakage Diode

General Description

An Ultra Low Leakage Diode in the DO-35 package.

The forward voltage is typically greater than 0.5 volts at 1.0 micro-ampere.

This product is light sensitive, any damage to the body coating will affect the reverse leakage new yposed to light.



	, cal F	erward Vo	oltages
1.	.0 uA	<u> </u>	530 mV
al 1	9 uA		605 mV
TREE (0 uA		
	.0 mA		780 m /
	0 mA		89.7 mV
101	50 m^		995 mV
	06 mA	12.7.	1.07 V

^{*} XY = 6 weeks marking date code, X = last digit of the dar ye 'Alpha), \ 3 weeks numeric code

Symbol	Parameter	Value	Units
W _{IV}	'M' 'g IIse Vollage	15	V
I _E	DC F ward Cuirer t (I _F)	150	mA
PL	Total Power Dissipation at T _A = 25°C Linear Derating Factor from T _A = 25°C	250 1.67	mW mW/°C
36	Thermal Recistance Junction-เบ-Ambient	300	°C/W
1 J	Operating Vinction Temperature	175	°C
Total	Storage Temperature	-55 to +200	°C

^{*} These ratings are limiting values above which the serviceability of any semiconductor device may be impaired.

Electrical Characteristics $T_A = 25$ °C unless otherwise noted


Symbol	Parameter	Test Condition	Min.	Тур.	Max.	Units
B _V	Breakdown Voltage	$I_R = 5.0 \mu A$	20			V
I _R	Reverse Leakage	V _R = 5.0V V _R = 15V			5.0 15	pA pA
V _F	Forward Voltage	I _F = 50mA			1.1	V
C _T	Diode Capacitance	$V_R = 0V$, $f = 1.0MHz$			2.0	pF

© 2011 Fairchild Semiconductor Corporation FJH1101 Rev. 2

www.fairchildsemi.com

Physical Dimension

DO-35

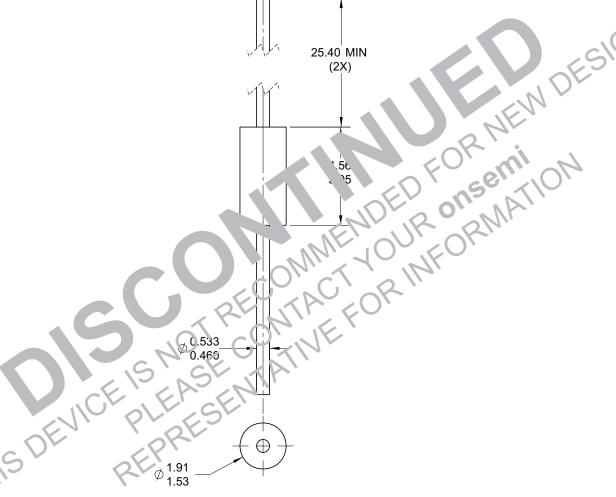

NOTES: UNLESS OTHERWISE SPECIFIED

- A) PACKAGE STANDARD REFERENCE:
 JEDEC DO-204, VARIATION AH.
 B) HERMETICALLY SEALED GLASS PACKAGE.

- C) PACKAGE WEIGHT IS 0.137 GRAM.
 D) ALL DIMENSIONS ARE IN MILLIMETERS.
 E) DRAWING FILE NAME: DO35AREV02

Dimensions in Millimeters



U.

TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

AccuPowerTM F-PFSTM
Auto-SPMTM FRFET[®]

AX-CAP™* Global Power ResourceSM
Build it Now™ Green FPS™

CorePLUS™ Green FPS™ e-Series™
CorePOWER™ Gmax™

CorePOWER™ Gmax™

CROSSVOLT™ GTO™

CTL™ IntelliMAX™

Current Transfer Logic™ ISOPLANAR™

Current Transfer Logic™
DEUXPEED®
Dual Cool™
EcoSPARK®
EfficientMax™
ESBC™

SOPLANAR™
MegaBuck™
MicROCOUPLER™
MicroFET™
MicroPak™
MicroPak™
MicroPak™

Fairchild®
Fairchild Semiconductor®
FACT Quiet Series™
FACT®
FAST®

MillerDrive™
Motion-Max™
Motion-SPM™
mWSaver™
OptoHiT™
OPTOLOGIC®
OPTOPLANAR®

FastvCore™ ®
FETBench™
FlashWriter®*

FlashWriter[™] PDP SPM[™]

Power-SPM™ PowerTrench® PowerXS™

Programmable Active Droop™

QFĒT[®]
QS™
Quiet Series™
RapidConfigure™

Saving our world, 1mW/W/kW at a time™ SignalWise™

SmartMax™
SMART START™
SPM®
STEALTH™
SuperFET®
SuperSOT™-3
SuperSOT™-6

SuperSOTTM-8
SupreMOS[®]
SyncFETTM
Sync-LockTM

SYST (®

The Power Franchise®

The Right Technology for Your Success™

franchise
TinyBoost™
TinyBuck™
TinyCalc™
TinyLogic®
TiNYOPTO™
TinyPower™
TinyPower™
TinyPWM*

TinyM' e™

T- _ult Dete

≺UEC' REI

HC ltra FRFE \

UniFC (T)
VCXTM
V.Suz.(MaxTM
XSTM

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE TO, KE C. 3ES WIT, ICUT FURTHER, NOTICE TO ANY FRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRC LD DOL NO. SSUME ANY LABILITY ARISIN G O JI OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DESIT C. VEY JAY LICENSE UNDER ITS PATEIN FRIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPANY THE SOF AN HILD'S WORLD WIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCES.

LIFE SUPPORT POLICY

FAIRCHILD'S PROD' , IS ARE NO LITT. RIZED FOR USE AS CPITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

- 1. If apply evice ystems are devices or systems which, (a), the interest of surgical implant into the body or (b) support or ustain it and all whose failure to perform when properly used in cordan with instructions for use provided in the labeling, can be record to result in a significant injury of the user.
- A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

ANTI-COUNTERFEITING POLICY

Fairchild Sen recorductor Corporation's Anti-Courte, letting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, www.fair.thildsemi.com, under Sales Support.

Conierfering of semiconductor parts is a prowing problem in the industry. All manufacturers of semiconductor products are experiencing counterfeiting of their parts. Customers who inadverterially purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed applications, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address any warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

PRODUCT STATUS DEFINITIONS

Definition of Terms

Definition of Terms				
Datasheet Identification	Product Status	Definition		
Advance Information	Formative / In Design	Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.		
Preliminary	First Production	Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.		
No Identification Needed	Full Production	Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.		
Obsolete	Not In Production	Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.		

Rev. 153

^{*} Trademarks of System General Corporation, used under licen. by Fairc. Semiconductor



ON Semiconductor and the are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor and severally, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify an

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada

Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910 Japan Customer Focus Center Phone: 81-3-5817-1050 ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative