


5-212502-1 Product Details

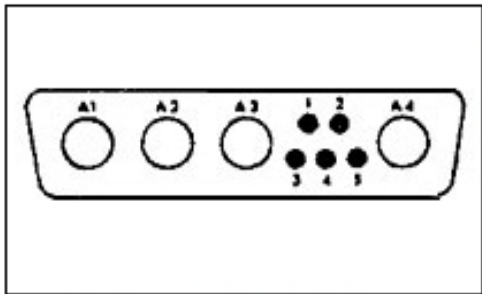

5-212502-1

TE Part Number: 5-212502-1

Active

Add to Part List

View 3D PDF

Subminiature D Pin/Socket Connectors for MIL-C-24308 and MIL-C-39029

Always EU RoHS/ELV Compliant (Statement of Compliance)

Product Highlights:

- Connector
- Product Series = 109
- Density = Standard
- Terminate To Coaxial Cable, Terminate To Printed Circuit Board, Terminate To Wire
- Insert Arrangement = 9C4

View all Features | Find Similar Products

Live Product Chat US Only 8:30am - 5pm ET, Mon - Fri

Quick Links

- Check Pricing & Availability
- Search for Tooling
- Product Feature Selector
- Contact Us About This Product

Documentation & Additional Information

Product Drawings: - RECEPTACLE ASSEMBLY AMPLIMITE 9C4 SIZE 3, SERIES 109... (PDF, English) Catalog Pages/Data Sheets: - None Available Product Specifications: - None Available Application Specifications: - None Available Instruction Sheets: - None Available CAD Files: (CAD Format & Compression Information) 2D Drawing (DXF, Version L) 3D Model (IGES, Version L) 3D Model (STEP, Version L) List all Documents	Additional Information: - Product Line Information Additional Product Images: - PCB Layout Related Products: - Tooling
---	--

Product Features (Please use the Product Drawing for all design activity)

Product Type Features: - Product Type = Connector - Product Series = 109 - Gender = Receptacle - Shell Size = 3 - Shell Material = Steel - Mounting Hole Diameter (mm [in]) = 3.05 [.120] - Comment = Cable clamp/strain relief hardware cannot be used with these arrangements. Body Related Features: - Insert Arrangement = 9C4 - Blindmate = No - Non-Magnetic = No - Sockets = Without - Rear Grommet = No - Power/Signal/Coax Combination = Yes - Shell Plating = Zinc - Mount Style = Mounting Holes - Retention Clip Material = Stainless Steel	Contact Related Features: - Contact Size = 20 Configuration Related Features: - Density = Standard Industry Standards: - Government/Industry Qualification = No - RoHS/ELV Compliance = RoHS compliant, ELV compliant - Lead Free Solder Processes = Wave solder capable to 240°C, Wave solder capable to 260° C, Wave solder capable to 265°C - RoHS/ELV Compliance History = Always was RoHS compliant - NASA Qualification = No Conditions for Usage: - Terminate To = Coaxial Cable, Printed Circuit Board, Wire Other: - Brand = AMP
---	---