


3M™ CONNECTOR FOR PC104 EMBEDDED SYSTEM APPLICATIONS,
COMPLIANT AND BUS COMPATIBLE

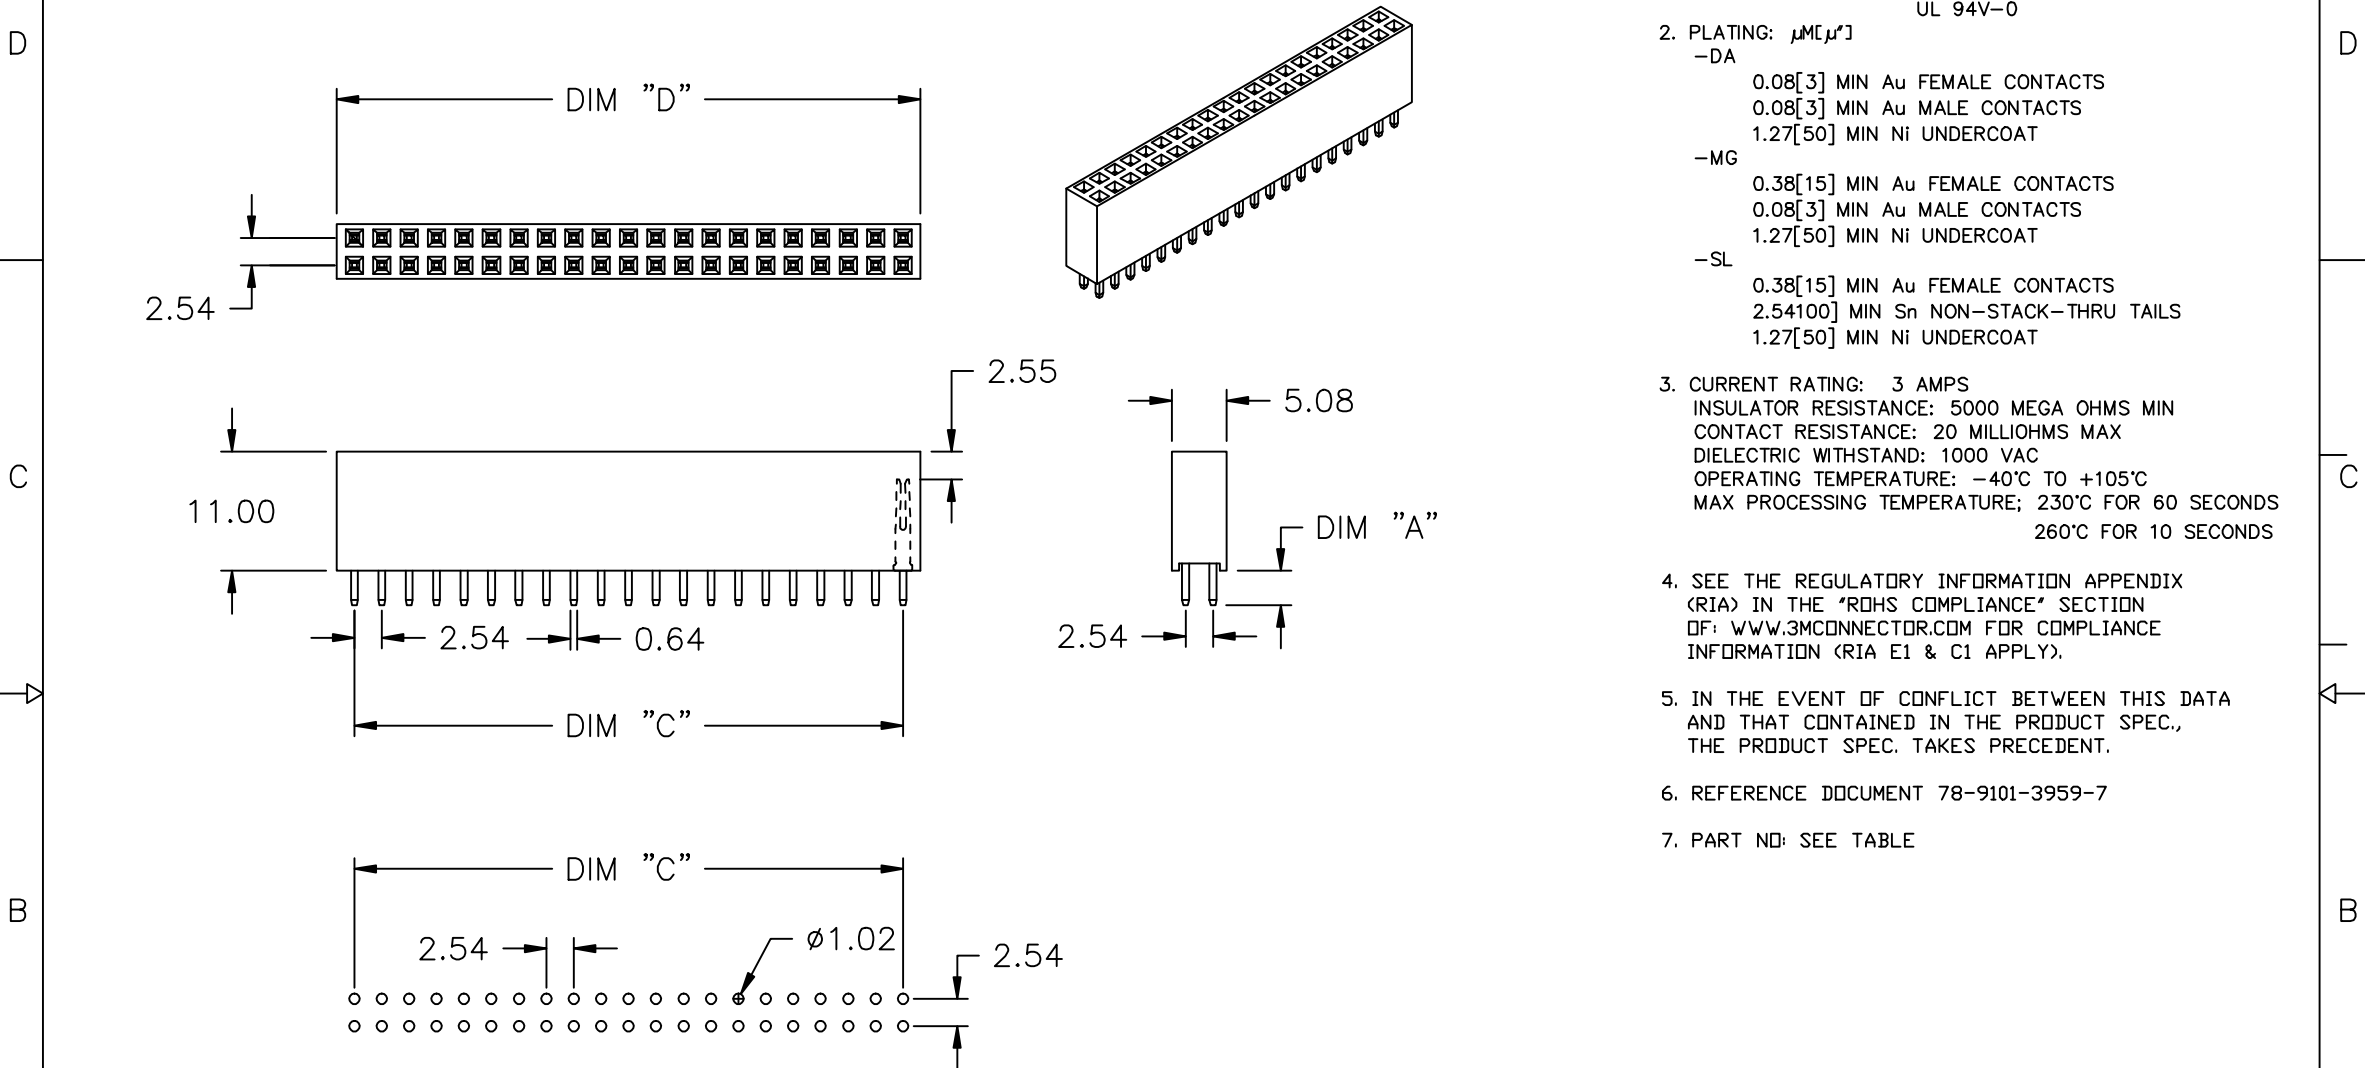

RECOMMENDED P.C.B LAYOUT
TOLERANCES: ±0.05mm

TYPE	PART NO.	DIM "A"	DIM "C"	DIM "D"	MIN STANDOFF	MAX STANDOFF
40-PIN COMPLIANT NON-STACK-THRU SOLDER	4P01-2A02-XX	3.20	48.26	51.50	15.0	
40-PIN BUS COMPATIBLE STACK-THRU SOLDER	4P01-2B02-XX	6.00	48.26	51.50	11.3	13.0
40-PIN COMPLIANT STACK-THRU SOLDER	4P01-2C02-XX	7.90	48.26	51.50	11.3	14.9
40-PIN COMPLIANT STACK-THRU SOLDER	4P01-2D02-XX	12.00	48.26	51.50	15.0	19.0
64-PIN COMPLIANT NON-STACK-THRU SOLDER	4P02-2A02-XX	3.20	78.74	81.98	15.0	
64-PIN BUS COMPATIBLE STACK-THRU SOLDER	4P02-2B02-XX	6.00	78.74	81.98	11.3	13.0
64-PIN COMPLIANT STACK-THRU SOLDER	4P02-2C02-XX	7.90	78.74	81.98	11.3	14.9
64-PIN COMPLIANT STACK-THRU SOLDER	4P02-2D02-XX	12.00	78.74	81.98	15.0	19.0

-XX IS PLATING TYPE

- NOTES:
- MATERIAL:
CONTACT MATERIAL: PHOSPHOR BRONZE
INSULATOR MATERIAL: POLYESTER NYLON-6T
UL 94V-0
 - PLATING: $\mu\text{M}[\mu\text{in}]$
-DA
0.08[3] MIN Au FEMALE CONTACTS
0.08[3] MIN Au MALE CONTACTS
1.27[50] MIN Ni UNDERCOAT
-MG
0.38[15] MIN Au FEMALE CONTACTS
0.08[3] MIN Au MALE CONTACTS
1.27[50] MIN Ni UNDERCOAT
-SL
0.38[15] MIN Au FEMALE CONTACTS
2.54[100] MIN Sn NON-STACK-THRU TAILS
1.27[50] MIN Ni UNDERCOAT
 - CURRENT RATING: 3 AMPS
INSULATOR RESISTANCE: 5000 MEGA OHMS MIN
CONTACT RESISTANCE: 20 MILLIOHMS MAX
DIELECTRIC WITHSTAND: 1000 VAC
OPERATING TEMPERATURE: -40°C TO +105°C
MAX PROCESSING TEMPERATURE: 230°C FOR 60 SECONDS
260°C FOR 10 SECONDS
 - SEE THE REGULATORY INFORMATION APPENDIX (RIA) IN THE "ROHS COMPLIANCE" SECTION OF: WWW.3MCONNECTOR.COM FOR COMPLIANCE INFORMATION (RIA E1 & C1 APPLY).
 - IN THE EVENT OF CONFLICT BETWEEN THIS DATA AND THAT CONTAINED IN THE PRODUCT SPEC., THE PRODUCT SPEC. TAKES PRECEDENT.
 - REFERENCE DOCUMENT 78-9101-3959-7
 - PART NO: SEE TABLE

DESIGN REFERENCE	NEXT ASSEMBLY	REV	ECO	ISSUE DATE AND DESCRIPTION	DRFT	CHKD
DISTRIBUTION CODES		DRFT	MWL	DATE 02/02/11	MFG	DATE
		CHKD	TS	DATE 02/02/11	APPL	DATE
DIVISION	DIVISION CODE	3M 3M Center St. Paul, MN 55144				
DO NOT SCALE DRAWING	SCALE	TOLERANCES EXCEPT AS NOTED				
		INCHES 0.000 ± 0.000 ± 0.000 ± 0.000 ±				
THIRD ANGLE PROJECTION		MILLIMETERS 0 ± 0.00 ±.3 0.00 ±.20 0.00 ±				
INTERPRET PER ASME Y14.5 - 1994		TITLE 4P0X-2X02-XX, PC104, COMPLIANT, CONNECTORS				
MAX SURFACE ROUGHNESS □ ALL SURFACES ✓ □ MARKED ONLY		CAGE NUMBER	SIZE C	DRAWING NO. 78-5100-2392-8	REV. A	
	ANGLES ±	MODEL	DET. LISTS	YES	NO	SHT 1 OF 2

3M™ CONNECTOR FOR PC104 EMBEDDED SYSTEM APPLICATIONS,
COMPLIANT AND BUS COMPATIBLE

PC104 CONNECTOR ORDERING GUIDE

4P 0 X - 2 X 0 2 - XX

PRODUCT FAMILY: PC104

No. CONTACTS:
1=40
2=64

PLATING OPTIONS: μ M[μ "]

BODY HEIGHT:	TAIL LENGTH:	STANDOFF HEIGHT:
A=11.0	3.2	[MIN-MAX]mm
B=11.0	6.0	[15.0-]
C=11.0	7.9	[11.3-13.0]
D=11.0	12.0	[11.3-14.9]
		[15.0-19.0]


DA = 0.08[3] MIN Au ALL OVER
1.27[50] MIN Ni ALL OVER

MG = 0.38[15] MIN Au FEMALE CONTACTS
0.08[3] MIN Au TAIL AREA
1.27[50] MIN Ni ALL UNDER

SL = 0.38[15] MIN Au FEMALE CONTACTS
2.54[100] MIN MATTE Sn TAILS
1.27[50] MIN Ni ALL UNDER
(NON-STACK-THRU ONLY)

TAIL TYPE:
2=SOLDER

NOTE: STANDOFF HEIGHT, 15mm = COMPLIANT,
OTHERS = BUS COMPATIBLE
TAIL LENGHT, > 4.3mm = STACK-THRU
< 4.2mm = NON-STACK-THEU

DESIGN REFERENCE		NEXT ASSEMBLY		REV	ECO	ISSUE DATE AND DESCRIPTION		DRFT	CHKD
DISTRIBUTION CODES		ECO		DRFT	MWL	DATE	02/02/11	MFG	DATE
				CHKD	TS	DATE	02/02/11	APPL	DATE
DIVISION		DIVISION CODE		 3M Center St. Paul, MN 55144					
DO NOT SCALE DRAWING		SCALE		TOLERANCES EXCEPT AS NOTED					
				INCHES .0 ± .00 ± .000 ± .0000 ±					
THIRD ANGLE PROJECTION				MILLIMETERS 0 ± .0 ±.3 .00 ±.20 .000 ±					
INTERPRET PER ASME Y14.5 - 1994				TITLE 4P0X-2X02-XX, PC104, COMPLIANT, CONNECTORS					
MAX SURFACE ROUGHNESS ☐ ALL SURFACES ☒ MARKED ONLY		ANGLES ±		CAGE NUMBER	SIZE	DRAWING NO.		REV.	
					C	78-5100-2392-8		A	
				MODEL		DET. LISTS		YES	NO
								SHT 2 OF 2	