

OPIA814, OPIA815, OPIA817 OPIA1210, OPIA4010 DIP Package




Features:

- 5,000 Vrms electrical isolation
- Choice of a Single and Dual LED
- Phototransistor or Photodarlington Sensor
- Low-cost plastic Dual-In-Line (DIP) package

Approval Agency:

- UL Certification No: E58730
- VDE No: 40026625 40026536, 40026654

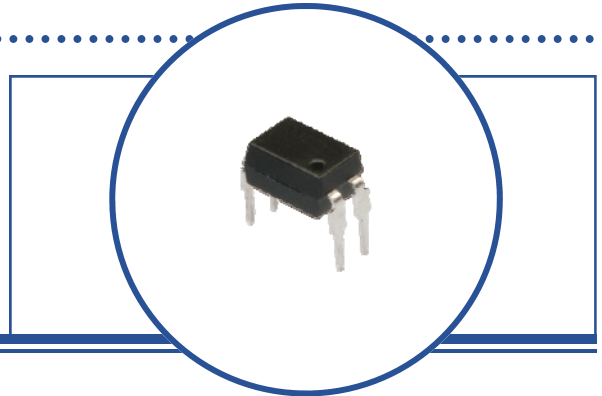

Description:

The OPIA series optocouplers are designed for applications that use an analog output (Phototransistor or Photodarlington) in a dual-in-line package. A wide selection of configurations are available. With typical isolation voltage of 5,000 Volts(RMS), these products meet typical power system isolation requirements.

Theory of operation: The LED transmitter is used to illuminate the Photosensor providing electrical isolation between two power systems while maintaining the ability to transmit information from one power system to the other. In many applications, analog signal levels may be required to be transmitted between two power systems while maintaining isolation between the power systems up to 5,000 volts(RMS). A variety of LED and photosensor configurations are available depending on the system requirements.

The ratio Current Transfer Ratio (CTR) is determined by using the output current and input current for analog photosensors. CTR ratios can range from as low as 5 to over 9,000 depending on the device.

$$CTR = \frac{\text{Photosensor Current}}{\text{LED Current}} = \frac{20 \text{ mA}}{10 \text{ mA}} * 100 = 200$$

All DIP product is shipped in a shipping tube with "TU" identified on the end of the part number.
Example: OPIA817DTUE is a 4-Pin DIP shipped in a tube (TU).

Applications:

- High voltage isolation: 5,000 Volts RMS
- PCBoard power system isolation
- Industrial equipment power isolation
- Medical equipment power isolation
- Office equipment






RoHS

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

OPIA814, OPIA815, OPIA817 OPIA1210, OPIA4010 DIP Package



Package Outline Dimensions and Schematics: Top-View

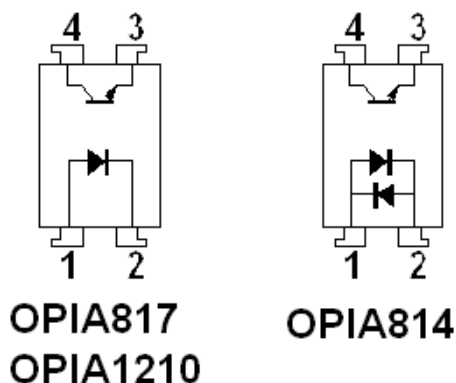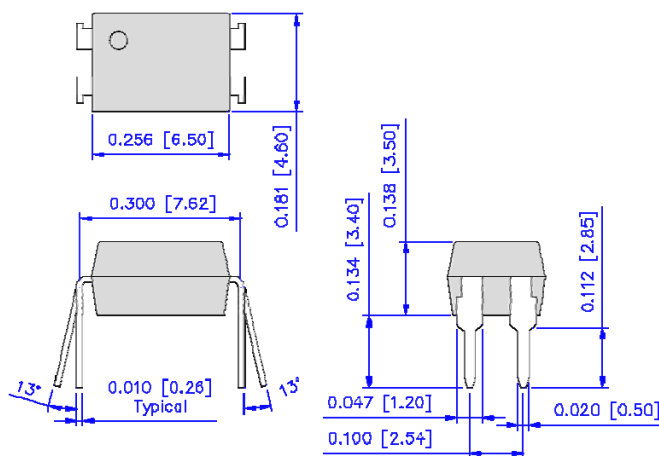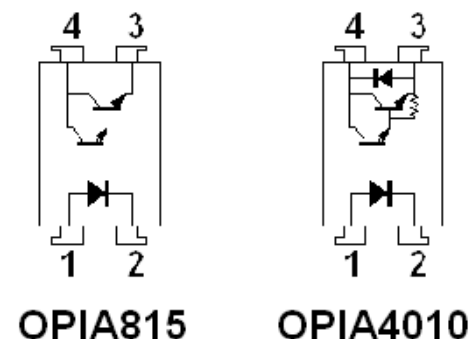

Part Number	Pin #			
	1	2	3	4
OPIA817	A	K	E	C
OPIA814	A-K	K-A	E	C
OPIA815	A	K	E	C
OPIA4010	A	K	E	C
OPIA1210	A	K	E	C

Analog Output Devices Ordering Information

Part Number	Isolation Voltage Max. (Vrms)	CTR Min/Typ/Max	Typ. Tr / Tf (μs) R _L = 100 ohms	Package	Configuration
OPIA817D	5,000	50 / - / 600	4 / 3	4-Pin DIP	A K—C E
OPIA814D	5,000	60 / - / 600	5 / 4	4-Pin DIP	A K, K A—C E
OPIA815D	5,000	70 / - / -	80 / 72	4-Pin DIP	A K—C E (Dar)
OPIA4010D	5,000	600 / - / 9,000	60 / 50	4-Pin DIP	A K—C E (Dar)
OPIA1210D	5,000	50 / - / 600	2 / 3	4-Pin DIP	A K—C E

Configuration: Definition of Terms
LED Identification—Sensor Identification

Configuration Information	LED	A = Anode	K = Cathode		
	Sensor	B = Base	C = Collector	E = Emitter	(Dar) = Photodarlington

Packaging	Part Number Suffix: TU = Shipped in Tubes	Example: OPIA817DT UE
-----------	--	--

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

OPIA814, OPIA815, OPIA817 OPIA1210, OPIA4010 DIP Package



Absolute Maximum Ratings ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Storage Temperature	-55° C to +125° C
Operating Temperature	-30° C to +100° C
Isolation voltage (1 minute)	5,000 Vrms
Total Package Power Dissipation	200 mW
Lead Soldering Temperature (1/16" (1.6 mm) from case for 5 seconds with soldering iron)	260° C

Input Diode

Continuous Forward Current	50 mA
Peak Forward current (1 μs pulse width, 300 pps)	1 A
Reverse Voltage OPIA817, OPIA815, OPIA4010, OPIA1210 OPIA814, OPIA4010	6 V -
Power Dissipation	70 mW

Output Phototransistor

Collector-Emitter Voltage OPIA817, OPIA814 OPIA4010 OPIA815 OPIA1210	60 V 300 V 35 V 350 V
Emitter-Collector Voltage OPIA817, OPIA814, OPIA815 OPIA4010 OPIA1210	6 V 0.1 V 7 V
Collector Current OPIA817, OPIA814, OPIA1210 OPIA4010 OPIA815	50 mA 150 mA 80 mA
Power Dissipation All except the part numbers noted below OPIA4010	150 mW 200 mW

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

OPIA814, OPIA815, OPIA817 OPIA1210, OPIA4010 DIP Package



Electrical Characteristics

SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
--------	-----------	-----	-----	-----	-------	-----------------

Input Diode

V_F	Forward Voltage All except those noted below OPIA1210	- 1.0	1.2 1.2	1.4 1.3	V	$I_F = 20 \text{ mA}$ $I_F = 10 \text{ mA}$
V_{FM}	Peek Forward Voltage OPIA814, OPIA4010 OPIA1210	- -	- -	3.5 3.0	V	$I_{FM} = 500 \text{ mA}$
I_R	Reverse Current All except those noted below OPIA814 OPIA1210	- - -	- - -	10 - 10	μA	$V_R = 4 \text{ V}$ - $V_R = 5 \text{ V}$
C_t	Terminal Capacitance All except those noted below OPIA815	- -	30 30	- 250	pf	$V = 0.0 \text{ V}$, $f = 1 \text{ K Hz}$ $V = 0.0 \text{ V}$, $f = 1 \text{ K Hz}$

Output Phototransistor

I_{CEO}	Collector Dark Current OPIA817, OPIA814 OPIA1210	- -	- 10	100 200	nA	$I_F = 0 \text{ mA}$, $V_{CE} = 20 \text{ V}$ $I_F = 0 \text{ mA}$, $V_{CE} = 300 \text{ V}$
$V_{CE(SAT)}$	Collector-Emitter Saturation Voltage OPIA817 OPIA814 OPIA1210	- - -	0.1 0.1 -	0.2 0.3 0.4	V	$I_F = 20 \text{ mA}$, $I_C = 1 \text{ mA}$ $I_F = 20 \text{ mA}$, $I_C = 1 \text{ mA}$ $I_F = 8 \text{ mA}$, $I_C = 2.4 \text{ mA}$
f_C	Cutt-Off Frequency All except those noted below OPIA817, OPIA814, OPIA1210	- -	- 80	- -	K Hz	$V_{CC} = 5 \text{ V}$, $I_C = 2 \text{ mA}$, $R_L = 100 \Omega$
t_R	Rise Time OPIA817 OPIA814 OPIA1210	- - -	4 5 2	18 20 -	μs	$V_{CC} = 2 \text{ V}$, $I_C = 2 \text{ mA}$, $R_L = 100 \Omega$ $V_{CC} = 2 \text{ V}$, $I_C = 2 \text{ mA}$, $R_L = 100 \Omega$ $V_{CC} = 10 \text{ V}$, $I_C = 2 \text{ mA}$, $R_L = 100 \Omega$
t_F	Fall Time OPIA817D OPIA814 OPIA1210	- - -	3 4 3	18 20 -	μs	$V_{CC} = 2 \text{ V}$, $I_C = 2 \text{ mA}$, $R_L = 100 \Omega$ $V_{CC} = 2 \text{ V}$, $I_C = 2 \text{ mA}$, $R_L = 100 \Omega$ $V_{CC} = 10 \text{ V}$, $I_C = 2 \text{ mA}$, $R_L = 100 \Omega$

Continued on Next Page

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

OPIA814, OPIA815, OPIA817

OPIA1210, OPIA4010

DIP Package



Electrical Characteristics - Continued from Previous Page

SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
--------	-----------	-----	-----	-----	-------	-----------------

Output PhotoDarlington

I_{CEO}	Collector Dark Current OPIA4010 OPIA815	- -	- -	1.0 1.0	μA	$I_F = 0 \text{ mA}$, $V_{CE} = 200 \text{ V}$ $I_F = 0 \text{ mA}$, $V_{CE} = 10 \text{ V}$
$V_{CE(SAT)}$	Collector-Emitter Saturation Voltage OPIA815 OPIA4010	- -	0.8 -	1.0 1.5	V	$I_F = 20 \text{ mA}$, $I_C = 5 \text{ mA}$ $I_F = 20 \text{ mA}$, $I_C = 5 \text{ mA}$
f_c	Cut-Off frequency OPIA815 OPIA4010	1.0 -	6.0 7.0	- -	K Hz	$V_{CC} = 2 \text{ V}$, $I_C = 20 \text{ mA}$, $R_L = 100 \Omega$ $V_{CC} = 5 \text{ V}$, $I_C = 2 \text{ mA}$, $R_L = 100 \Omega$
t_r	Rise Time OPIA815 OPIA4010	- -	80 60	300 300	μs	$V_{CC} = 2 \text{ V}$, $I_C = 20 \text{ mA}$, $R_L = 100 \Omega$ $V_{CC} = 2 \text{ V}$, $I_C = 20 \text{ mA}$, $R_L = 100 \Omega$
t_f	Fall Time OPIA815 OPIA4010	- -	72 50	250 250	μs	$V_{CC} = 2 \text{ V}$, $I_C = 20 \text{ mA}$, $R_L = 100 \Omega$ $V_{CC} = 2 \text{ V}$, $I_C = 20 \text{ mA}$, $R_L = 100 \Omega$

Coupled Characteristics

CTR	Current Transfer Ratio OPIA817, OPIA1210 OPIA814 OPIA815 OPIA4010	50 60 70 600	- - - -	600 600 - 9,000	%	$I_F = 5.00 \text{ mA}$, $V_{CE} = 5.0 \text{ V}$ $I_F = 1.00 \text{ mA}$, $V_{CE} = 2.0 \text{ V}$ $I_F = 0.05 \text{ mA}$, $V_{CE} = 3.3 \text{ V}$ $I_F = 1.00 \text{ mA}$, $V_{CE} = 2.0 \text{ V}$
C_f	Floating Capacitance	-	0.6	1.0	pF	$V = 0.0 \text{ V}$, $f = 1 \text{ M Hz}$
R_{ISO}	Isolation Resistance	5×10^{10}	10^{11}	-	ohm	C500V, 40% to 60%RH

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

OPIA817

Fig.6 Collector Current vs.
Collector-Emitter Voltage

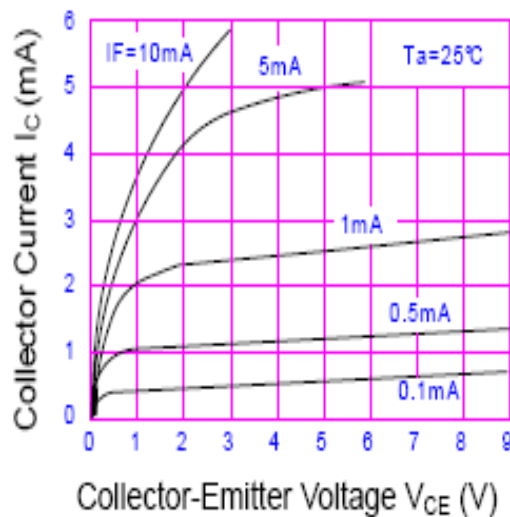


Fig.7 Relative Current Transfer Ratio
vs. Ambient Temperature

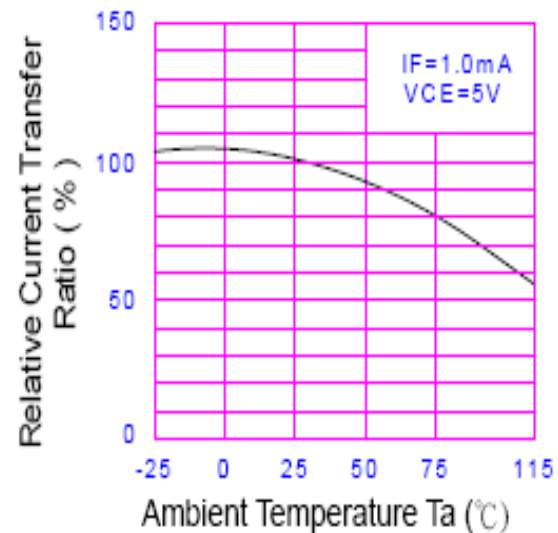


Fig.4 Forward Current vs.
Ambient Temperature


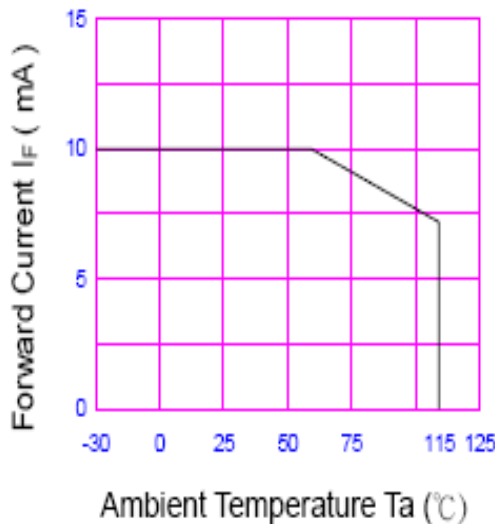


Fig.5 Forward Current vs.
Forward Voltage

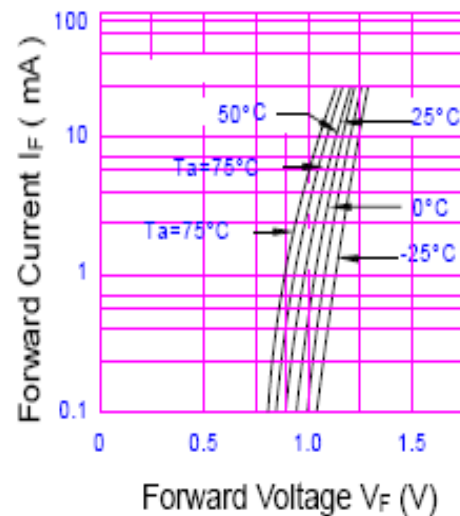

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

OPIA817

Fig.8 Collector-Emitter Saturation Voltage vs. Ambient Temperature

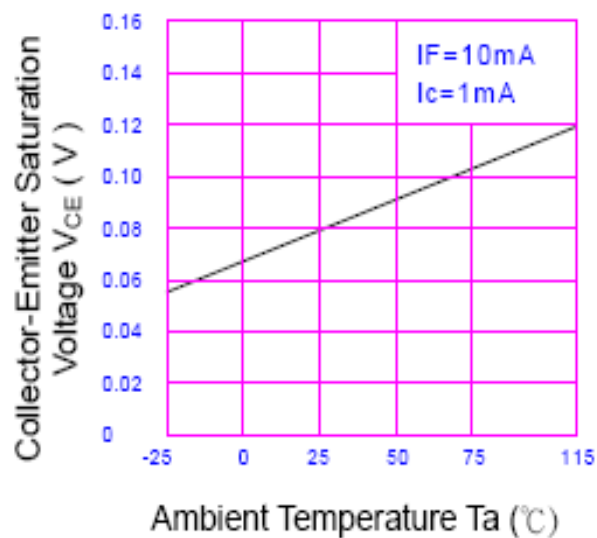


Fig.9 Collector-Emitter Saturation Voltage vs. Forward Current

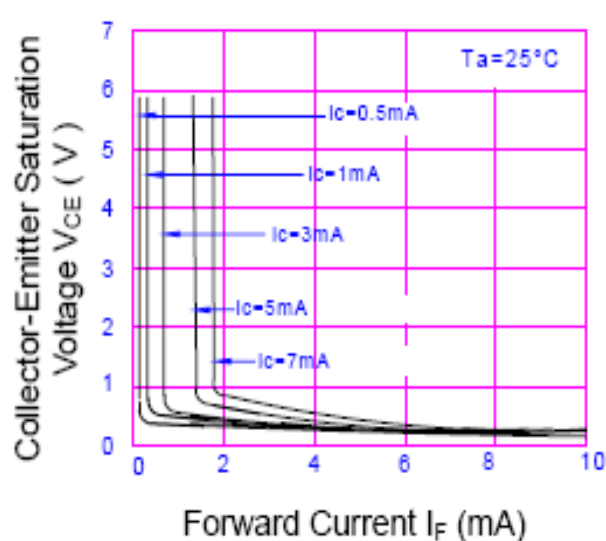


Fig.10 Response Time vs. Load Resistance





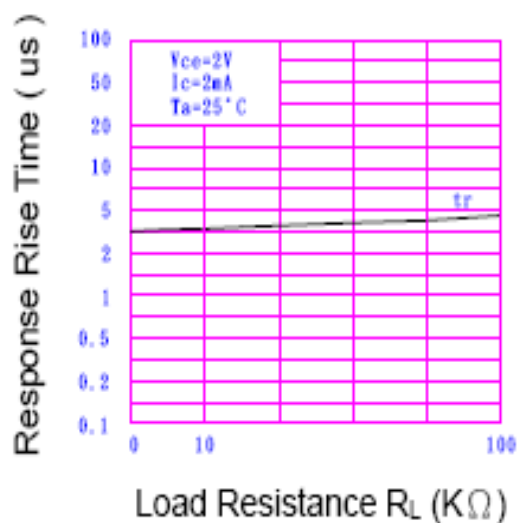


Fig.11 Response Time vs. Load Resistance

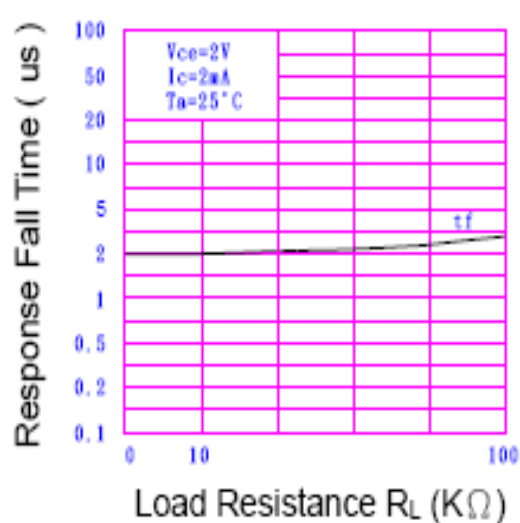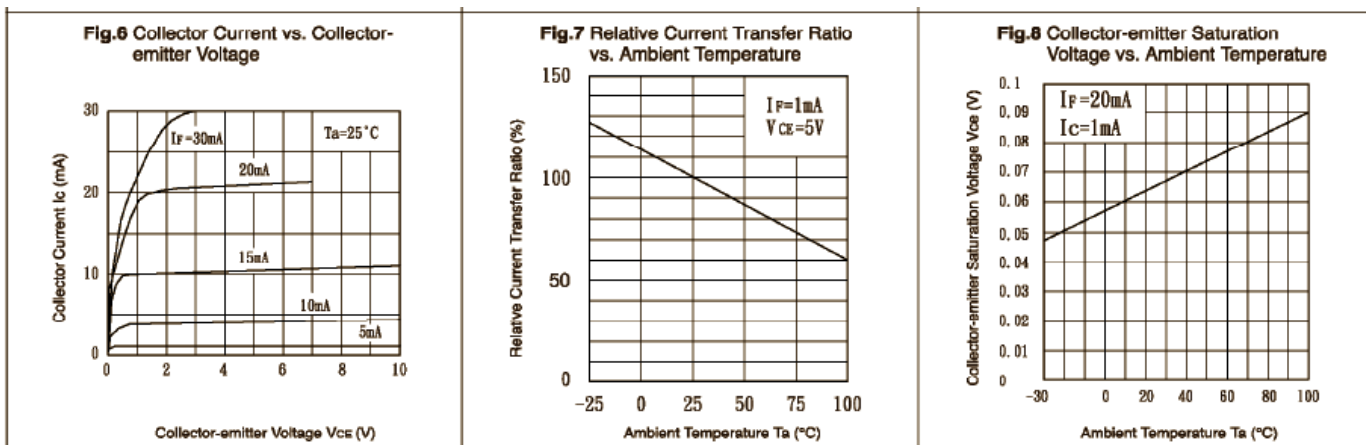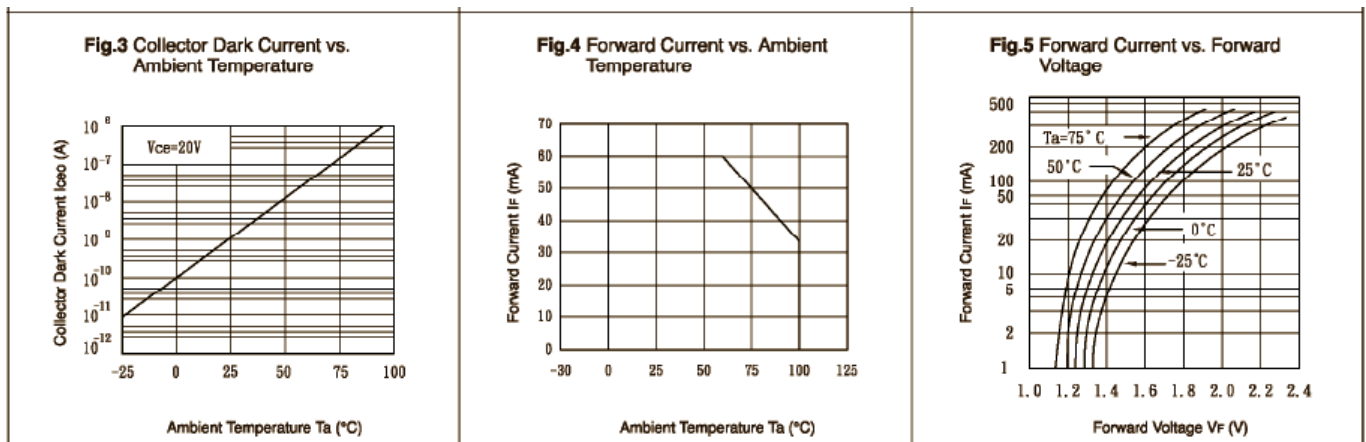

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.


OPIA814

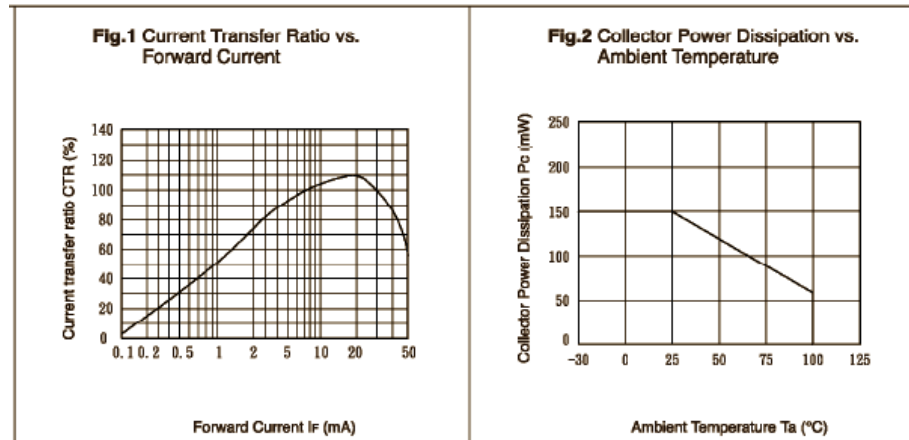

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

OPIA814, OPIA815, OPIA817 OPIA1210, OPIA4010 DIP Package

OPIA814

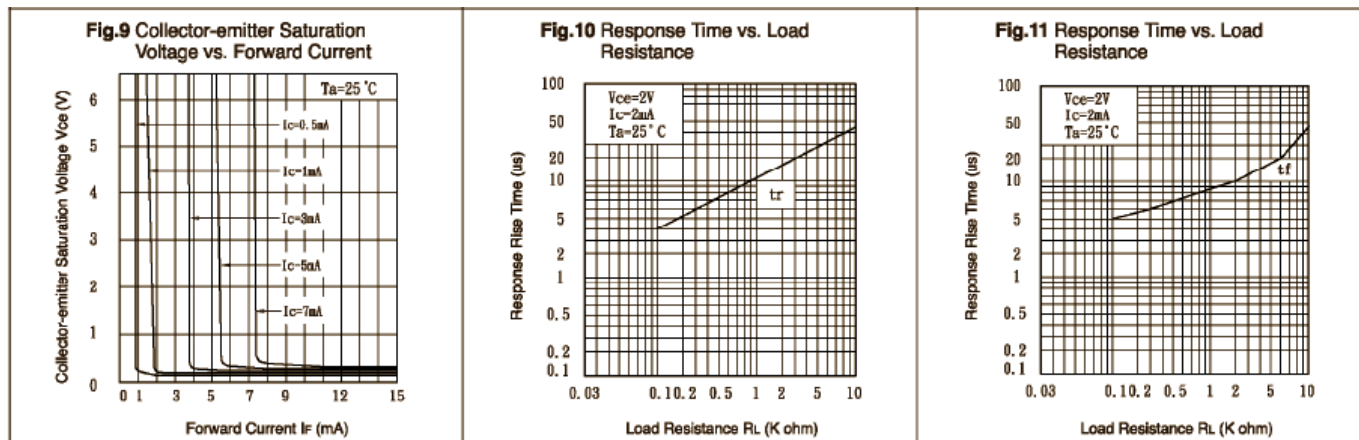

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

OPIA815

Fig.1 Forward Current vs. Ambient Temperature

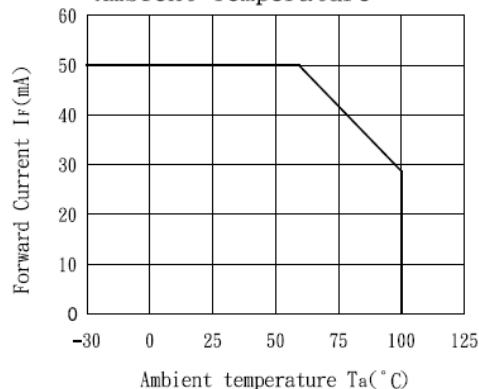


Fig.2 Collector Power Dissipation vs. Ambient Temperature

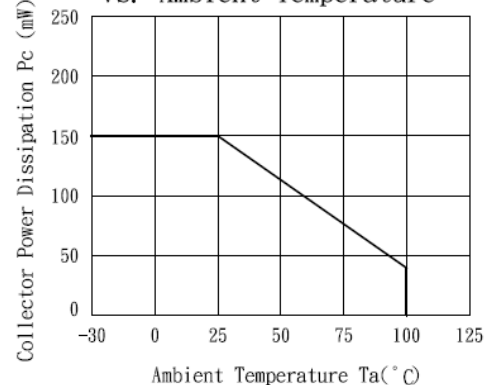


Fig.3 Collector-emitter Saturation Voltage vs. Forward Current

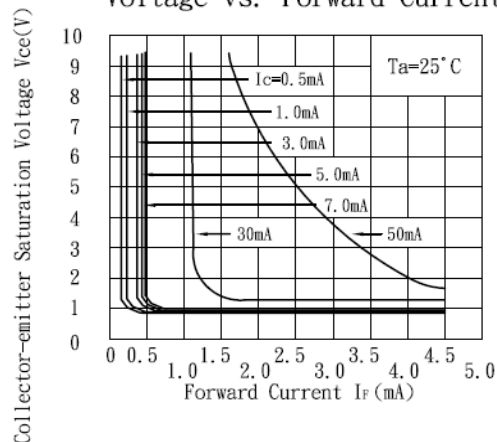


Fig.4 Forward Current vs. Forward Voltage

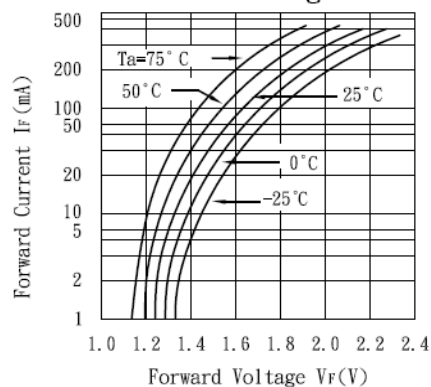


Fig.5 Current Transfer Ratio vs. Forward Current


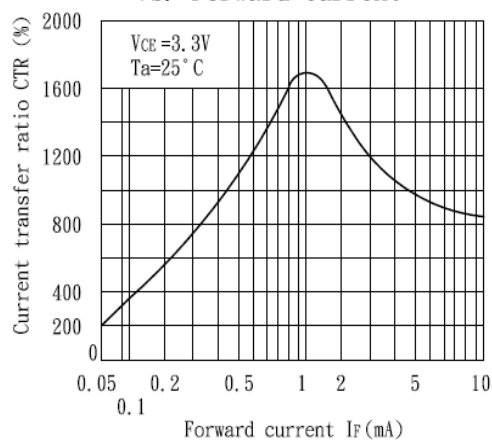


Fig.6 Collector Current vs. Collector-emitter Voltage

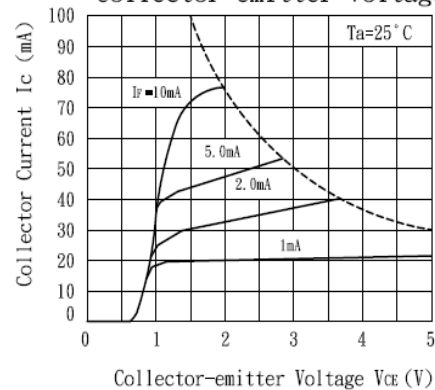

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

OPIA815

Fig.7 Relative Current Transfer Ratio vs. Ambient Temperature

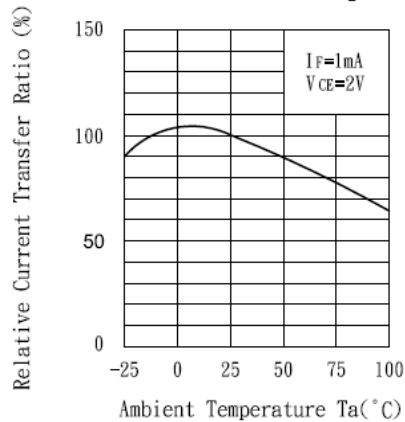


Fig.7 Collector-emitter Saturation Voltage vs. Ambient Temperature

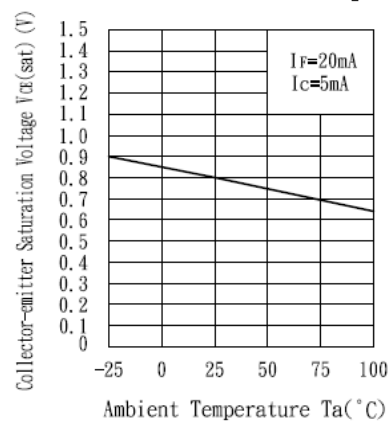


Fig.9 Collector Dark Current vs. Ambient Temperature


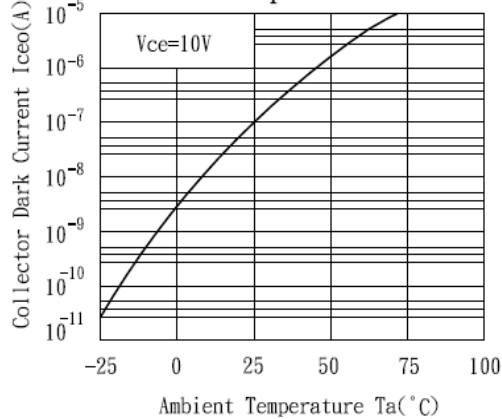


Fig.10 Response Time vs. Load Resistance

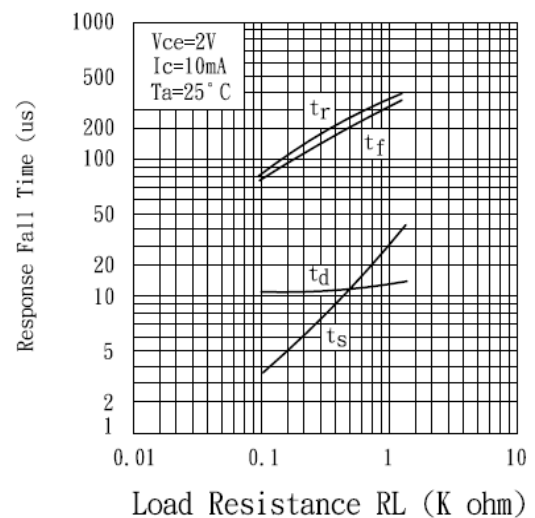

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

OPI412

Fig. 4 Forward Current vs. Ambient Temperature

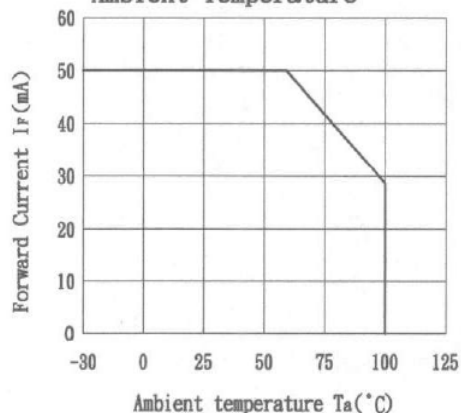


Fig. 5 Forward Current vs. Forward Voltage

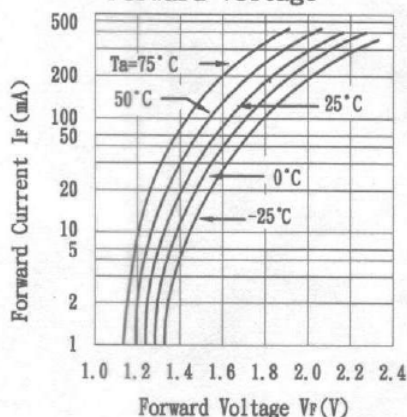


Fig. 2 Collector Power Dissipation vs. Ambient Temperature

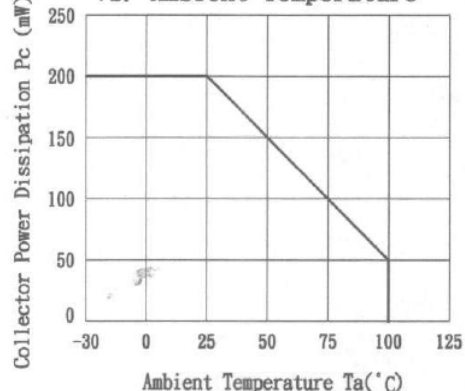


Fig. 3 Collector Dark Current vs. Ambient Temperature

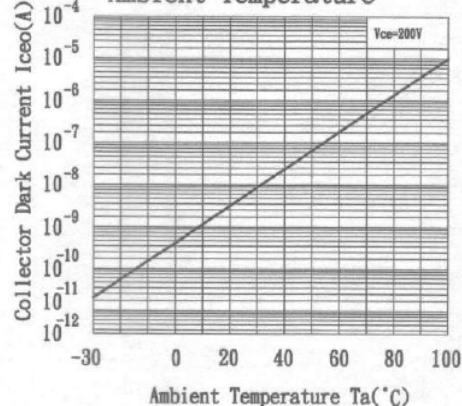


Fig. 6 Collector Current vs. Collector-emitter Voltage


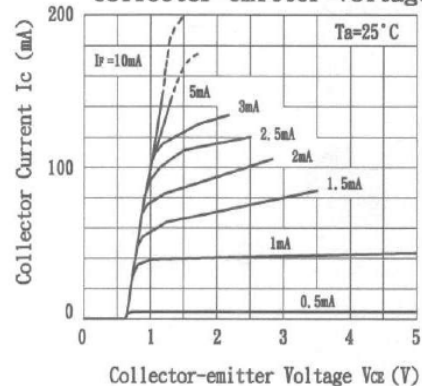


Fig. 7 Relative Current Transfer Ratio vs. Ambient Temperature

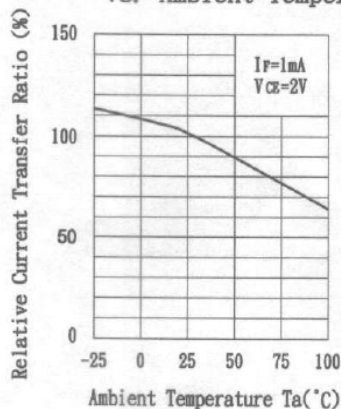

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

OPI412

Fig. 8 Collector-emitter Saturation Voltage vs. Forward Current


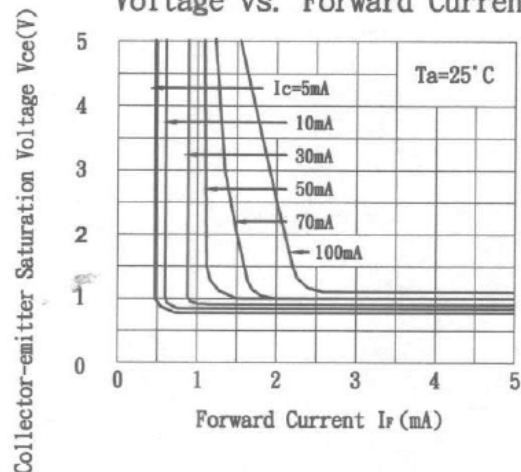


Fig. 9 Response Time vs. Load Resistance

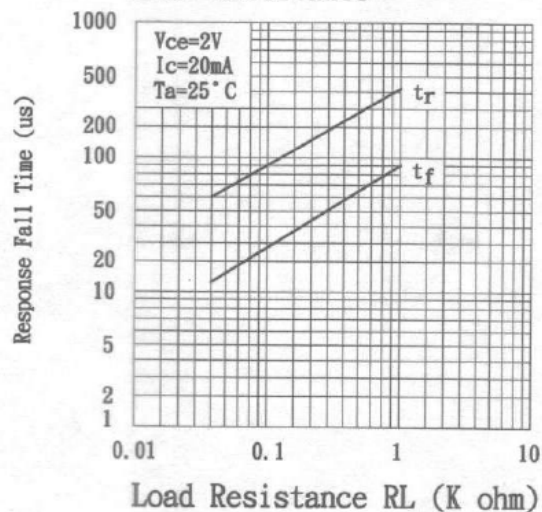

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

OPIA1210

Fig. 1 Current Transfer Ratio
Vs. Forward Current

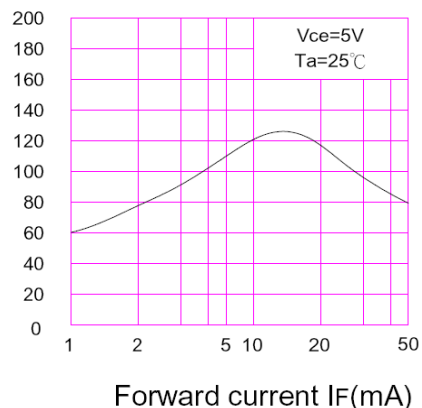


Fig.10 Response Time vs.
Load Resistance

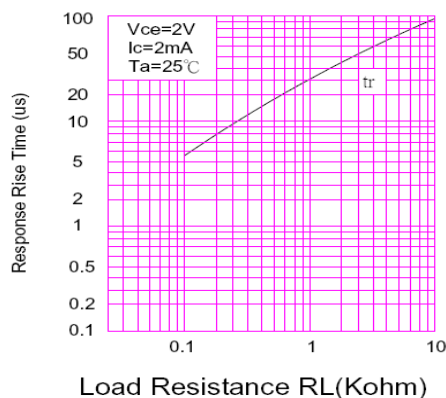


Fig.11 Response Time vs.
Load Resistance

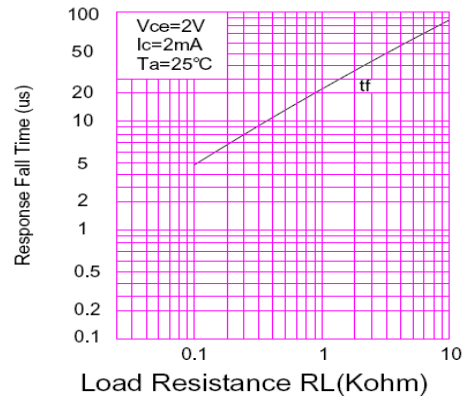


Fig.8 Collector-emitter Saturation
Voltage vs. Ambient Temperature


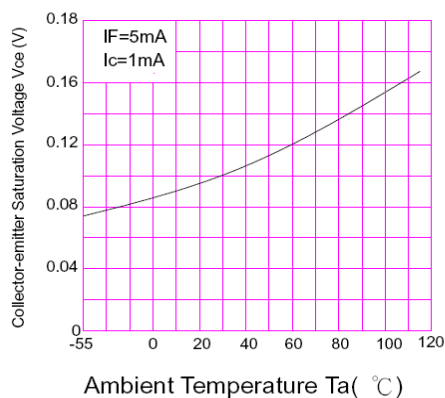


Fig.9 Collector-emitter Saturation
Voltage vs. Forward Current

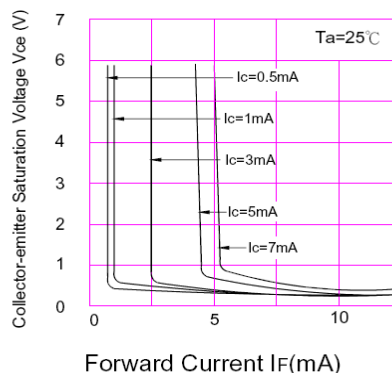

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

OPIA1210

Fig.4 Forward Current vs.
Ambient Temperature

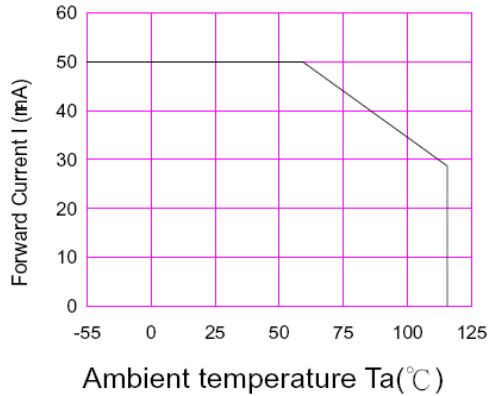


Fig.5 Forward Current vs.
Forward Voltage

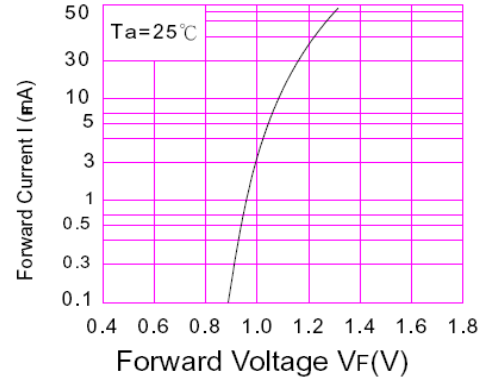


Fig.6 Collector Current vs.
Collector-emitter Voltage

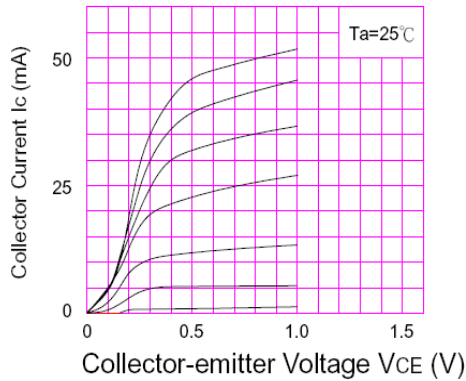


Fig.7 Relative Current Transfer Ratio
vs. Ambient Temperature

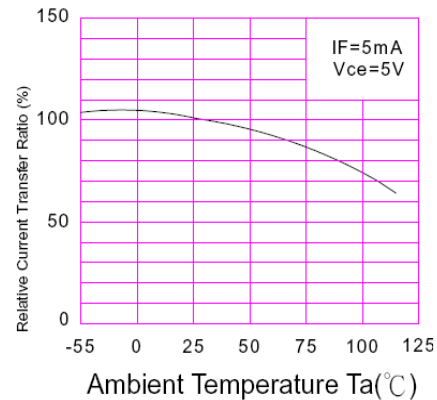


Fig.2 Collector Power Dissipation
vs. Ambient Temperature


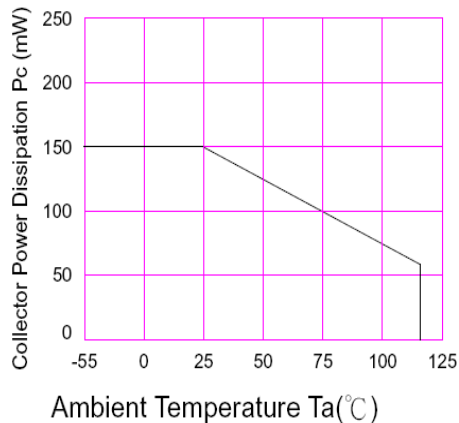


Fig.3 Collector Dark Current vs.
Ambient Temperature



OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

OPIA814, OPIA815, OPIA817 OPIA1210, OPIA4010 DIP Package

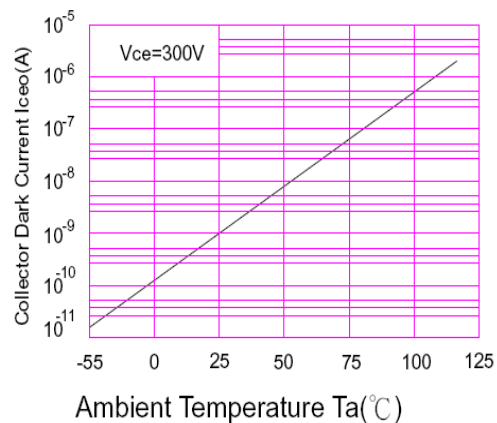

Quality / Reliability Requirements

Parameter	Failure Criteria	Conditions
HTRB D I _{C(OFF)}	± 10%	11 samples after 500Hrs
	0 Fail	@ VCE = 5.0VDC, Ta = 70°C
HTFB D I _{C(ON)}	± 10%	50 samples after 96Hrs
	0 Fail	@ Max P _D , Ta = 25°C
MTTF @ 90% confidence	150,000 Min.	@ 25°C, 25mADC
Moisture Sensitivity Level	MSL 1	per JDEC std J-STD-020B
Lead Solderability	0 Fail	per Method 208 of MIL-STD-202.
Glass Transition of body	125°C Min.	DSC test method
Temperature Humidity-Bias	± 20%	85°C, 85%RH, 500Hrs, 80% min I _{ceo}
Temperature Cycle	± 20%	per Method 1010.7 of MIL-STD-883E
High Temperature Storage	± 20%	85°C, 500Hrs
Autoclave	0 Fail	T _A = 121°C, Pressure = 15psi, Humidity = 100%, Time = 96Hrs

Note: This is to be performed when a change occurs to form, fit or function.

Government and Industry Standard Compliance Requirements

European Union's Reduction of Hazardous Substances (RoHS) Directive 2002/95/EC

Label Identification

DESCRIPTION:

Size: 3" (7.4 cm) X 2.2" (5.5 cm)
Lettering shall be black on white background.
Format shall be as:

Notes:

- The DATE CODE is a 4-digit code for date of manufacture where YY is the last two digits of the year, and WW is week number of manufacture.
- The LOT I.D. is the manufacturing location lot identification where Y is the year of manufacture, NNNN is a sequential lot identifier, and DDD is the day of the year of manufacture. – or use equivalent label format.

 Carrollton, TX, USA MADE IN TAIWAN	
OPTEK P/N <u>OPIA817D-TU</u>	
IIIIIIIIIIIIIIIIIIII	
QTY. <u>N/A</u>	
IIIIIIIIIIIIIIIIIIII	
DATE CODE <u>(YYWW)</u>	
IIIIIIIIIIIIIIIIIIII	
LOT I.D. <u>(Y-NNNNDDD)</u>	
IIIIIIIIIIIIIIIIIIII	

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.


OPIA814, OPIA815, OPIA817 OPIA1210, OPIA4010 DIP Package

Packaging Information:

Optek's Optocoupler Part Numbers		Tube		Inner		Small Carton			Medium Carton			Large Carton		
		Qty	Weight	52 x 7 x 7.5 cm		53.5 x 16 x 17.5 cm			53.5 x 30.7 x 17.5 cm			53.5 x 30.7 x 25 cm		
				Qty	Weight	Qty	Weight	Gross Weight	Qty	Weight	Gross Weight	Qty	Weight	Gross Weight
P/H and SMD	4-PIN OPIA4000/A, OPIA4100/A - OPIA4130/A	100	44	3,000	1.40	12000	6.0	6.5	24000	12.0	12.5	36000	18.0	18.5
	6-PIN OPIA6000/A Series	65	44	1,950	1.50	7,800	6.5	7.0	15600	12.0	12.5	23,400	18.5	19.0
	8-PIN OPIA8000/A Series and OPI8040	48	44	1,440	1.44	5,760	6.0	6.5	11,520	12.0	12.5	17,280	18.0	18.5
MF	OPIA500B, OPIA401B - OPIA404B, OPIA414B	100	24	6,000	1.60	24000	6.5	7.0	48000	13.0	13.5	72000	19.5	20.0
SSOP	OPIA405C - OPIA409C	170	-	10,200	-									


P/H = Pin-Hole Packages (Referred as D = Dual-In-Line Package)
 SMD = Standard Surface Mount Packages (Referred as A = 6.5mil SMD)
 MF or SOP = Mini-Flat Packages or Small Outside Packages (Referred as B=4.40mil SMD w/ 2.54 Lead-Spacing)
 SSOP = Slim SOP Packages (Referred as C = 4.40mil SMD with 1.27 Lead-Spacing)

Tube Packaging Specifications (TU):

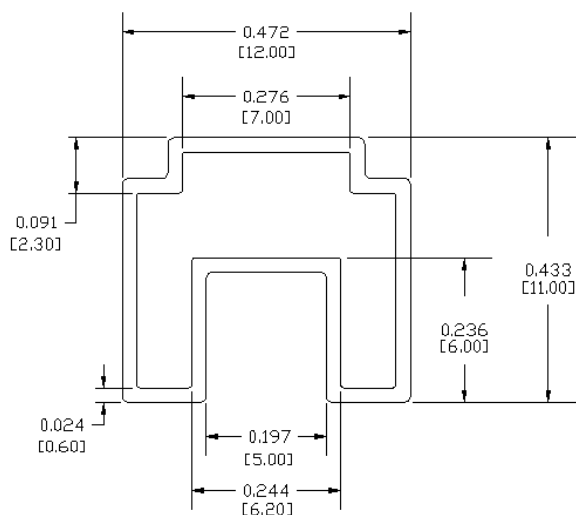

DIMENSIONS ARE IN: INCHES [MILLIMETERS]

TOLERANCE: ± 0.008 INCHES
[± 0.2 MILLIMETERS]

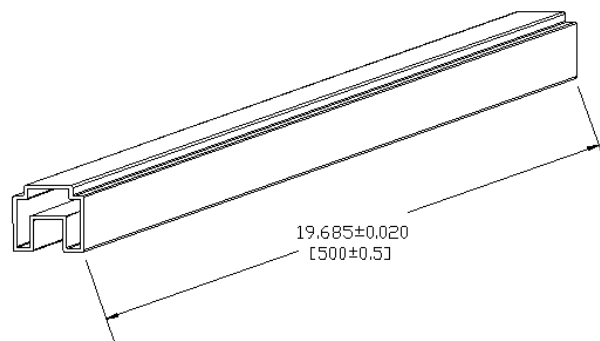

Quantity: 4-pin: 100pcs/tube

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.